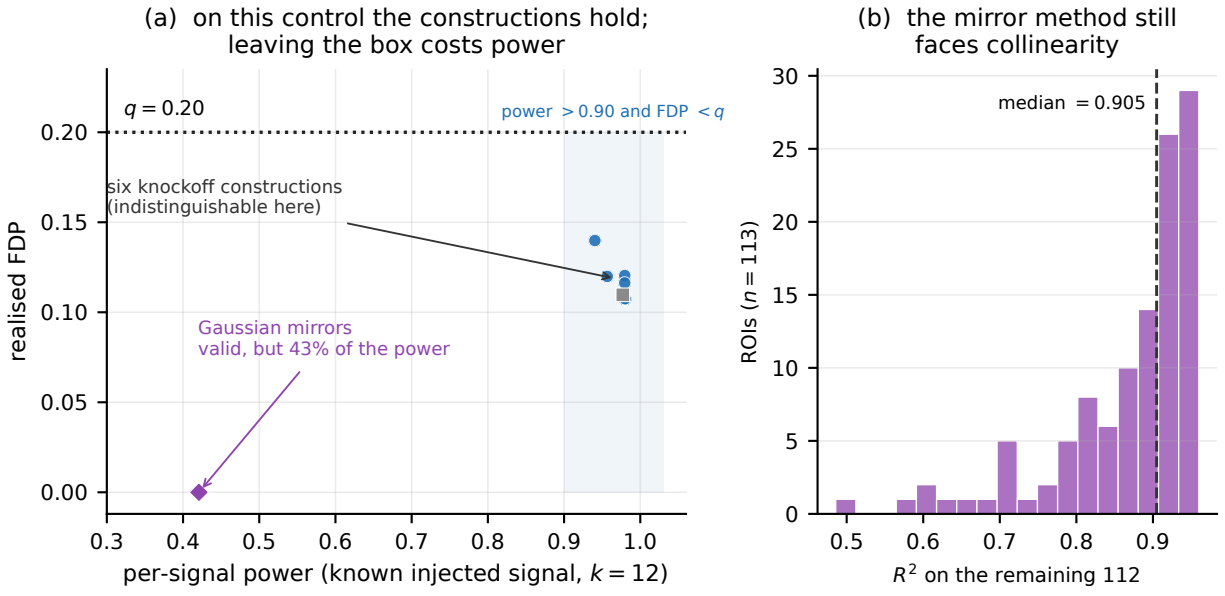
(a) on this control the constructions hold;
leaving the box costs power
$q = 0.20$
power > 0.90 and FDP $< q$
six knockoff constructions
(indistinguishable here)
Gaussian mirrors
valid, but 43% of the power
realised FDP
0.20
0.15
0.10
0.05
0.00
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0
per-signal power (known injected signal, $k = 12$)
(b) the mirror method still
faces collinearity
median $= 0.905$
ROIs ($n = 113$)
30
25
20
15
10
5
0
0.5
0.6
0.7
0.8
0.9
R^2 on the remaining 112