

2

3


4

5

6

Customer No.:

Approve by Customer:

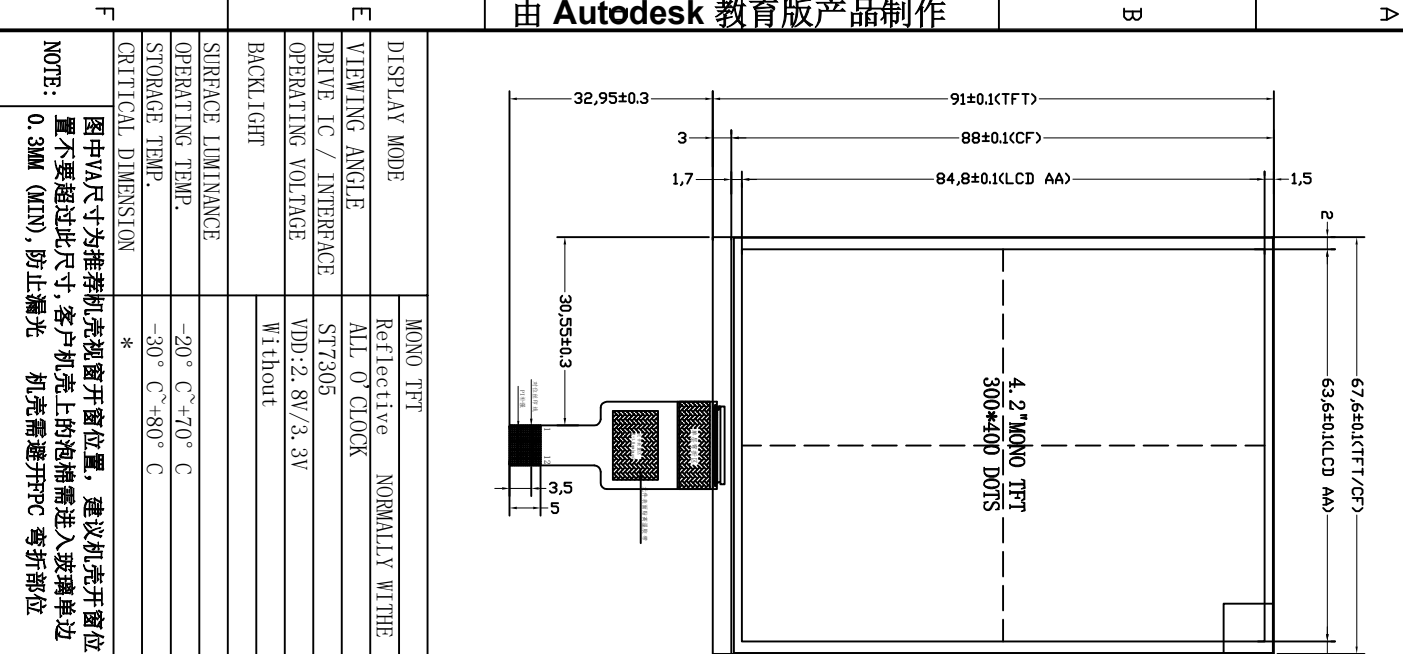

DISPLAY MODE		MONO TFT
VIEWING ANGLE		Reflective NORMALLY WHITE
DRIVE IC / INTERFACE		ALL 0' CLOCK ST7305
OPERATING VOLTAGE		VDD:2.8V/3.3V
BACKLIGHT		Without
SURFACE LUMINANCE		
OPERATING TEMP.		-20° C~+70° C
STORAGE TEMP.		-30° C~+80° C
CRITICAL DIMENSION		*
NOTE:		图中V/A尺寸为推荐机壳视窗开窗位置, 建议机壳开窗位置不要超过此尺寸, 客户机壳上的泡棉需进入玻璃单边0.3MM (MIN), 防止漏光 机壳需避开FPC 弯折部位

AMEND		TOLERANCE		W420HC018MOND-12Z		walecom technology co.,td	
NO.		DECIMAL	.x ± .30	DWN	DSN	0755-32882855	
NO.	First	230302	.xx ± .20	CHKD	APPD		
NO.	CONTENT	DATE	± 1/4°	INT IN SCALE	UNIT mm	SHEET	

展开出货

SPI 4线

Pin	NAME	描述
1	GND	电源地
2	NC	空脚
3	NC	空脚
4	VCI	电源正极2.8/3.3V
5	GND	电源地
6	TE	数据接收模式输入信号输出 不用时, 空置即可
7	DC	数据指令选择脚
8	CS	片选脚
9	SCL	SPI 时钟信号
10	SDA	SPI 数据信号
11	RESET	复位脚
12	GND	电源地

由 Autodesk 教育版产品制作

劲博普兰维复隆 ksepoing 甲

W420HC018MOND-12Z