

Analyzing the Transitional Region in Low Power Wireless Links

Marco Zuniga and Bhaskar Krishnamachari

Department of Electrical Engineering - Systems

University of Southern California, Los Angeles, CA 90089-0781

marcozun@usc.edu, bkrishna@usc.edu

Abstract—In the wireless sensor networks community, there is now an increased understanding of the need for realistic link layer models. Recent experimental studies have shown that real low power wireless deployments have a “transitional region” with highly unreliable links, and that therefore the idealized perfect-reception-within-range models used in common network simulation tools can be very misleading. In this paper, we use mathematical techniques from communication theory to model and analyze low power wireless links. The primary contribution of this work is the identification of the causes of the transitional region, and a quantification of their influence. Specifically, we derive expressions for the packet reception rate as a function of distance, and for the width of the transitional region. These expressions incorporate important radio parameters such as modulation, encoding, output power, frame size and receiver noise; they also incorporate the path loss exponent and the log-normal shadow variance, which are important environmental parameters. A key finding is that for radios using narrow-band modulation, the transitional region is not an artifact of the radio non-ideality, as it would exist even with perfect-threshold receivers because of multi-path fading. However, we hypothesize that radios with mechanisms to combat multi-path effects, such as spread-spectrum and diversity techniques, can reduce the transitional region.

I. INTRODUCTION

Wireless sensor network protocols are often evaluated through simulations that make simplifying assumptions about the link layer, such as the binary perfect-reception-within-range model. Several recent empirical studies [1] [2] [3] have questioned the validity of these assumptions. These studies have revealed the existence of three distinct reception regions in a wireless link: connected, transitional, and disconnected. The transitional region is often quite significant in size, and is generally characterized by high-variance in reception rates and asymmetric connectivity. Particularly, in dense deployments such as

those envisioned for sensor networks, a large number of the links in the network (even higher than 50%) can be unreliable because of the transitional region.

Because of its inherent unreliability and extent, the transitional region can have a considerable impact on the performance of higher layer protocols. For instance, in [1] it is shown that the dynamics of even the simplest flooding mechanism and the topology of data gathering trees constructed in dense sensor networks can be significantly affected by the existence of such unreliable links. In [6] also, it is argued that the routing structures formed taking into account unreliable links can be very different from the structures formed based on a simplistic model. Similarly, the authors of [7] report that such unreliable links can have a significant impact on routing protocols, particularly geographic forwarding schemes. There is, therefore, increased understanding of the need for realistic link layer models for wireless sensor networks.

In order to address this need, some recent works [3] [7] [8] have proposed new link models based on empirical data. Woo *et al.* present a curve fit model for the link packet reception rate as a function of distance for a specific radio and a specific environment. Zhou *et al.* present the radio irregularity model (RIM) which provides for anisotropic radio coverage. Cerpa *et al.* have undertaken an large collection of empirical radio measurements using the SCALE tool and have used it to generate statistical models for different specific radio and environmental settings. While these empirical models do play an invaluable role in improving the realism of protocol evaluation, they suffer from some significant shortcomings. They do not provide fundamental insight into the root causes of the observed phenomena. And they do not provide a systematic way to generalize the models (i.e., extend their validity and accuracy) beyond the specific radio and environment conditions of the experiments from which the models are derived.

On the other hand, there exists a rich literature on wireless communications, particularly in the context of

cellular telecommunication networks¹, that provides a set of models and tools for analyzing the physical layer. In this study, we make use of these analytical tools, particularly expressions for the log-normal shadowing path loss model (to model the environment) and the bit-error performance of various modulation and encoding schemes with respect to the signal to noise ratio (to model the radio). We combine these to derive expressions for the packet reception rate as a function of distance for different settings. We use these in turn to determine the width of the transitional region, allowing us to quantify and analyze how it is impacted by important radio parameters such as modulation, encoding, output power, frame size and receiver noise, as well as important environmental parameters, namely, the path loss exponent and the log-normal shadow variance.

The analysis done in this work allow us to provide some important contributions. First, it allows us to delimit the influence of the wireless environment and the radio on the transitional region. Second, we are able to conclude that, for radios using narrow-band modulation, the transitional region is present even with perfect-threshold radios (i.e., that it is not an artifact of radio non-ideality alone) due to shadowing effects; hence, radios with mechanisms to combat multi-path may significantly reduce the transitional region. And third, we are able to bring to the notice of the community simple analytical models for the link layer that can be used to enhance simulations. The models presented have a general methodology and can be used for a number of different configurations and hardware designs.

The rest of the paper is organized as follows. Section II positions our work in the current literature. The basic framework of the model is derived in section III; it shows, for simple modulation and encoding schemes, how the channel and radio models determine the transitional region. In section IV, the model is extended for different environments, encoding schemes, and frames size; we introduce the transitional region coefficient Γ as a mean to measure the quality of the link by taking into account the width of the different regions. Section V shows empirical experiments used to validate and enhance the correctness of the model, and provides theoretical models for several scenarios. Finally, we present our conclusions and future work in section VI.

II. RELATED WORK

Recent experimental studies [1] [2] [3] identify the existence of three distinct reception regions in the wire-

less link: connected, transitional, and disconnected. This behavior deviate to a large extend from the idealized disc-shape model used in most published results. In [6], Kotz *et al.* provide data demonstrating the unrealistic nature of some common assumptions used in MANET research. In real scenarios, packet losses lead to different connectivity graphs, and coverage ranges that are neither circular nor convex, and are often noncontiguous.

Several researchers have pointed out that the use of simple radio models may lead to wrong simulation results in upper-layers. In one of the earliest works, Ganesan *et al.* [1] presented empirical results from flooding in a dense sensor network and study different effects at the link, MAC, and application layers. They found that the flooding tree exhibits a high clustering behavior, in contrast to the more uniformly distributed tree obtained with a disc shape model.

Zhao *et al.* [2] report measurements of packet delivery for a sixty-node test-bed in different indoor and outdoor environments. They study the impact of the wireless link in packet delivery at the physical and MAC layers. At the physical layer they implemented different encoding schemes, and at the MAC layer they tested different traffic loads.

In [5], De Couto *et al.* present measurements for DSDV and DSR, over a 29 node 802.11b test-bed and show that when the real channel characteristics are not taken into account, the minimum hop-count metric has poor performance. By incorporating the effects of link loss ratios, asymmetry, and interference, they present the *expected transmission count* metric which finds high throughput paths. On the same line of work, Woo *et al.* [3] study the effect of link connectivity on distance-vector based routing in sensor networks. By evaluating link estimator, neighborhood table management, and reliable routing protocols techniques, they found that cost-based routing using a *minimum expected transmission* metric shows good performance.

Lal [9] *et al.* propose *link inefficiency* as a metric for link quality that can be use for energy efficient routing. The quality of the link is based on the RSSI of the received signal. They found that reasonably few channel measurements are sufficient to obtain a good estimate of the cost metric.

More recently, Zhou *et al.* [7] report that radio irregularity has a significant impact on the routing protocols, but a relatively small impact on the MAC protocols. They also found that location-based routing protocols, such as Geographic Forwarding perform worse in the presence of radio irregularity than on-demand protocols, such as AODV and DSR.

Through empirical studies, the previous works bring

¹We should note that in the cellular context the transitional region is not of interest (except in modeling inter-cell interference) as cells are designed to fit only the connected region.

to light the impact that the channel behavior has on protocol performance at different layers. However, for large-scale networks, on-site testing may be unfeasible and models for simulators will be needed. In order to help overcoming this problem some tools and models have been recently proposed. SCALE [4], is a network wireless measurement tool that facilitates the gathering of packet delivery statistics at the same environment targeted for deployment.

In [3], the authors derive a packet loss model based on aggregate statistical measures such as mean and standard deviation of packet reception rate (PRR). The model assumes a gaussian distribution of the packet reception rate for given transmitter-receiver distance, which is not accurate.

Cerpa *et al.* [8], in addition to model properties of a single link, identify other factors for link modelling. They capture features of groups of links associated with a particular receiver, a particular transmitter, a particular radio, and links associated with a group of radios that are geographically close. Using several statistical techniques, they provide a spectrum of models of increasing complexity and increasing accuracy.

A most recent model, called the Radio Irregularity Model (RIM), was proposed in [7]. Based on experimental data, RIM takes into account both the non-isotropic properties of the propagation media and the heterogeneous properties of devices.

While these models are important steps towards a realistic channel model, their main drawback is that they are valid only for the parameters used in the deployment, among those we have: modulation, encoding, packet size, environment characteristics, noise floor and output power. If these parameters are modified the empirical model is either not valid or not accurate.

On the other hand, years of research in wireless communications, particularly cellular networks, provide a rich set of models and tools for analyzing the physical layer [13]. Two of these tools are of significant importance to understand the transitional region, path loss models (to model the environment) and the probability of bit error (to model the radio).

The research done so far has identified the channel modelling problem and its impact on upper-layer protocols, it also has proposed some realistic channel models. However, what is missing is a clear understanding of the causes of the link behavior. Our work provides theoretical models for the link layer showing how packet reception rates vary with distance for different radios and environments, and presents an in-depth analysis of the transitional region.

III. DELIMITING RESPONSIBILITIES FOR THE TRANSITIONAL REGION: THE CHANNEL AND THE RADIO

The transitional region is the result of placing specific devices, for example MICA2 motes, in an specific environment, like the aisle of a building. With the intend of analyzing *how the channel and the radio determine the transitional region*; first, we define models for both elements, to subsequently study their interaction.

A. The Wireless Channel

When an electromagnetic signal propagates, it may be diffracted, reflected and scattered. These effects have two important consequences on the signal strength. First, the signal strength decays exponentially with respect to distance. Second, for a given distance d , the signal strength is random and log-normally distributed about the mean distance-dependent value.

Due to the unique characteristics of each environment, most radio propagation models use a combination of analytical and empirical methods. One of the most common radio propagation models, for large and small [12] coverage systems, is the log-normal shadowing path loss model [13]²:

$$PL(d) = PL(d_0) + 10n \log_{10}\left(\frac{d}{d_0}\right) + X_\sigma \quad (1)$$

Where d is the transmitter-receiver distance, d_0 is a reference distance, n is the path loss exponent (rate at which signal decays), and X_σ is a zero-mean Gaussian random variable (in dB) with standard deviation σ (shadowing effects)³.

The received signal strength (P_r) at a distance d is the output power of the transmitter minus $PL(d)$. Figure 1 shows an analytical propagation model for $n = 4$, $\sigma = 4$, $PL(d_0) = 55$ dB and an output power of 0 dBm.

B. The Radio

To facilitate the explanation of the radio model, this subsection assumes NRZ encoding. Section IV provides models for other encoding schemes.

The steps followed to derive the radio model are similar to the ones in [9]. Let P_i be a Bernoulli random variable, where P_i is 1 if the packet is received and 0 otherwise. Then, for r transmissions, the packet reception rate is defined by $\frac{1}{r} \sum_{i=1}^r P_i$. Since P_i 's are i.i.d. random

²The model is valid only for the transmission frequency and environment where the data was gathered.

³ n and σ are obtained through curve fitting of empirical data; $PL(d_0)$ can be obtained empirically or analytically (using the free space model).

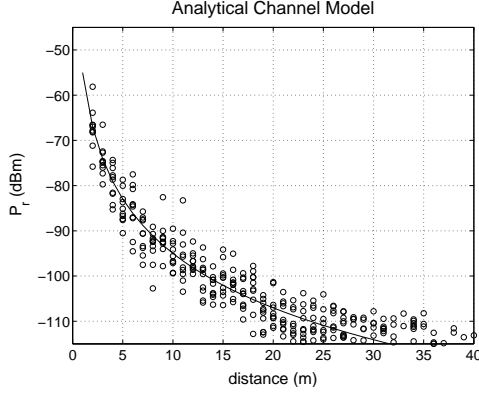


Fig. 1. Radio Propagation Model, $n = 4$, $\sigma = 4$, $P_t = 0$ dBm

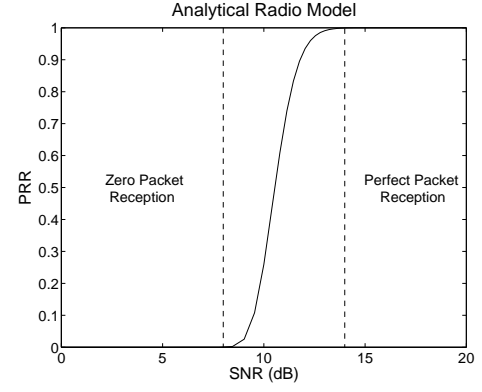


Fig. 2. Receiver Response: Non-Coherent FSK, NRZ radio, $f = 50$ bytes

variables, by the weak law of large numbers PRR can be approximated by $E[P_i]$, where $E[P_i]$ is the probability of successfully receiving a packet.

When NRZ is used, $1 \text{ Baud} = 1 \text{ bit}$, hence the probability p of successfully receiving a packet is:

$$\begin{aligned} p &= (1 - P_e)^{8\ell} (1 - P_e)^{8(f-\ell)} \\ &= (1 - P_e)^{8f} \end{aligned} \quad (2)$$

Where f is the frame size ⁴, ℓ is the preamble (both in bytes), and P_e is the probability of bit error. P_e depends on the modulation scheme, for non-coherent FSK (MICA2), P_e is given by:

$$P_e = \frac{1}{2} \exp^{-\frac{\gamma}{2}} \quad (3)$$

Where γ is the SNR. Finally, the PRR p can be defined as:

$$p = \left(1 - \frac{1}{2} \exp^{-\frac{\gamma}{2}}\right)^{8f} \quad (4)$$

The curve in figure 2 shows equation 4 (receiver response) for a frame size of 50 bytes. As we shall see later, this curve plays an important role in determining the different regions.

C. The Noise Floor

Another important element that determines the transitional region is the noise floor, which depends on both, the radio and the environment. The temperature of the environment influences the thermal noise generated by the radio components (noise figure). The environment can further influence the noise floor due to interfering signals. When the receiver and the antenna have the same ambient temperature the noise floor is given by [13]:

⁴A frame consists of: preamble, network payload (packet) and CRC

$$P_n = (F + 1)kT_0B \quad (5)$$

Where F is the noise figure, k the Boltzmann's constant, T_0 the ambient temperature and B the equivalent bandwidth. MICA2s use the Chipcon CC1000 radio [14], which has a noise figure of 13 dB and a system noise bandwidth of 30 kHz. Considering an ambient temperature of 300 °K (27 °C, 75 °F) and no interference signals, the noise floor is -115 dBm.

The noise figure provided in [14] is only for the chip, and does not include losses due to board implementations. Hence, the noise figure of the final hardware will be higher. In section V, the noise floor is redefined based on empirical measurements.

D. Putting all Together

Given a transmitting power P_t , the SNR at a distance d is (all powers in dB):

$$\gamma(d) = P_t - PL(d) - P_n \quad (6)$$

Henceforth, the PRR at a distance d for the encoding and modulation assumed in this section is:

$$p(d) = \left(1 - \frac{1}{2} \exp^{-\frac{\gamma(d)}{2}}\right)^{8f} \quad (7)$$

With the aim of obtaining the radius of the different regions, let us bound the connected region to PRRs greater than 0.9, and the transitional region to values between 0.9 and 0.1. If we let γ_U and γ_L be the SNR values (in dB) for PRRs of 0.9 and 0.1 respectively, then from equation 7 we obtain:

$$\begin{aligned} \gamma_U &= 10 \log_{10}(-2 \ln(2(1 - 0.9^{\frac{1}{8f}}))) \\ \gamma_L &= 10 \log_{10}(-2 \ln(2(1 - 0.1^{\frac{1}{8f}}))) \end{aligned} \quad (8)$$

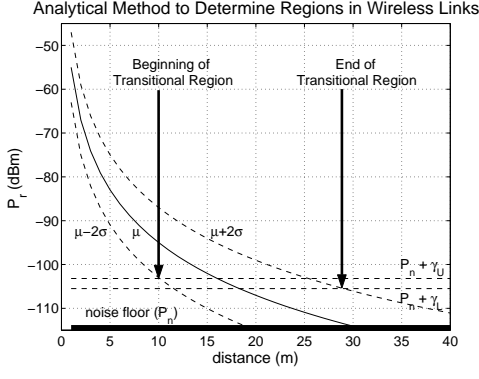


Fig. 3. Analytical Observation of the Transitional Region

The previous equations determine the bounds of the regions in the radio model. Now, let us analyze how these bounds interact with the channel model to define the radius of the different regions at the link layer.

Due to the gaussian characteristic of log-normal shadowing in the path loss model, the received signal strength P_r can be bounded within $\pm 2\sigma$, i.e. $P(\mu - 2\sigma < P_r < \mu + 2\sigma) = .955$. If we let $\overline{PL}(d) = PL(d_0) + 10n\log_{10}(\frac{d}{d_0})$, then, for a given output power P_t , the received power P_r at a distance d is bounded by:

$$\begin{aligned} P_{rU}(d) &= P_t - \overline{PL}(d) + 2\sigma \\ P_{rL}(d) &= P_t - \overline{PL}(d) - 2\sigma \end{aligned} \quad (9)$$

Figure 3 shows the physical interaction of the channel and radio models (equations 8 and 9). The transitional region begins when the P_r values (P_{rL}) enter the $P_n + \gamma_U$ limit, and ends when the P_r values (P_{rU}) leave the $P_n + \gamma_L$ limit. By combining equations 8 and 9, we obtain the conditions for the limits of the different regions:

$$\begin{aligned} P_{rU} &= \gamma_L + P_n \\ P_{rL} &= \gamma_U + P_n \end{aligned} \quad (10)$$

Finally, the beginning (d_s) and end (d_e) of the transitional region are given by:

$$\begin{aligned} d_s &= 10^{\frac{P_n + \gamma_U - P_t + \overline{PL}(d_0) + 2\sigma}{-10n}} \\ d_e &= 10^{\frac{P_n + \gamma_L - P_t + \overline{PL}(d_0) - 2\sigma}{-10n}} \end{aligned} \quad (11)$$

Equation 11 provides absolute values for the radius of the regions. However, a comparison of the regions' size between different scenarios may be desirable. With that aim, we define the *transitional region coefficient* Γ , which is the ratio of the radius of the transitional and connected regions. This coefficient is defined as:

$$\Gamma = \frac{d_e - d_s}{d_s} \quad (12)$$

Which leads to:

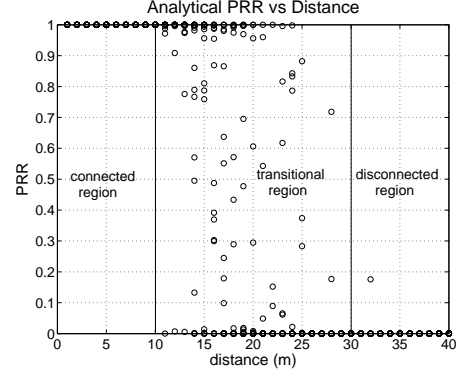


Fig. 4. Analytical PRR vs Distance, obtained through equation 7

$$\Gamma = 10^{\frac{(\gamma_U - \gamma_L) + 4\sigma}{10n}} - 1 \quad (13)$$

The lower the coefficient the better, since that implies a larger connected region compared to the transitional one. For example, in the disc-shape model, $\sigma = 0$ and $\gamma_U = \gamma_L$, which leads to $\Gamma = 0$. It is interesting to observe that the ratio between the regions is independent from the noise floor and output power.

For the parameters chosen in this section (frame size $f = 50$ bytes and transmitting power $P_t = 0$ dBm), $\gamma_U = 11.8$ dB and $\gamma_L = 9.5$ dB, which leads to $d_s = 10$ m, $d_e = 29$ m and $\Gamma = 1.9$. Figure 4 shows the analytical PRR vs distance obtained by equation 7, we observe that the beginning and end of the transitional region match the analytical values obtained.

IV. DETAILED ANALYSIS OF THE MODEL

The theoretical model derived in the previous section provides a general framework to evaluate the transitional region. In this section, we extend the model for different environments and radio characteristics.

Due to space constraints, we focus the analysis of the model on non-coherent FSK, which is the modulation used in the MICA2 architecture. This modulation technique will be the basis to compare the Γ coefficients of diverse environments, with different encoding schemes and frames size. The probability of bit error for other modulation techniques are widely available [13], and can be easily inserted in the model. Section V provides expressions for some common modulation techniques.

A. Fix the Radio Characteristics, Modify the Environment

Due to the numerous applications envisioned for wireless sensor networks, an specific device will be required to work in different environments. The model allows

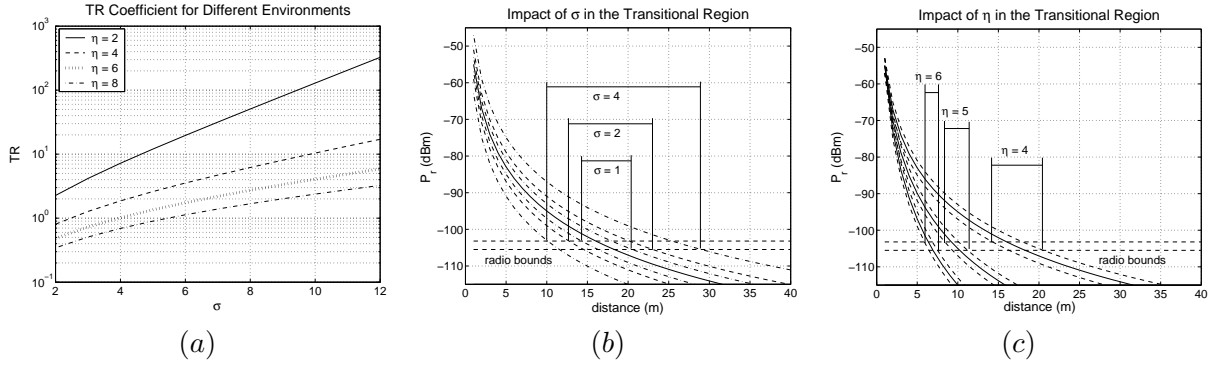


Fig. 5. Analytical Observation of the Impact of the path loss exponent n and the standard deviation of the log-normal shadow term σ on the Transitional Region. (a) transition region Γ coefficients for various σ and n . (b) if σ increases, the transitional region increases. (c) if n increases, the transitional region decreases

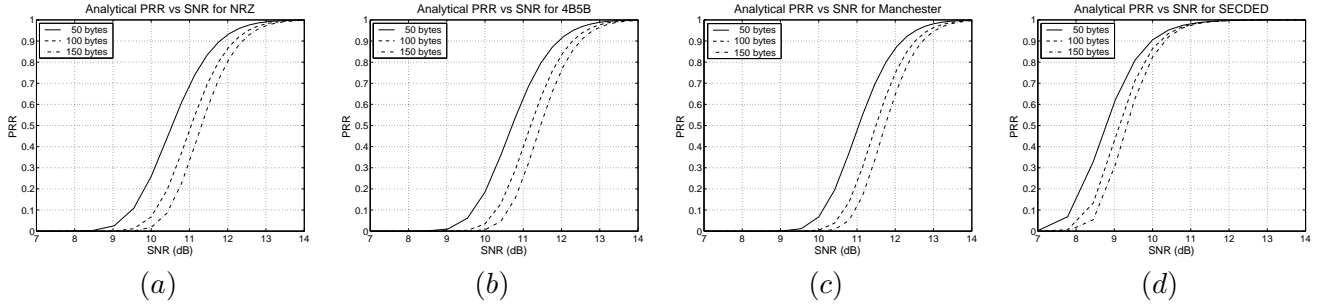


Fig. 6. Receiver Response for Different Encoding Schemes and Frames Size: (a) NRZ, (b) 4B5B, (c) Manchester, (d) SECDED

to estimate the influence that the environment has in the different regions, which can be used to evaluate the performance of the network.

Usually a wireless channel is considered benign if both, the path loss exponent n and the shadowing standard deviation σ are small. Nevertheless, as figure 5 (a) shows, while a small σ decreases the Γ coefficient, a small n increases it. Henceforth, scenarios with high n and low σ are preferable in terms of the Γ coefficient. Figures 5 (b) and (c) show the physical impact of these two parameters in the transitional region.

In figure 5 (b), n is set to 4 and σ has values of 1, 2 and 4. The SNR bounds of the radio model are fixed and independent of the environment, hence, as σ increases, the P_r values have a higher probability of entering the transitional region at closer distances from the transmitter, and leaving it at farther distances; which results in a larger transitional region.

Figure 5 (c) shows the impact of n ; σ is set to 1 and n takes values of 4, 5 and 6; the higher n , the faster the decay of the signal strength and the thinner the width of the transitional region.

Finally, it is important to mention that even though figure 5 (a) shows the curves of a radio using NRZ and frames of 50 bytes, similar trends are observed for other

encoding schemes and frames size.

B. Fix the Environment, Modify the Radio Characteristics

Some WSN applications will require the optimization of the radio for a specific environment. In these cases, it will be important to explore different encoding schemes and observe the influence of the frame size.

Figure 6 shows the radio model (PRR vs SNR) for different encoding schemes⁵ (NRZ, 4B5B, Manchester and SECDED⁶), and various frames size.

For any encoding scheme, as the frame size increases, the SNR bounds increase (curves shift right) which leads to smaller connected regions. On the other hand, for the same frame size, the SNR bounds required by SECDED are the smallest (largest connected region), followed by NRZ, 4B5B and Manchester. This result is due to the error correction capabilities of SECDED, however, it comes at a cost of energy efficiency (encoding ratio 1:3). NRZ, 4B5B, and Manchester does not have error correcting capabilities. Nevertheless, for the same packet size, the encoding ratios are 1:1, 1:1.25 and 1:2 respectively;

⁵The plots represent frames with a preamble length of 2 bytes for all encoding schemes.

⁶SECDED encodes each byte into 24 bits

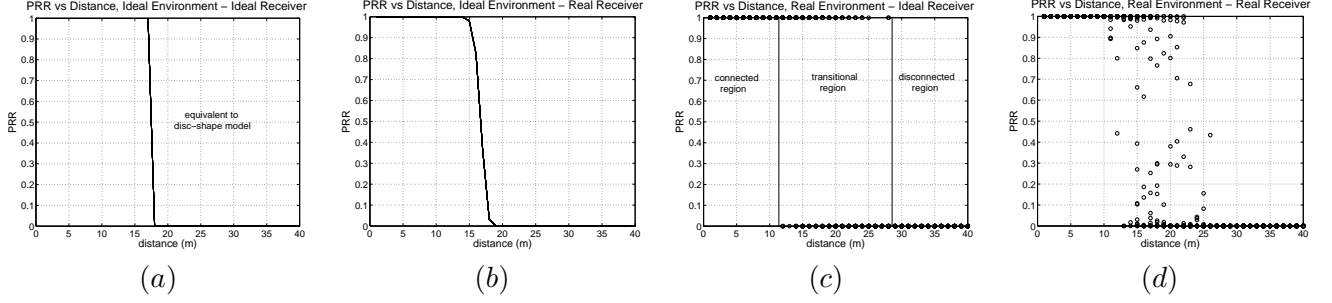


Fig. 7. PRR vs Distance for Ideal and Real Scenarios.

resulting in higher SNRs required, which lead to smaller regions.

Though done for ASK modulation, empirical results for different encoding schemes [2] agree with the expected theoretical behavior, i.e. for the same environment, SECDDED shows a larger connected region than Manchester encoding.

Even though the absolute radius of the regions are of interest in protocol evaluation, and their length can be obtained through equation 11; in the design of the radio, the main goal –with regards to the regions– is to increase the connected region without increasing the transitional one. Henceforth, rather than comparing absolute distances, the Γ coefficient will be used.

Table I shows the $\gamma_U - \gamma_L$ for the different encoding schemes and frames size. The lower the $\gamma_U - \gamma_L$ the thinner the transitional region, SECDDED shows the highest value among the encoding schemes; and, for a given encoding scheme, as the frame size increases, $\gamma_U - \gamma_L$ decreases.

Finally, table II shows the Γ coefficient of different radios in a environment with $n = 4$ and $\sigma = 4$. As we observe, the encoding or frame size do not have a significant impact on the Γ coefficient. No significant impacts were observed for other values of n and σ .

C. Can the transitional region be removed with a perfect-threshold radio?

The previous section shows that modifying the encoding scheme or packet size does not create a significant improvement on the Γ coefficient, these results lead to

encoding	50 bytes	100 bytes	150 bytes
NRZ	2.2785	2.0347	1.9151
4B5B	2.1938	1.9671	1.8551
Manchester	2.0347	1.8384	1.7404
SECDDED	2.5677	2.2180	2.0489

TABLE I

SNR RANGE $\gamma_U - \gamma_L$ FOR A NON-COHERENT FSK, NRZ RADIO

an interesting question: *Can the transitional region be eliminated with a perfect-threshold receiver (i.e. $\gamma_U = \gamma_L$)?*

Figure 7 shows analytical PRR vs distance plots where perfect-threshold and real receivers are placed in ideal and real environments, by ideal environment we refer to one with no shadowing effects ($\sigma = 0$), the real receiver and real environment follow the models derived in section III.

Figure 7 (a) shows the PRR vs distance for a perfect-threshold receiver in an ideal environment, this curve is the disc-shape model commonly used in many simulators. Figure 7 (b) shows a real receiver in an ideal environment, this scenario results in a small and deterministic transitional region, where the PRR decreases monotonically with respect to distance. Figure 7(c) is the most interesting plot, it shows a *perfect-threshold receiver in a real environment*. Even in this ideal scenario, the transitional region is present, nevertheless, since $\gamma_U = \gamma_L$, links would take PRRs of 0 or 1. Finally, figure 7(d) shows the real behavior of the link.

Figure 8 shows the analytical behavior of a perfect-threshold receiver. We can observe that for a perfect-threshold receiver, the transitional region would be caused by the shadowing variance of the environment. Given that the shadowing variance is caused by multi-path effects, we hypothesize that, to have a significant impact in decreasing the transitional region, receivers should use mechanisms that combat multi-path effects, such as spread spectrum and diversity techniques.

encoding	50 bytes	100 bytes	150 bytes
NRZ	1.8639	1.8240	1.8046
4B5B	1.8500	1.8130	1.7950
Manchester	1.8240	1.7923	1.7766
SECDDED	1.9120	1.8540	1.8263

TABLE II

TRANSITIONAL REGION COEFFICIENT Γ FOR A NON-COHERENT FSK, NRZ RADIO

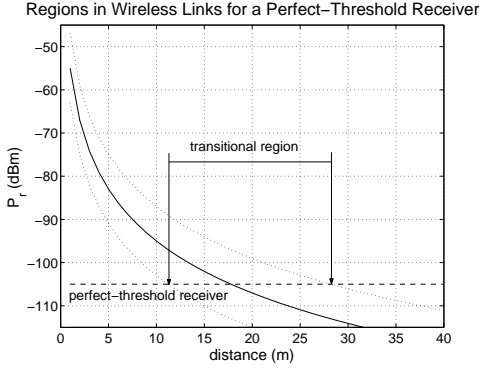


Fig. 8. Analytical Observation of the Transitional Region for an Ideal Receiver.

This subsection provides some important conclusions. First, a perfect-threshold receiver would not solve the transitional region problem due to multi-path effects. In this scenarios, the radio is the cause of obtaining continuous values of PRR, and not '0/1' links; and the environment is the cause of the random (non-monotonically) decreasing trend. Second, given that multi-path effects play a significant role in determining the transitional region, receivers able to combat these effects may improve significantly the quality of the link.

V. EMPIRICAL VALIDATION OF THE MODEL

In order to enhance and validate the theoretical model developed, MICA2 motes were used to perform empirical evaluation. First, we describe the methodology used in the experiments, and redefine the noise floor according to the empirical measurements. After that, the channel parameters, n and σ , are obtained; and the radio model is compared with the empirical results. Finally, we evaluate the accuracy of the analytical link layer model (PRR vs distance).

A. Methodology

Two different environments were tested, an indoor environment (aisle of a building), and an outdoor environment (football field). For each environment, a chain topology of 21 MICA2 motes was deployed with nodes spaced every meter. The frame size was 50 bytes and Manchester encoding was used with a preamble of 28 bytes. A simple TDMA protocol was implemented to avoid collisions. Upon reception of a packet the sequence number and the received signal strength (P_r) were stored; simultaneously, the noise floor was measured by taking samples of the idle channel. For both environments; various power levels were tested (from -20dBm to 5dBm in steps of 1dBm), due to space constraints we present

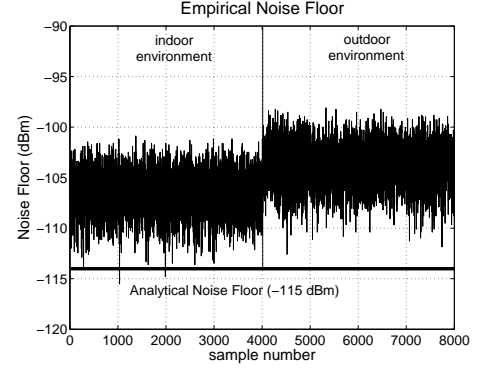


Fig. 9. Empirical Measurements of the Noise Floor for the Indoor and Outdoor Environments.

results for medium (-7 dBm) and high (5 dBm) powers. For each power level, each node transmitted 100 packets, at a rate of 5 packets/sec. After all nodes transmitted their 100 packets, the average P_r (RSSI) and PRR were measured for all the links in the network.

B. The Noise Floor

Figure 9 shows samples of the noise floor for both environments. The average noise floor is approximately -105 dBm⁷, which has a 10 dBm difference with respect to the specified value obtained in section III-C. This difference is mainly due to the fact that in the initial calculation we did not consider the losses from the output of the chip to the antenna. These losses depend on the board implementation and are beyond the scope of this work. Hence, for the model, let us redefine the noise floor to an average value of -105 dBm.

C. The Channel and Radio Models

The channel parameters (n and σ) were obtained from figures 10 (a) and 10 (b). However, there was a small complication to obtain them in the outdoor environment – figure 10 (b). Due to the noise floor, P_r values below -100 dBm were not detected (values were recorded only for received packets). For this reason, only the closest

⁷The difference on the noise floor in both environments may be due to slightly different temperatures, and sensitivity inaccuracies (± 6 dB [14]).

environment	n (95% conf. bounds)	σ (95% conf. bounds)
outdoor	4.7 (4.30 - 5.10)	4.6 (2.80 - 6.40)
indoor	3.0 (2.67 - 3.23)	3.8 (2.60 - 5.00)

TABLE III
CHANNEL PARAMETERS

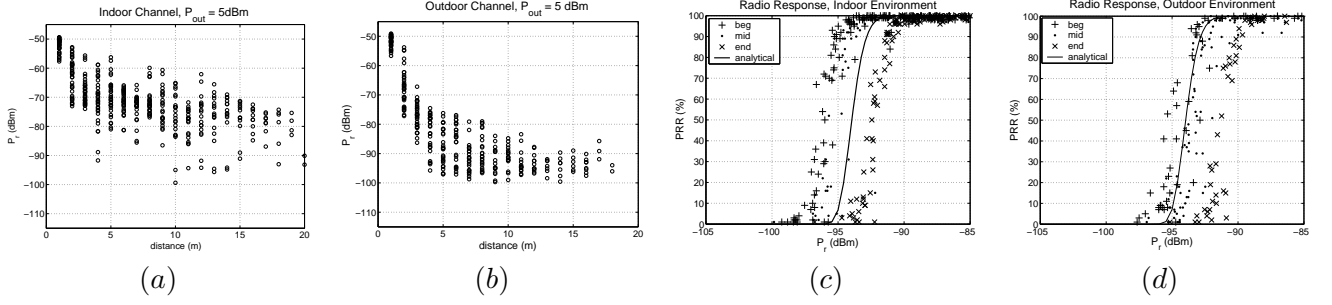


Fig. 10. Empirical Validation of Channel and Radio Models. (a) Indoor Channel, (b) Outdoor Channel, (c) Indoor Radios, (d) Outdoor Radios

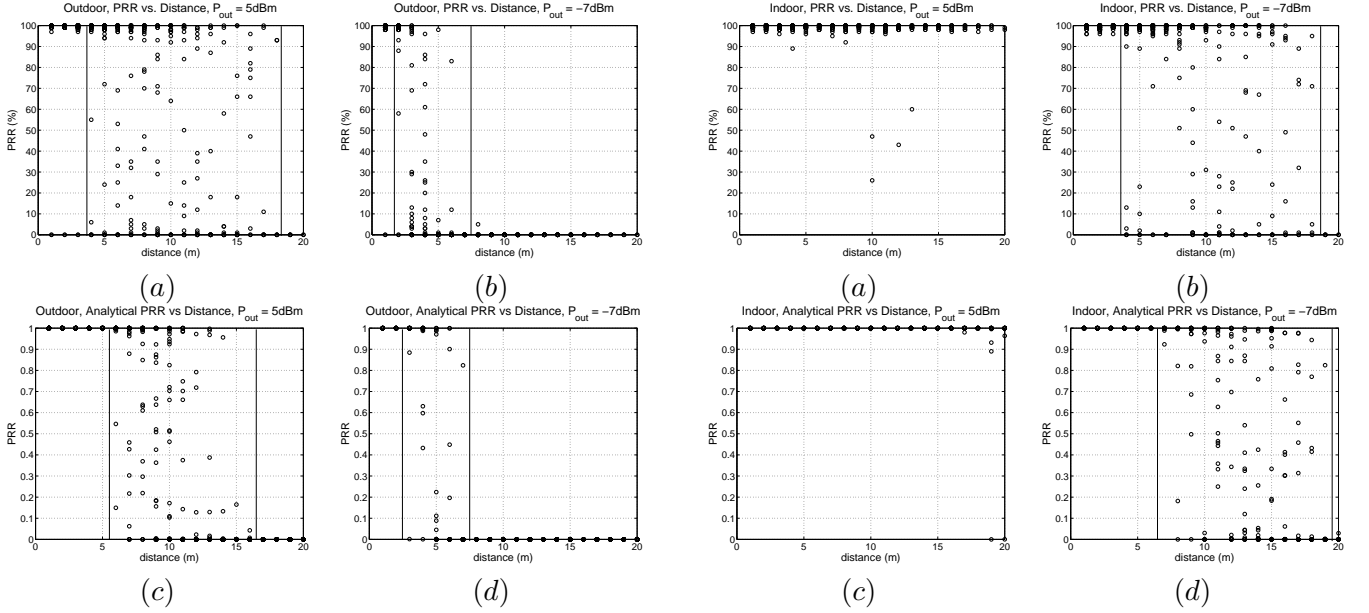


Fig. 11. Empirical Validation of the Model for the Outdoor Channel. (a) and (b) are the empirical measurements, and (c) and (d) their analytical counterparts

Fig. 12. Empirical Validation of the Model for the Indoor Channel. (a) and (b) are the empirical measurements, and (c) and (d) their analytical counterparts

distances (1m~6m) were considered in the curve-fitting. Table III shows the parameters for both environments.

Figures 10 (c) and 10 (d) show the radio model and the PRR vs P_r of three different receivers for both environments; the receivers were located at the beginning, middle and end of the chain. The radio model was obtained from the parameters used in the deployment. Since the model is based on SNRs, it was shifted according to the average noise floor (-105 dBm). An analogous trend is observed on the empirical response of the receivers and the radio model; furthermore, the radio response is independent of the environment due to the similar temperatures in both scenarios.

D. The Link Layer Model

For the parameters described in the methodology subsection, table IV shows the expected radius of the

different regions. Figures 11 and 12 show the empirical and analytical results of the link layer abstraction (PRR vs distance) for the outdoor and indoor environments, respectively.

Figures 11 (a), 11 (b), 12 (a) and 12 (b) correspond to the empirical results; and figures 11 (c), 11 (d), 12 (c) and 12 (d) are their analytical counterparts. The radius obtained in table IV fairly approximate the real behavior.

scenario	d_s (m)	d_e (m)
outdoor-high-power	5.3	14.6
outdoor-medium-power	3.0	8.1
indoor-high-power	15.4	58.8
indoor-medium-power	6.1	23.4

TABLE IV
ANALYTICAL RADIUS OF TRANSITIONAL REGION

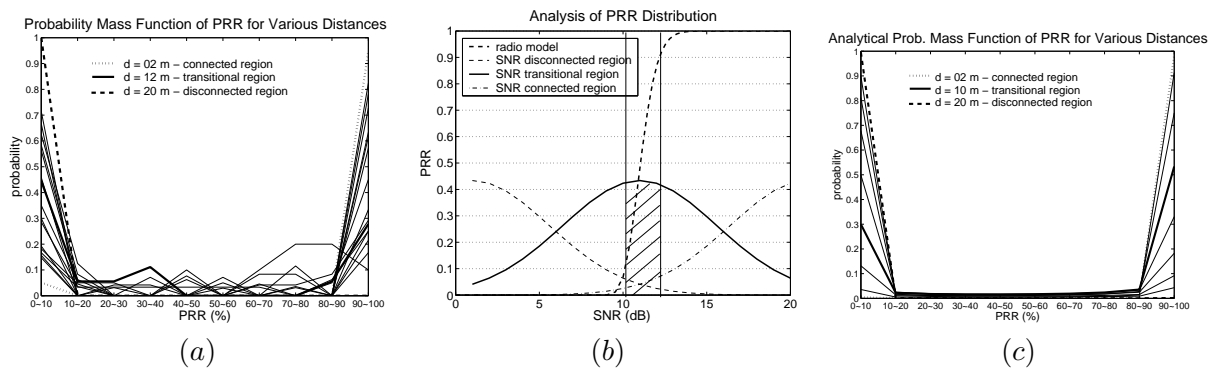


Fig. 13. PRR Distribution for Different Transmitter-Receiver Distances. (a) empirical distribution of the high-power-outdoor environment, (b) analytical observation of the distribution, (c) analytical distribution of the high-power-outdoor environment

Also, by simple inspection a similar distribution of the PRRs is observed. However, in order to verify the correctness of the model, let us compare the empirical and analytical distributions of the PRR as a function of the transmitter-receiver distance.

In figure 13 (a), each curve shows the PRR distribution of a given distance (between 2 and 20 meters, in steps of 1 meter) for the outdoor-high-power scenario. Three curves are specially highlighted, one on each region. As expected, curves in the connected and disconnected regions shows a high probability (almost 1) of having high ($90\% <$) and low ($< 10\%$) PRRs, respectively. However, the curve in the transitional region –all curves in general– show a strong bias to either high or low PRRs, with a small probability of being between 10% and 90%. This behavior can be explained in light of the model derived in this work.

Figure 13 (b) shows the radio model and three SNR distributions of tentative receivers. The left-most distribution represents a node in the disconnected region, where low SNR values result in low PRRs. The right-most curve represents a node in the connected region, which contrary to the previous distribution results in high PRRs. And, the middle curve represents a node in the transitional region.

For the curve in the transitional region, the probability that an SNR value falls within the $\gamma_U - \gamma_L$ region is low compared to the probability of falling either in the high or low regions. It is important to remark -and can be easily observed- that independently of where the SNR distribution is centered, SNR values have a low probability of falling within the $\gamma_U - \gamma_L$ region.

The behavior described in the previous paragraphs causes the bias observed in figure 13 (a). Figure 13 (c) is the analytical counter part of figure 13 (a) for the high-power-outdoor environment. Similar trends are obtained in the other scenarios.

Finally, one of the goals of this work is to provide a realistic link layer model for low power devices. With that aim, table V presents a comprehensive list of equations for different modulation and encoding techniques⁸.

VI. CONCLUSIONS AND FUTURE WORK

The impact that the channel behavior has on the performance of upper-layer protocols in wireless sensor networks requires a clear understanding of the different regions of low power wireless links. We have presented a detailed study of the transitional region. Some of the key contributions and conclusions of this work are as follows:

- We have presented mathematical link layer models for the statistical variation of packet reception rates with respect to distance (for different environment and radio characteristics). This analysis yields the boundaries of the different regions — connected, transitional, and disconnected. It is important to note that the methodology presented here can be easily extended to other radios that use different modulation and encoding schemes.
- We have studied how the width of the transitional region depends on modulation, encoding, output power, frame size, noise floor, and channel parameters.
- We introduced the Γ (transitional region) coefficient as a means to compare the *quality* of the link for different environments. The smaller the coefficient, the better the link.
- We showed that environments with a high path loss exponent n and a small shadowing standard deviation σ , decrease the Γ coefficient.

⁸The model assumes that the preamble is not encoded, and hence is the same for all encoding schemes. Other radio designs may lead to slightly different expressions.

STEP 1 : Channel	Obtain parameters of the channel and use them in next step
$PL(d_0), n, \sigma$	Can be obtained through own empirical measurements, or from some published results [10]
STEP 2 : SNR	Obtain SNR γ as a function of distance d . For MICA2: $-20 \text{ dBm} < P_t < 5 \text{ dBm}$, $P_n = -105 \text{ dBm}$
$\gamma_{dB}(d)$	$P_t - PL(d_0) - 10n \log_{10}(\frac{d}{d_0}) - N(0, \sigma) - P_n$
STEP 3 : Modulation	Choose P_e according to the modulation used, and insert $\gamma(d)$ not in dB, i.e. $10^{\frac{\gamma_{dB}(d)}{10}}$
Non-Coherent ASK	$\frac{1}{2} [\exp^{-\frac{\gamma(d)}{2}} + Q(\sqrt{\gamma(d)})]$
Coherent ASK	$Q(\sqrt{\frac{\gamma(d)}{2}})$
Non-Coherent FSK	$\frac{1}{2} \exp^{-\frac{\gamma(d)}{2}}$
Coherent FSK	$Q(\sqrt{\gamma(d)})$
BPSK	$Q(\sqrt{2\gamma(d)})$
DPSK	$\frac{1}{2} \exp^{-\gamma(d)}$
STEP 4 : Encoding	Choose packet reception rate $p(d)$ according to the encoding scheme, frame and preamble lengths
NRZ	$(1 - P_e)^{8\ell} (1 - P_e)^{8(f-\ell)}$
4B5B	$(1 - P_e)^{8\ell} (1 - P_e)^{8(f-\ell)1.25}$
Manchester	$(1 - P_e)^{8\ell} (1 - P_e)^{8(f-\ell)2.0}$
SECCED	$(1 - P_e)^{8\ell} ((1 - P_e)^8 + 8P_e(1 - P_e)^7)^{(f-\ell)3.0}$

TABLE V
THEORETICAL MODELS FOR THE LINK LAYER

- We showed that while the frame size and encoding scheme influences the radius of the regions, their ratio (Γ coefficient) is not significantly affected.
- Even with a perfect-threshold radio, the transitional region still exists so long as there are multi-path effects. However, we hypothesize that radios with mechanisms to combat multi-path effects, such as spread-spectrum and diversity techniques, can reduce the transitional region.

A. Future Work

Even though interference was not considered, the channel model can be used to extend the P_r signals beyond the transitional region, and consider them as noise. However, a more detailed study may be needed to accurately quantify the impact of interference in the different regions.

Our work focused on the spatial variation of the link and we did not consider the time domain. We believe that time variations are mainly due to the fluctuations in the noise floor if the environment is static (i.e. static nodes, and no dynamic objects around them). These could be modelled by a gaussian distribution of the noise floor. Hence, to simulate time-variant links in a static environment, a filter may be used to generate AWGN and use it as the noise floor for each P_r sample, instead of the deterministic value assumed in this work. For more challenging dynamic environments, richer time-varying fading models will be required. We would also

like to extend our modeling and analysis to more sophisticated radios that implement techniques such as spread spectrum and multi-antenna diversity to combat fading effects.

ACKNOWLEDGEMENT

We would like to acknowledge assistance from and useful conversations with several people including Alec Woo, Dr. Jerry Zhao, Prof. John Heidemann, Dr. Robert Poor, and Prof. Scott Shenker.

REFERENCES

- [1] D. Ganesan, B. Krishnamachari, A. Woo, D. Culler, D. Estrin and S. Wicker. "Complex Behavior at Scale: An Experimental Study of Low-Power Wireless Sensor Networks". UCLA CS Technical Report UCLA/CSD-TR 02-0013, 2002.
- [2] J. Zhao and R. Govindan. "Understanding Packet Delivery Performance in Dense Wireless Sensor Networks". ACM Sensys, November 2003.
- [3] A. Woo, T. Tong, and D. Culler. "Taming the Underlying Issues for Reliable Multihop Routing in Sensor Networks". ACM SenSys, November 2003.
- [4] A. Cerpa, N. Busek, and D. Estrin. "SCALE: A tool for Simple Connectivity Assessment in Lossy Environments". CENS Technical Report, September 2003.
- [5] D. S. J. De Couto, D. Aguayo, J. Bicket, and R. Morris. "A High-Throughput Path Metric for Multi-Hop Wireless Routing". ACM MobiCom, September 2003.
- [6] D. Kotz, C. Newport and C. Elliott. The mistaken axioms of wireless-network research. Technical Report TR2003-467, Dept. of Computer Science, Dartmouth College, July 2003.

- [7] G. Zhou, T. He, S. Krishnamurthy, and J. A. Stankovic. "Impact of radio irregularity on wireless sensor networks". International Conference on Mobile Systems, Applications and Services, 2004.
- [8] A. Cerpa, J. L. Wong, L. Kuang, M. Potkonjak and D. Estrin. "Statistical Model of Lossy Links in Wireless Sensor Networks". CENS Technical Report 0041, April 2004.
- [9] D. Lal, A. Manjeshwar, F. Herrmann, E. Uysal-Biyikoglu, A. Keshavarzian. "Measurement and Characterization of Link Quality Metrics in Energy Constrained Wireless Sensor Networks". Globecom 2003.
- [10] K. Sohrabi, B. Manriquez, and G. Pottie, "Near Ground Wide-band Channel Measurement", Vehicular Technology Conference IEEE, volume 1, pages 571-574, 1999.
- [11] Jaein Jeong and Cheng Tien Ee. "Forward Error Correction in Sensor Networks". Department of Electrical Engineering and Computer Science University of California, Berkeley, Technical Report, May 2003.
- [12] S. Y. Seidel and T. S. Rapport. 914 MHz Path Loss Prediction Model for Indoor Wireless Communication in Multi oored Buildings. In IEEE Transactions on Antennas and Propagation, volume 40(2), pages 207-217, February 1992.
- [13] Theodore S. Rappaport. "Wireless Communications: Principles and Practice". Prentice Hall.
- [14] Chipcon. CC1000 low power radio transceiver, <http://www.chipcon.com>.
- [15] Crossbow. Mica2 wireless measurement system, <http://www.xbow.com>.