

Hebei Xinbang Packaging Materials Co., Ltd. (QLHB) is a high-tech enterprise founded in 2000 and headquartered in Shijiazhuang, China. We specialize in the R&D and manufacturing of eco-friendly water-based adhesives, offering tailored bonding solutions for the paper packaging and material lamination industries.

With an advanced R&D center and cutting-edge testing equipment, we have built strong industry-academic partnerships and invested over RMB 30 million in innovation. Xinbang serves clients across 30+ sectors with hundreds of adhesive models, providing fully customized solutions.

We hold ISO9001, IATF16949, SGS, RoHS, and REACH certifications, and have earned the EcoVadis Silver Medal for sustainability performance.



Partial List of Our Partners

Factory workshop record （Click on Here or the photo bellow to view it）



The picture of the equipment in the document is for reference only, please refer to the actual equipment picture shall prevail.

These are our company's products

1.High-Speed Folder Gluer Adhesive 306 (306P)

Model: QL-306 (306P)



Product Features:

Designed for high-speed folder gluer machines with roller coating, stable up to 400 meters/min without splashing.



Excellent temperature resistance. Ideal for cup sleeves, color boxes, pharmaceutical boxes, and card boxes.



306P version: optimized for high-speed spraying, anti-clogging, no tail dripping.

Product Properties:

Appearance: Milky white with light yellow tint.

Solid Content: 50% ±2 (105°C, 2h)

pH Value: 6.0-8.0

Heat Resistance: ≥80°C, <120°C

Cold Resistance: ≥-30°C, < -40°C

Applications:

Paper/Paper, Paper/BOPP film (surface tension ≥38 dyne), Paper/Gold & Silver card.

For UV varnish or water-based coating surfaces, trial use is recommended.

Packing:

20KG/Drum

2. Semi-Automatic Gluing Adhesive 118GH

Model: QL-118GH



Product Features:

Suitable for semi-automatic gluing machines with roller coating. Versatile adhesive for corrugated cartons, pharmaceutical boxes, cosmetic boxes.

Product Properties:

Appearance: Milky white with light yellow tint.

Solid Content: 50% ±2 (105°C, 2h)

pH Value: 6.0-8.0

Heat Resistance: ≥60°C, <80°C

Cold Resistance: ≥-30°C, < -40°C

Applications:

Paper/Paper, Paper/BOPP film (≥32 dyne), Paper/Gold & Silver card, Paper/water-based varnish.

Packing:

25KG/Drum

3. Manual Application Adhesive 108H

Model: QL-108H



Product Features:

Manual brushing glue with long open time, easy to apply, no stringing, low odor, smooth flow.

Ideal for paper bags, corrugated cartons, color boxes; works well on low surface energy materials.

Product Properties:

Appearance: Milky white with light yellow tint.

Solid Content: 48% ±2 (105°C, 2h)

pH Value: 6.0-8.0

Heat Resistance: ≥65°C, <80°C

Cold Resistance: ≥-15°C, < -30°C

Applications:

Paper/Paper, Paper/BOPP film (≥32 dyne), Paper/Gold & Silver card.

Packing:

25KG/Drum

4. Automatic Inline Gluing Adhesive 719P

Model: QL-719P



Product Features:

Suitable for high-speed inline gluing of 5-ply, 7-ply, and corrugated board.

Strong initial tack, fast running speed, compatible with kraft paper, white card, flexo print, red envelopes, envelopes.

Product Properties:

Appearance: Milky white liquid.

Solid Content: 50% ±2 (105°C, 2h) - PH 值： 6.0-8.0

pH Value: 6.0-8.0

Heat Resistance: ≥80°C, <100°C

Cold Resistance: ≥-30°C, < -40°C

Applications: Paper/Paper

Packing:

50KG/Drum

5. Carton Box Gluing Adhesive



Product Features:

Versatile adhesive for manual, semi-auto, high-speed, and inline carton gluing.

Suitable for industrial cartons, yellow board cartons, e-commerce boxes.

Smooth flow, no splashing, no stringing.

Product Properties:

Appearance: Milky white semi-transparent liquid.

Solid Content: 8% ±1 (105°C, 2h)

pH Value: 6.5-7.5

Viscosity: 1000-3000 CPS @25°C

Packing:

25KG/50KG/1000KG Drum

6. Glue Making Machine



Model	QL-300	QL-600	QL-1100
Maximum Power	18KW	30KW	40KW
Dimension	1800mm*1500mm*1700mm	2000mm*1700mm*2400mm	2200mm*1800mm*2600mm
Wiring Specification	GB Standard Copper Wire ≥ 6mm²	GB Standard Copper Wire ≥ 10mm²	GB Standard Copper Wire ≥ 16mm²
Maximum Capacity	300L	600L	1100L
Power Requirement	GB Standard 380V Three-Phase, Four-Wire with Ground		
Material	Stainless Steel		

Product Features:

Fully automatic operation, labor-saving.

Can use regular household AC power, no space limitation.

Applications:

Used to produce carton glue, laminating glue, starch glue, kraft paper glue, etc.

7. Film Lamination Adhesive QL-3800



Product Features:

Designed for medium-speed lamination (approx. 50 m/min).

Good leveling and water resistance.

Suitable for dairy, fruit, and FMCG packaging.

Product Properties:

Appearance: White emulsion.

Solid Content: 38%

Viscosity: 50-1000 mPa.s

pH Value: 6-9


Shelf Life: 6 months

Operating Temp: ≥0°C

Packing:

50KG/1000KG Drum

8. Hot Melt Adhesive

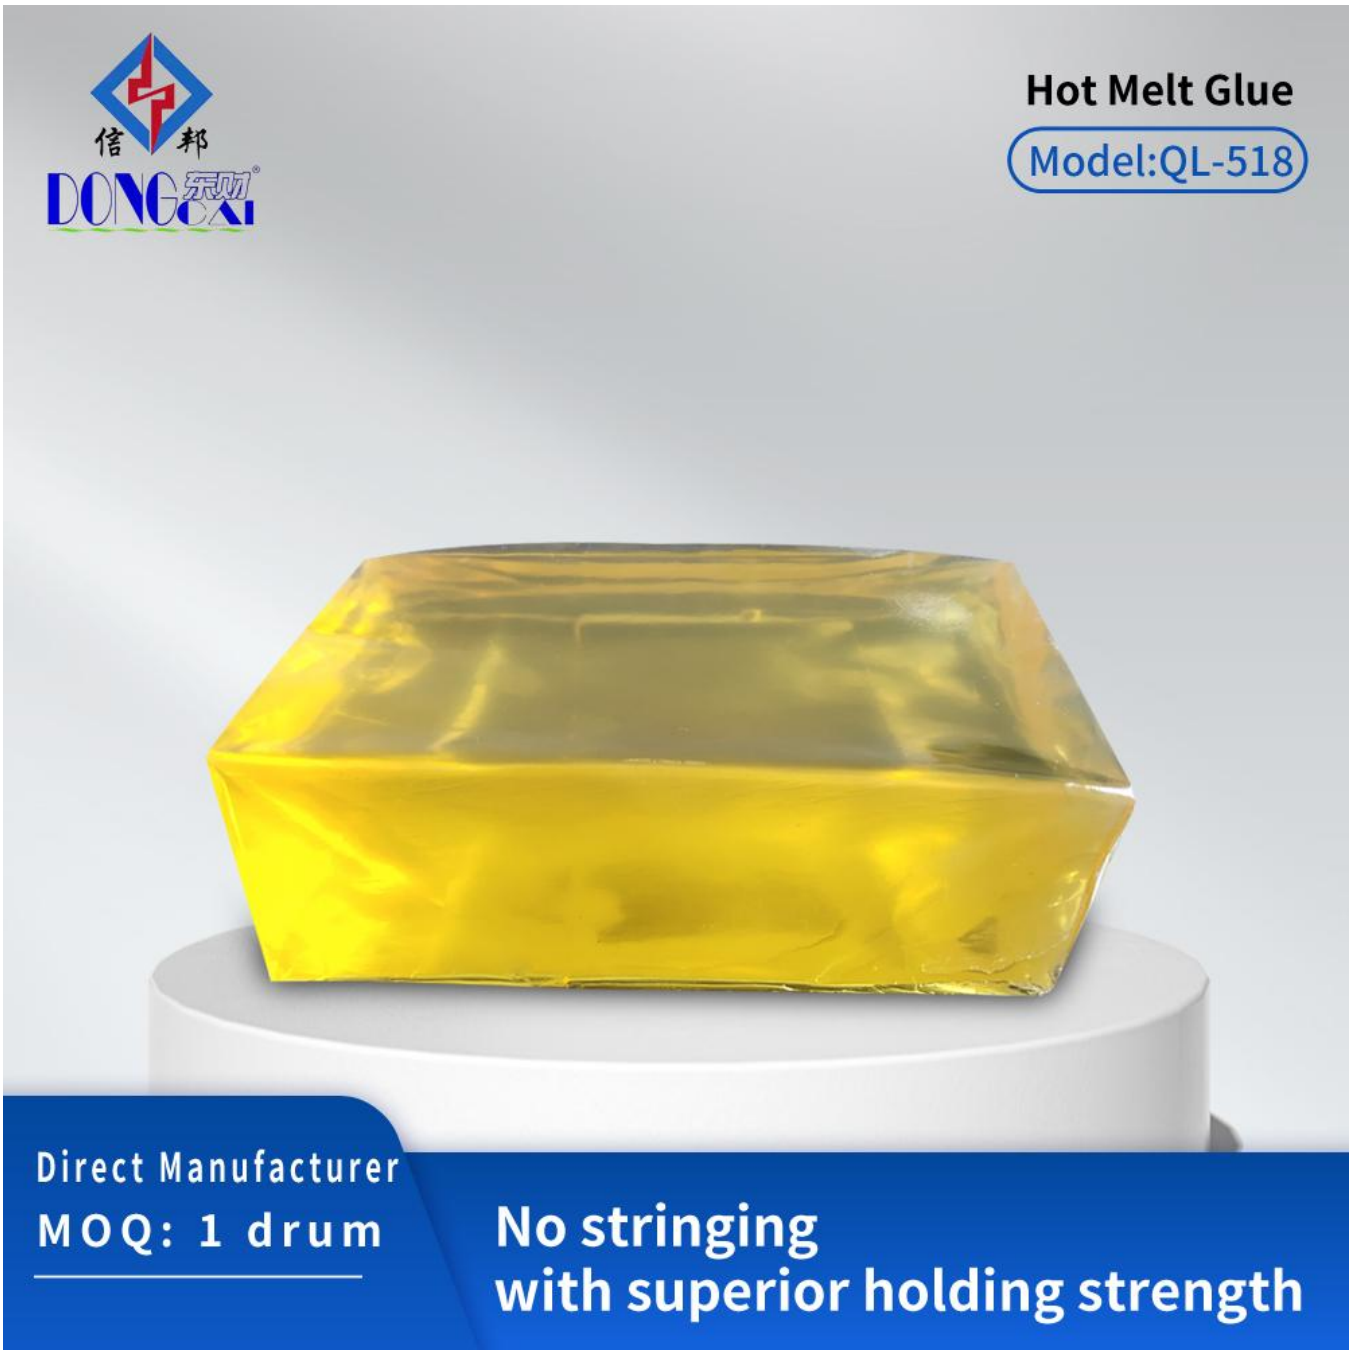

Product Features:

Strong bonding, high tensile strength.Good thermal stability, low odor.

Product Properties:

Appearance: Yellow transparent blocks.

Odor: Low.

Softening Point: 75-85°C.

Melt Viscosity: 1000-1600 mPa.s@180°C.

Open Time: 30-40 seconds.

Curing Time: 15-25 seconds.

Temperature Resistance: -5°C to 35°C.

Packing:

0.5KG/block, 20KG/carton

9. Pre-coated Film



Product Features:

High-speed operation, excellent transparency and gloss.

Uniform coating, enhanced color saturation, good abrasion resistance.

Product Properties:

Thickness: 12-50μm.

Width: 200-2300mm.

Length: 200-6000m.

Core Diameter: 25.4mm (1 inch) / 76mm (3 inch).

Applications:

Laminating paper, gold/silver card, plastic, ceramics.

More Videos, please click the following link to watch it.

https://www.youtube.com/@foldergluerадhesive

Thank you very much for your order and wish for a prosperous business

