Chapter 1
Introduction

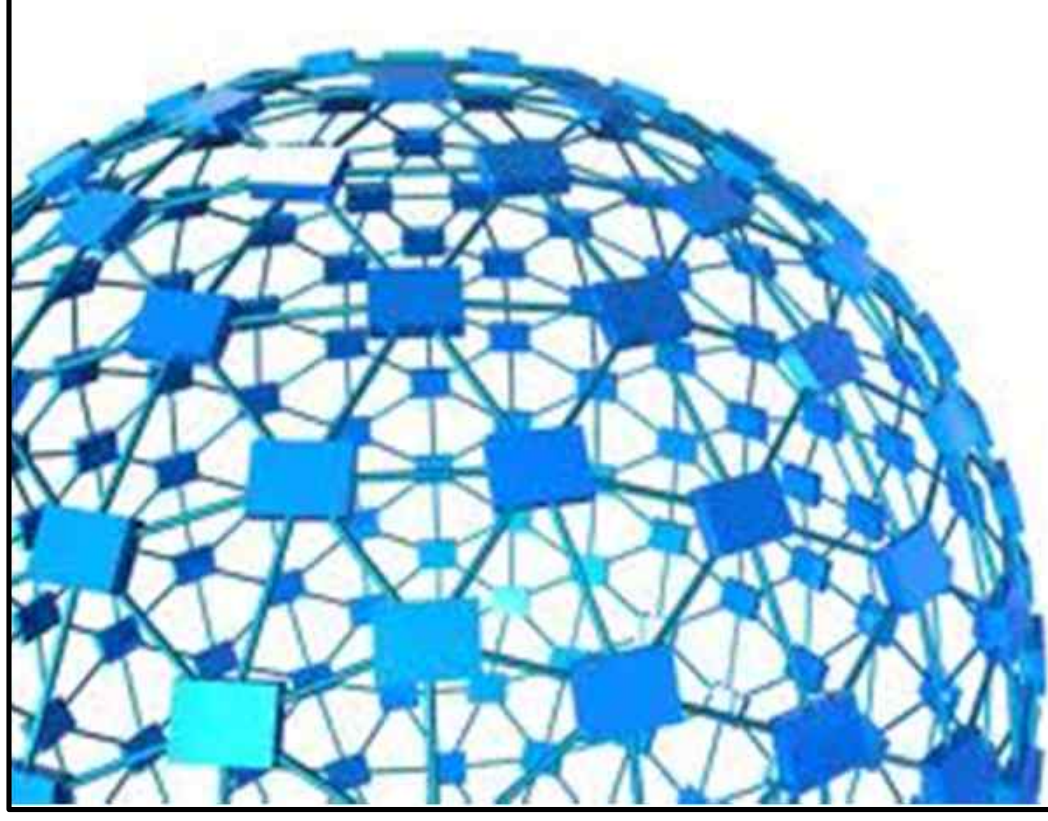

Chapter 1: Introduction

Our goal:
- get "feel" and terminology
- more depth, detail *later* in course
- approach:
  - use Internet as example
- Please read text book!!

Overview:
- what's the Internet?
- what's a protocol?
- network edge; hosts, access net, physical media
- network core: packet/circuit switching, Internet structure
- performance: loss, delay, throughput
- security
- protocol layers, service models
- history

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge
- end systems, access networks, links

1.3 Network core
- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks

1.5 Protocol layers, service models

1.6 Networks under attack: security

1.7 History

What's the Internet: "nuts and bolts" view

- millions of connected computing devices: *hosts = end systems*
  - running *network apps*
- *communication links*
  - fiber, copper, radio, satellite
  - transmission rate = *bandwidth*
- *routers:* forward packets (chunks of data)

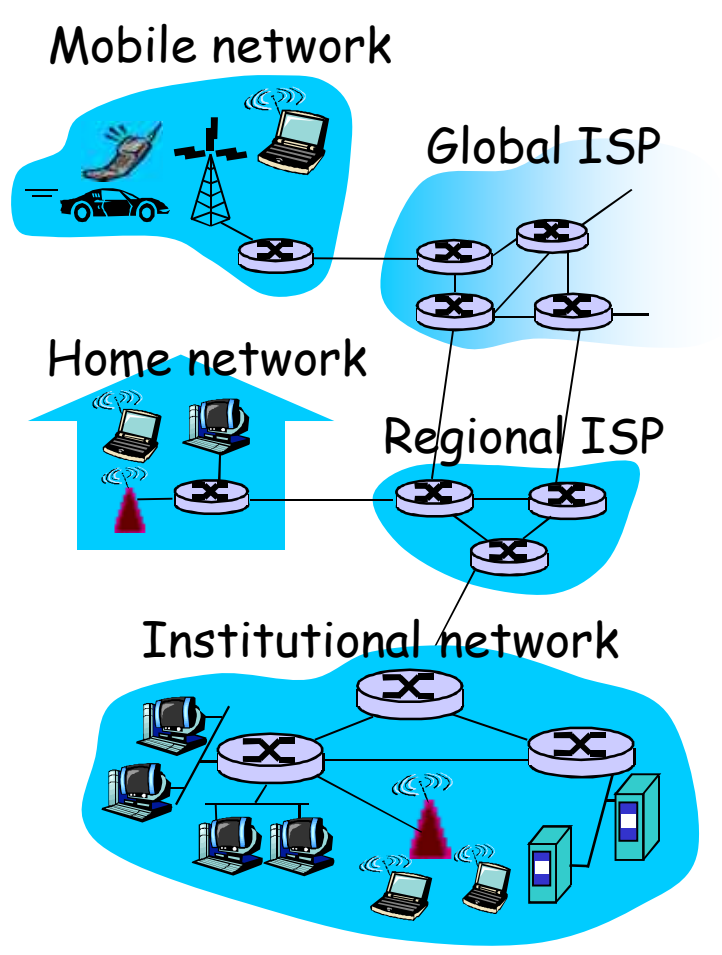

“Cool” internet appliances

IP picture frame
http://www.ceiva.com/

Web-enabled toaster +
weather forecaster

Tweet-a-watt:
monitor energy use

Smart phones

World’s smallest web server

Slingbox: watch,
control cable TV remotely

Internet phones

Internet
refrigerator

What’s the Internet: “nuts and bolts” view

- *protocols* control sending, receiving of msgs
  - e.g., TCP, IP, HTTP, Skype, 802.11
- *Internet:* “network of networks”
  - loosely hierarchical
  - public Internet versus private intranet
  - Interconnected ISPs
- Internet standards
  - RFC: Request for comments
  - IETF: Internet Engineering Task Force

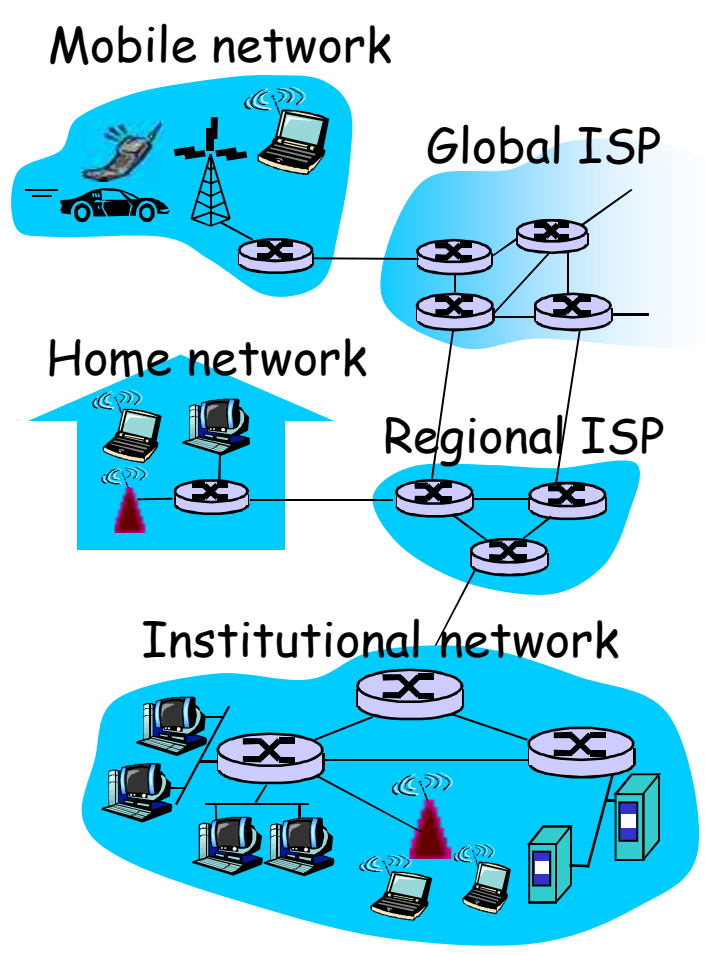

What's the Internet: a service view

- communication *infrastructure* enables distributed applications:
  - Web, VoIP, email, games, e-commerce, file sharing, social nets,
- communication services (programming interface) provided to apps:
  - hooks that allow sending and receiving app programs to "connect" to Internet
  - reliable data delivery from source to destination
  - "best effort" (unreliable) data delivery

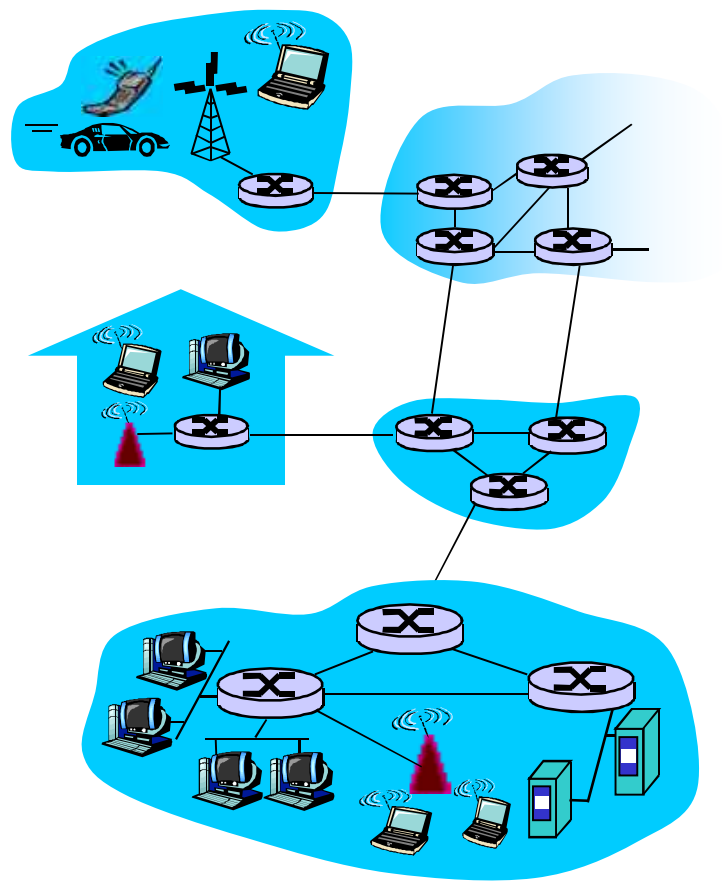

What's a protocol?

human protocols:

- "what's the time?"
- "I have a question"
- introductions

... specific msgs sent

... specific actions taken when msgs received, or other events

network protocols:

- machines rather than humans
- all communication activity in Internet governed by protocols

protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt

What's a protocol?

a human protocol and a computer network protocol:

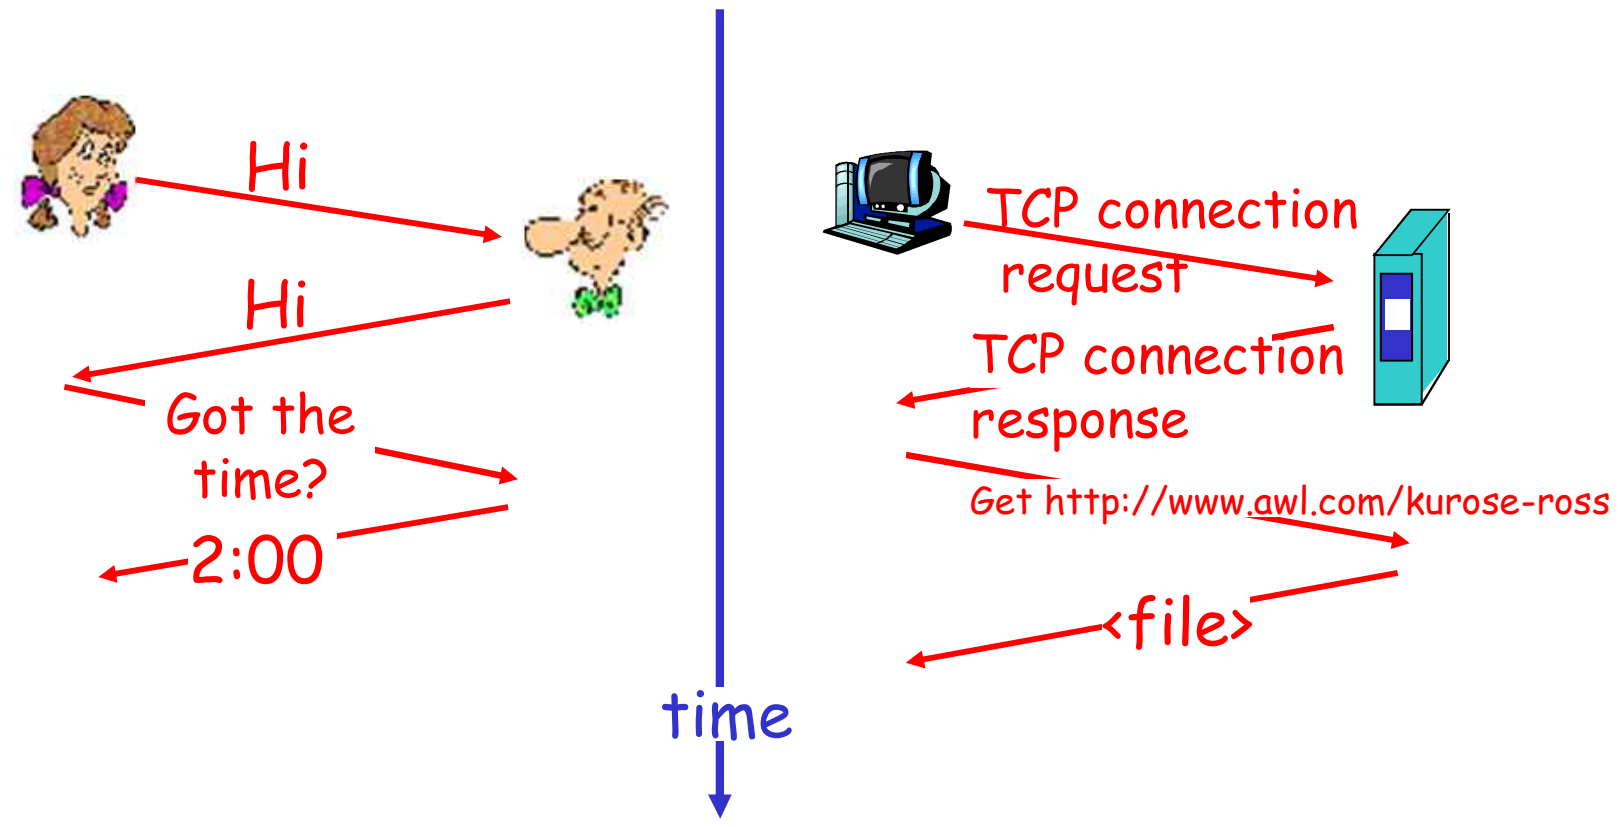

Q: Other human protocols?

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
- end systems, access networks, links

1.3 Network core
- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks
1.5 Protocol layers, service models
1.6 Networks under attack: security
1.7 History

A closer look at network structure:

- network edge:
  - applications and hosts
  - hosts: clients and servers
  - servers often in data centers
- access networks, physical media: wired, wireless communication links
- network core:
  - interconnected routers
  - network of networks

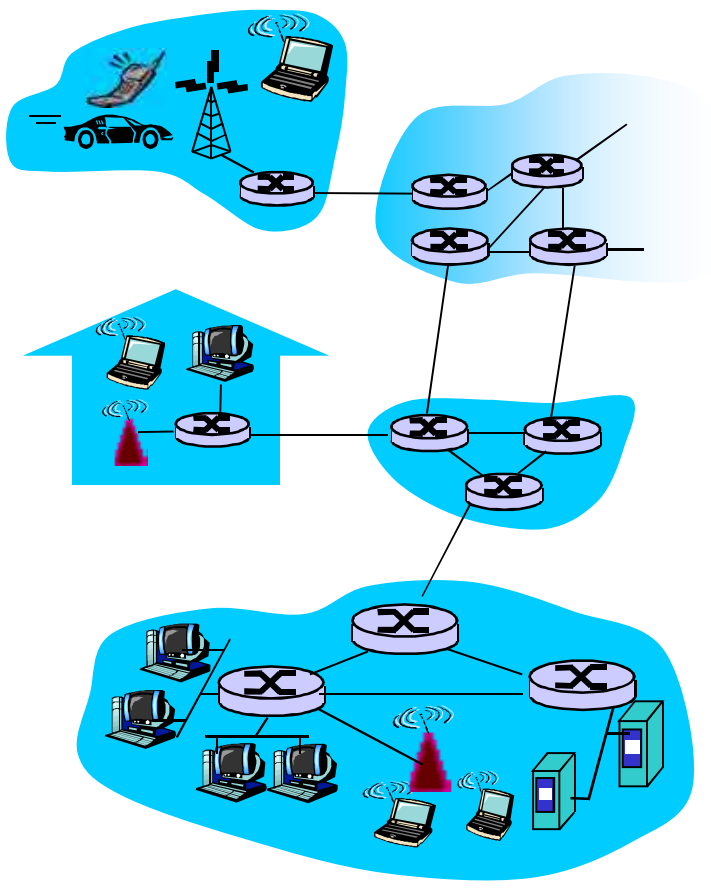

The network edge:

- end systems (hosts):
  - run application programs
  - e.g. Web, email
  - at "edge of network"
- client/server model
  - client host requests, receives service from always-on server
  - e.g. Web browser/server; email client/server
- peer-peer model:
  - minimal (or no) use of dedicated servers
  - e.g. Skype, BitTorrent

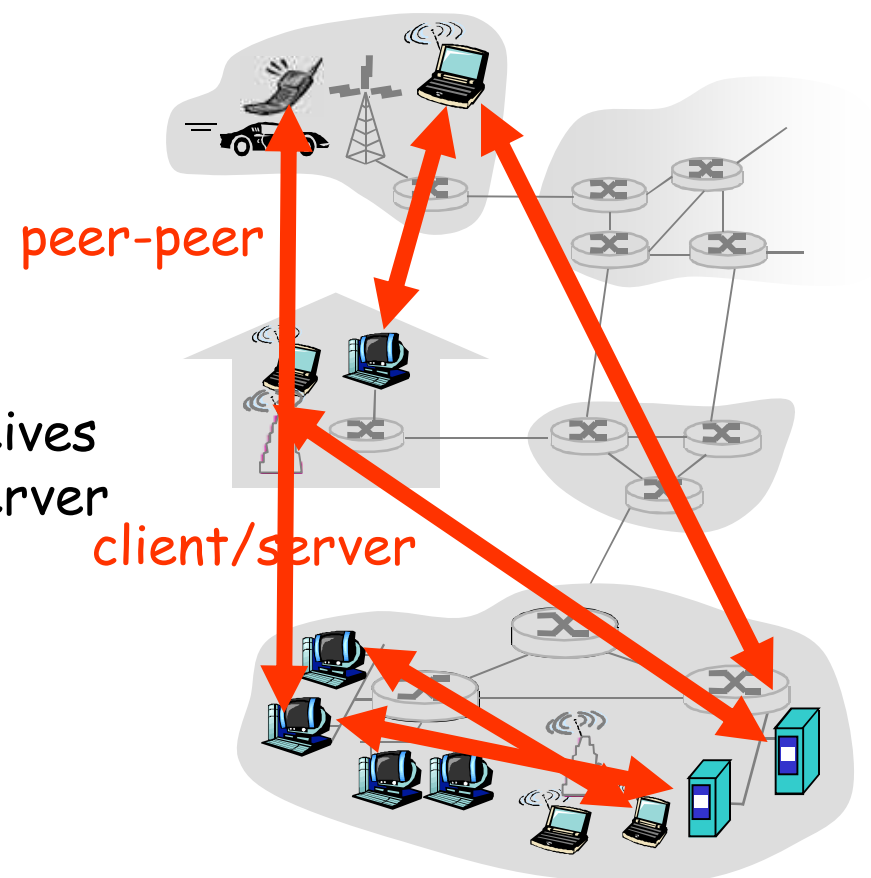

Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks

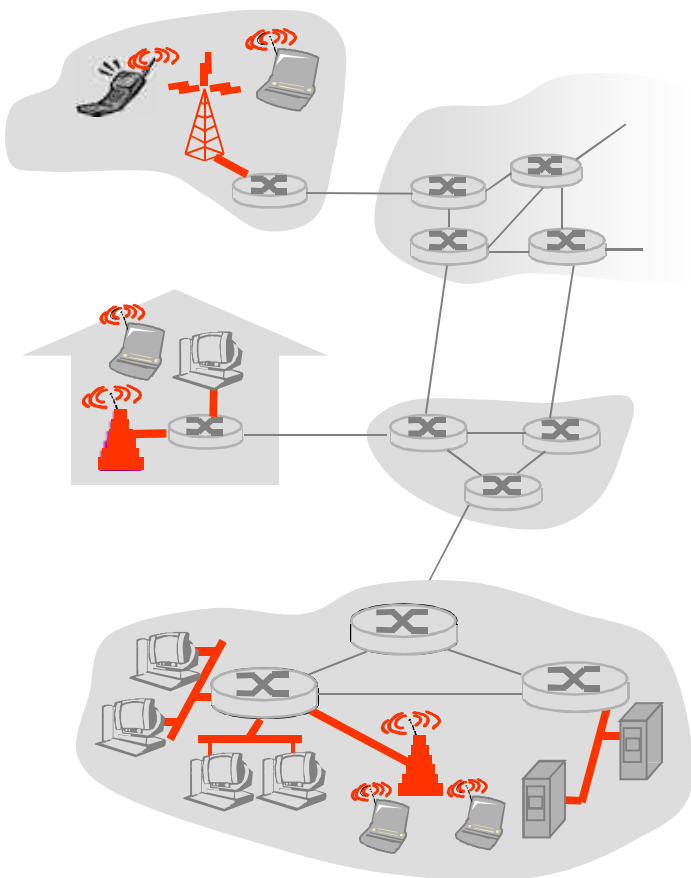

Keep in mind:

- bandwidth (bits per second) of access network?
- shared or dedicated?

Residential access: point to point access



- Dialup via modem
  - up to 56Kbps direct access to router (often less)
  - Can't surf and phone at same time: can't be "always on"
- DSL: digital subscriber line
  - deployment: telephone company (typically)
  - use existing telephone line to central office DSLAM
  - up to 2.5 Mbps upstream (today typically < 1 Mbps)
  - up to 24 Mbps downstream (today typically < 10 Mbps)
  - dedicated physical line to telephone central office

Residential access: point-to-point access

- DSL

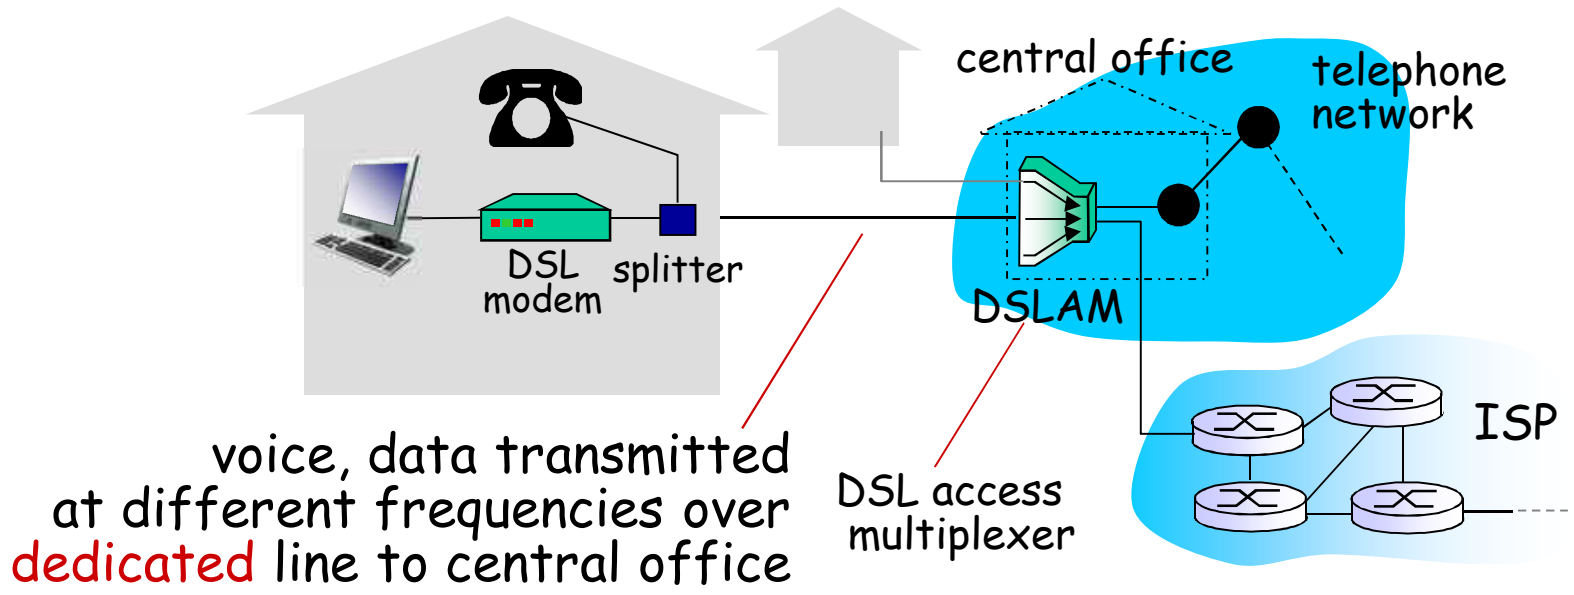

Residential access: cable modems

- HFC: hybrid fiber coax
  - asymmetric: up to 30Mbps downstream, 2 Mbps upstream transmission rate
- network of cable and fiber attaches homes to ISP router
  - homes share access to cable headend
  - unlike DSL, which has dedicated access to central office
- deployment: available via cable TV companies

Residential access: cable modems

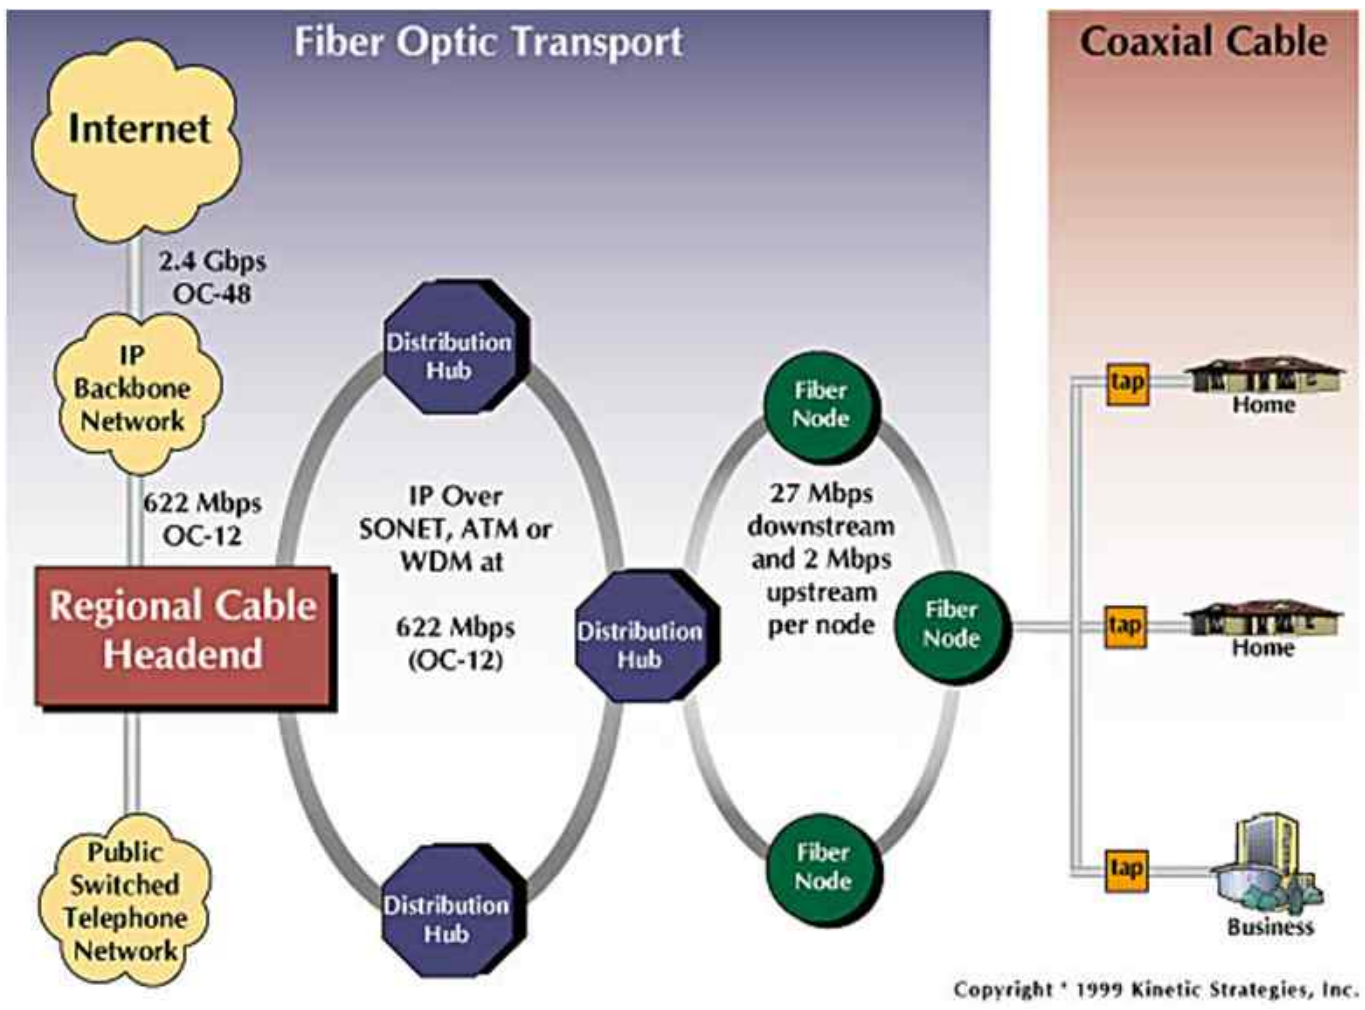

Diagram: http://www.cabledatacomnews.com/cmic/diagram.html

Cable Network Architecture: Overview

Typically 500 to 5,000 homes

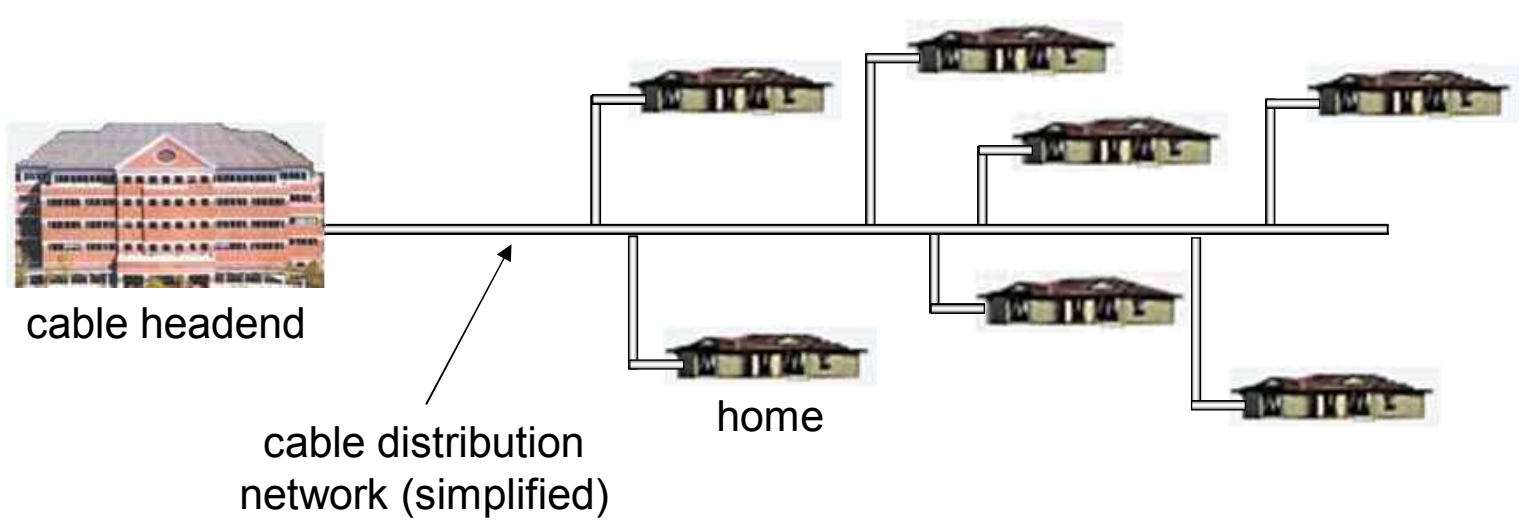

Cable Network Architecture: Overview

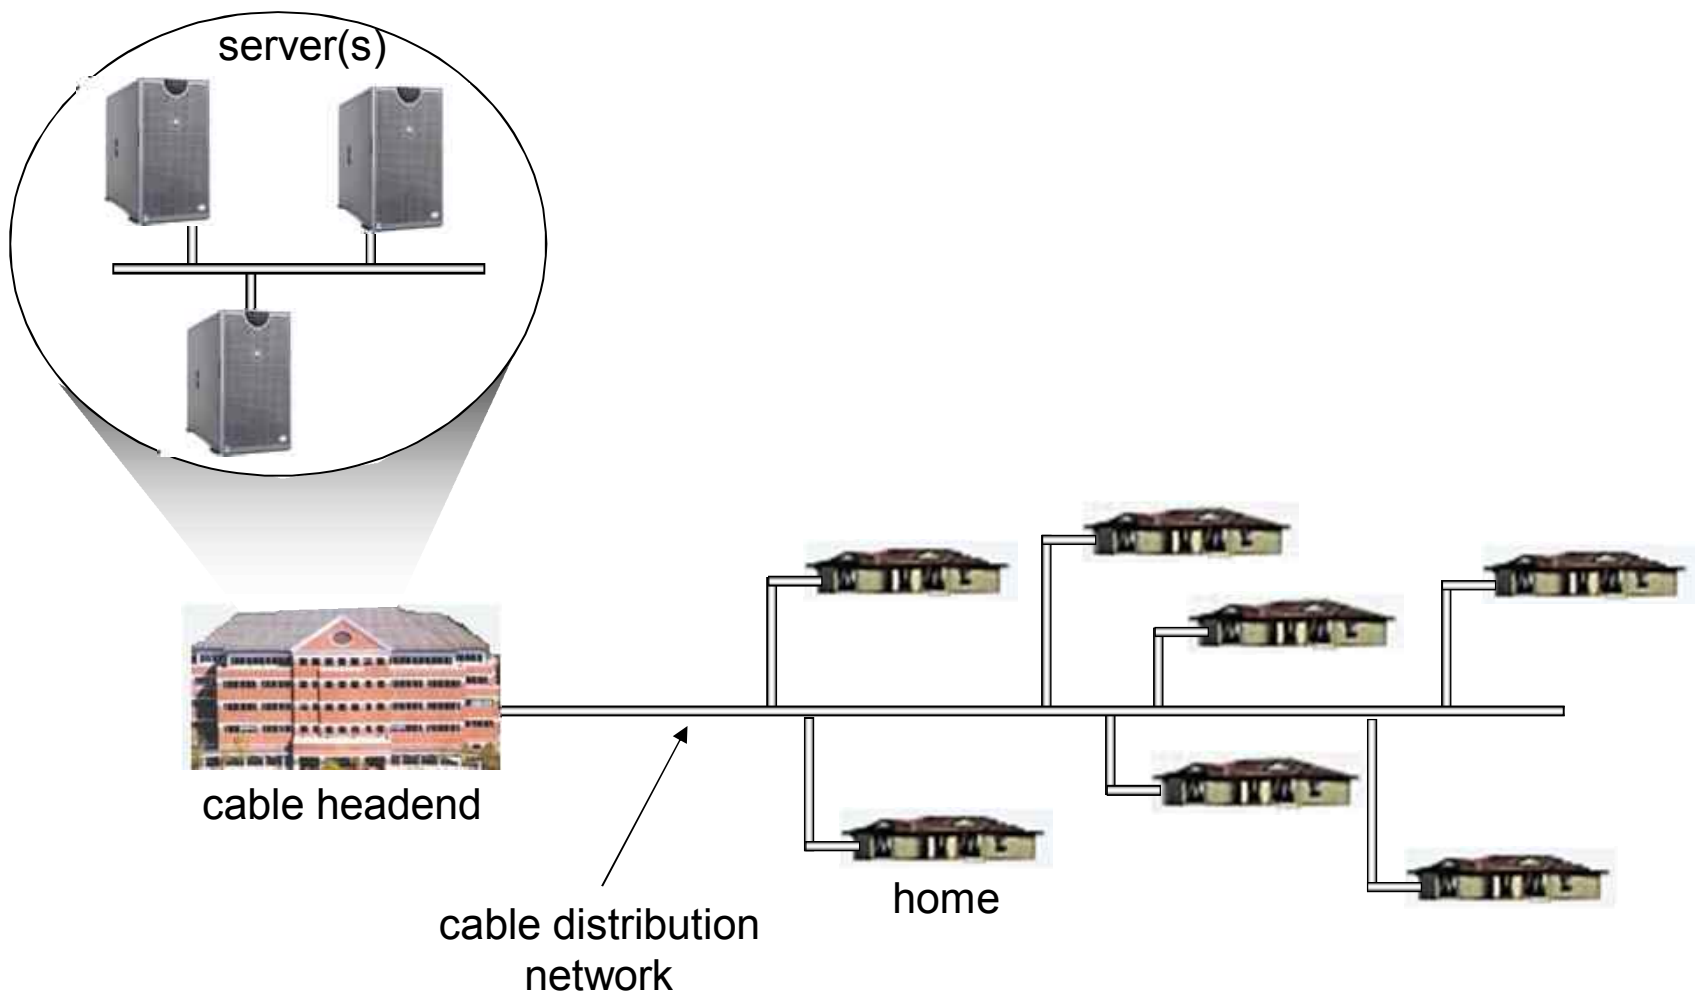

Cable Network Architecture: Overview

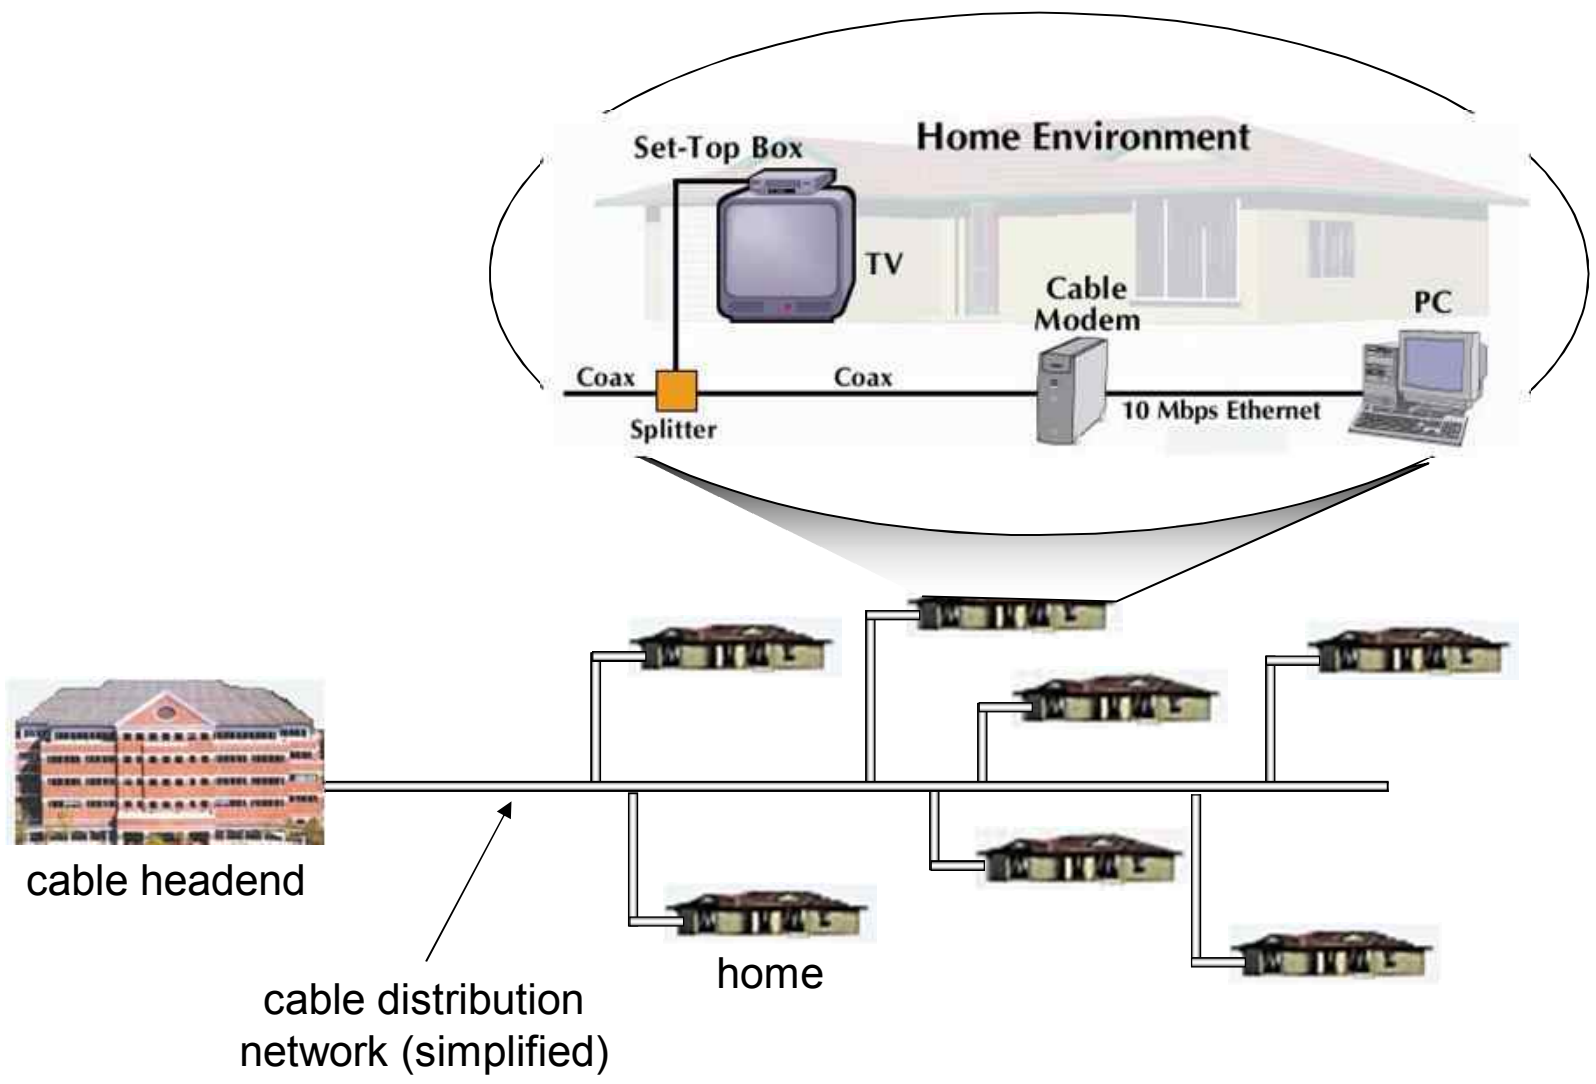

Cable Network Architecture: Overview

FDM (more shortly):

frequency division multiplexing:
different channels transmitted in different frequency bands

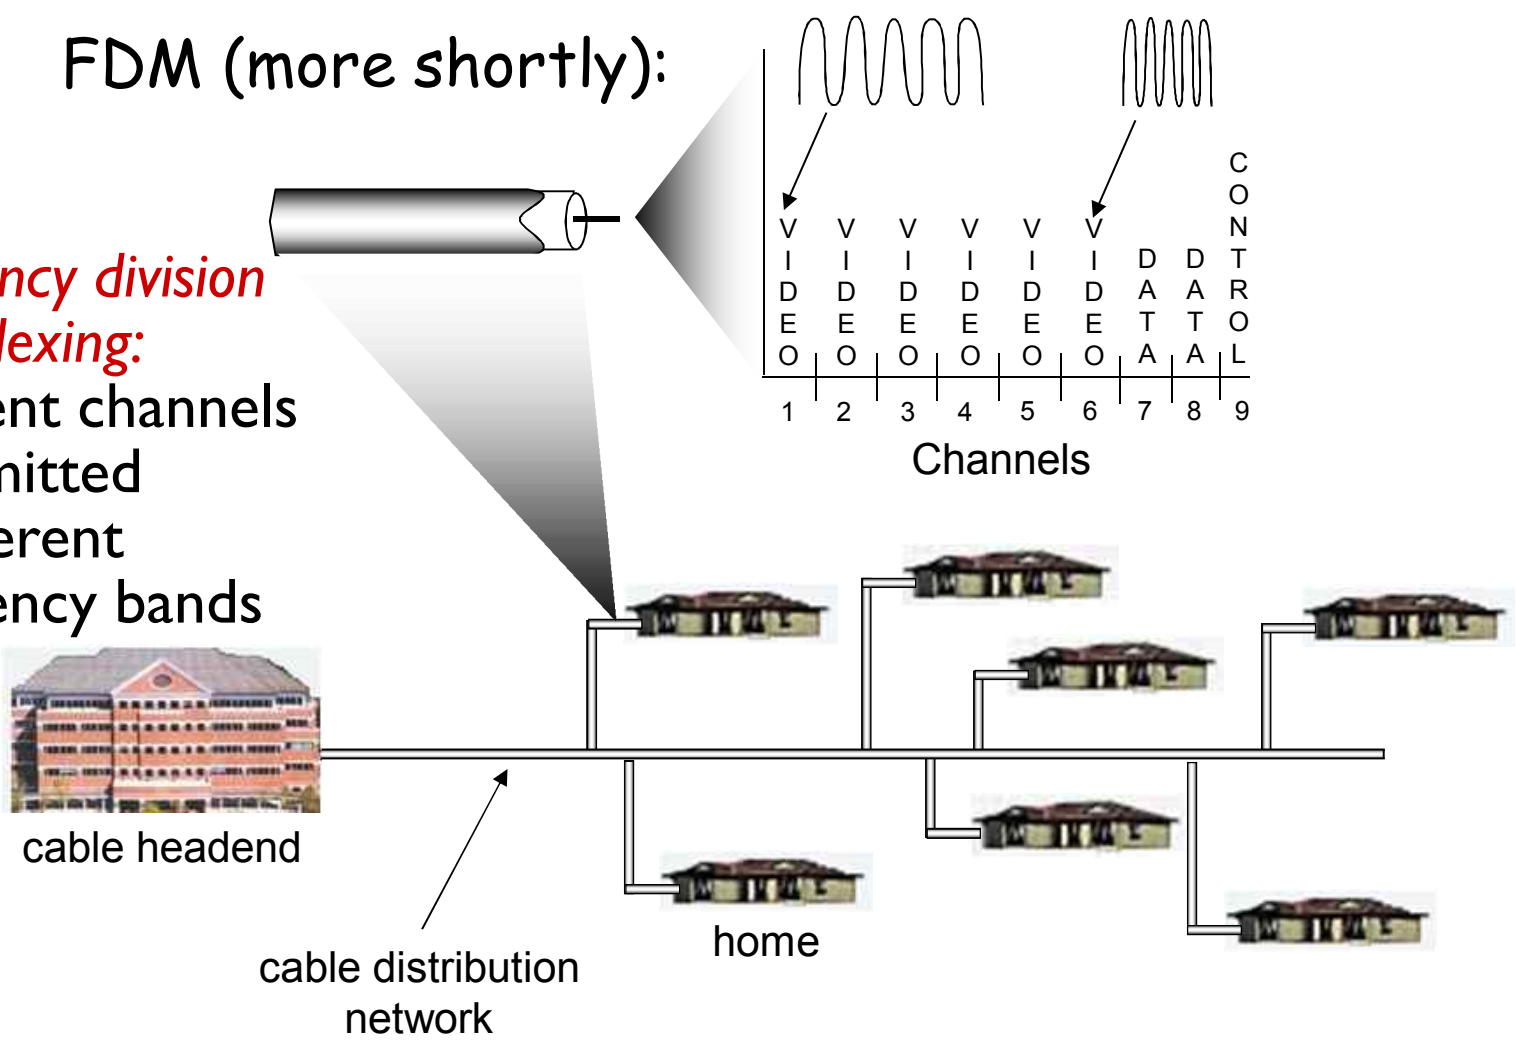

Enterprise access: local area networks

- company/univ local area network (LAN) connects end system to edge router
- Ethernet:
  - 10 Mbps, 100Mbps, 1Gbps, 10Gbps transmission rates
  - modern configuration: end systems connect into *Ethernet switch*

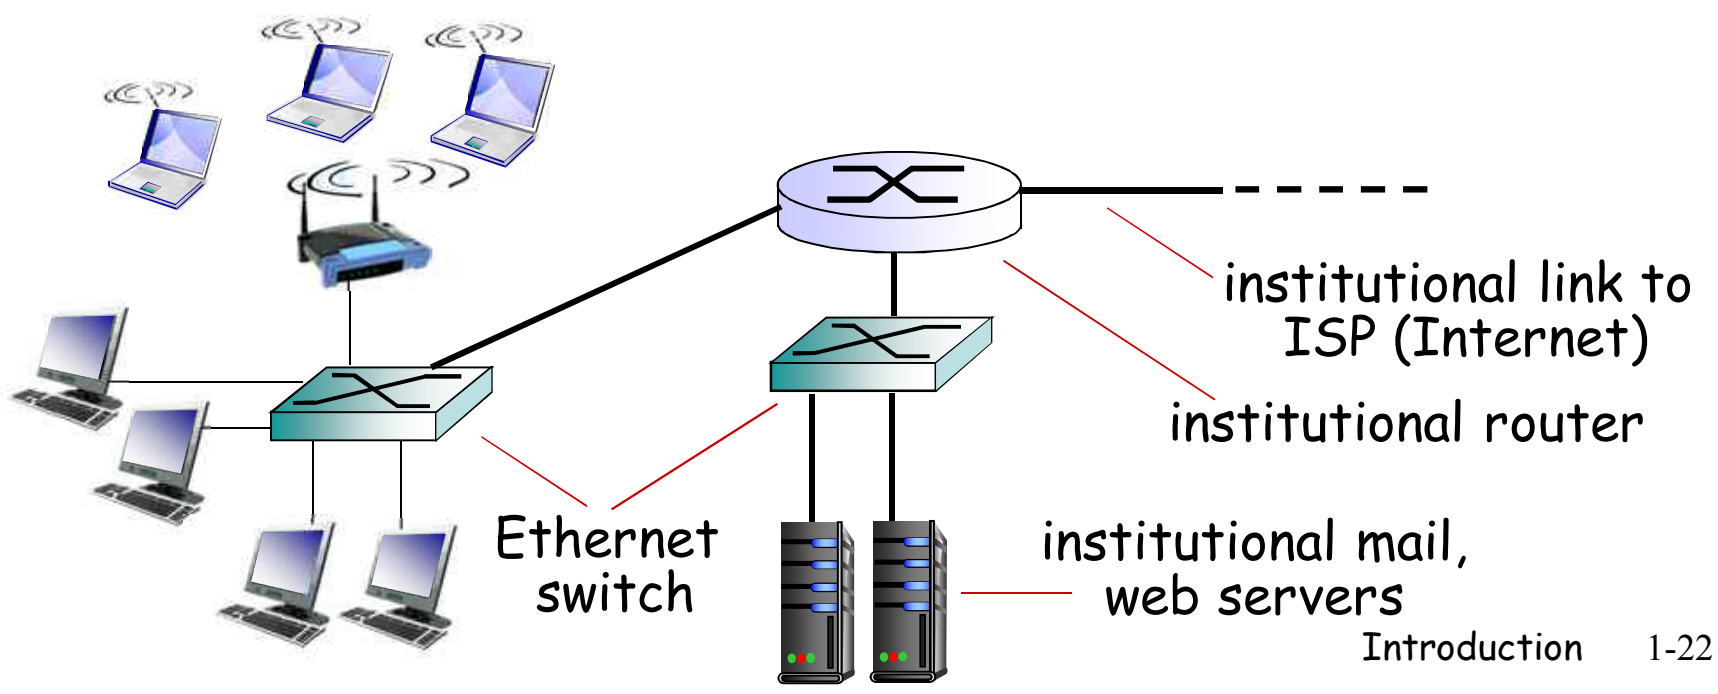

Wireless access networks

- shared *wireless* access network connects end system to router
  - via base station aka "access point"
- wireless LANs:
  - Within building(100ft)
  - 802.11b/g (WiFi): 11 or 54 Mbps
- wider-area wireless access
  - provided by telco operator, 10's km
  - 1~10 Mbps over cellular system (EVDO, HSDPA, 3G, 4G:LTE, 5G)
  - WiMAX or WiBro (10's Mbps)



Home network

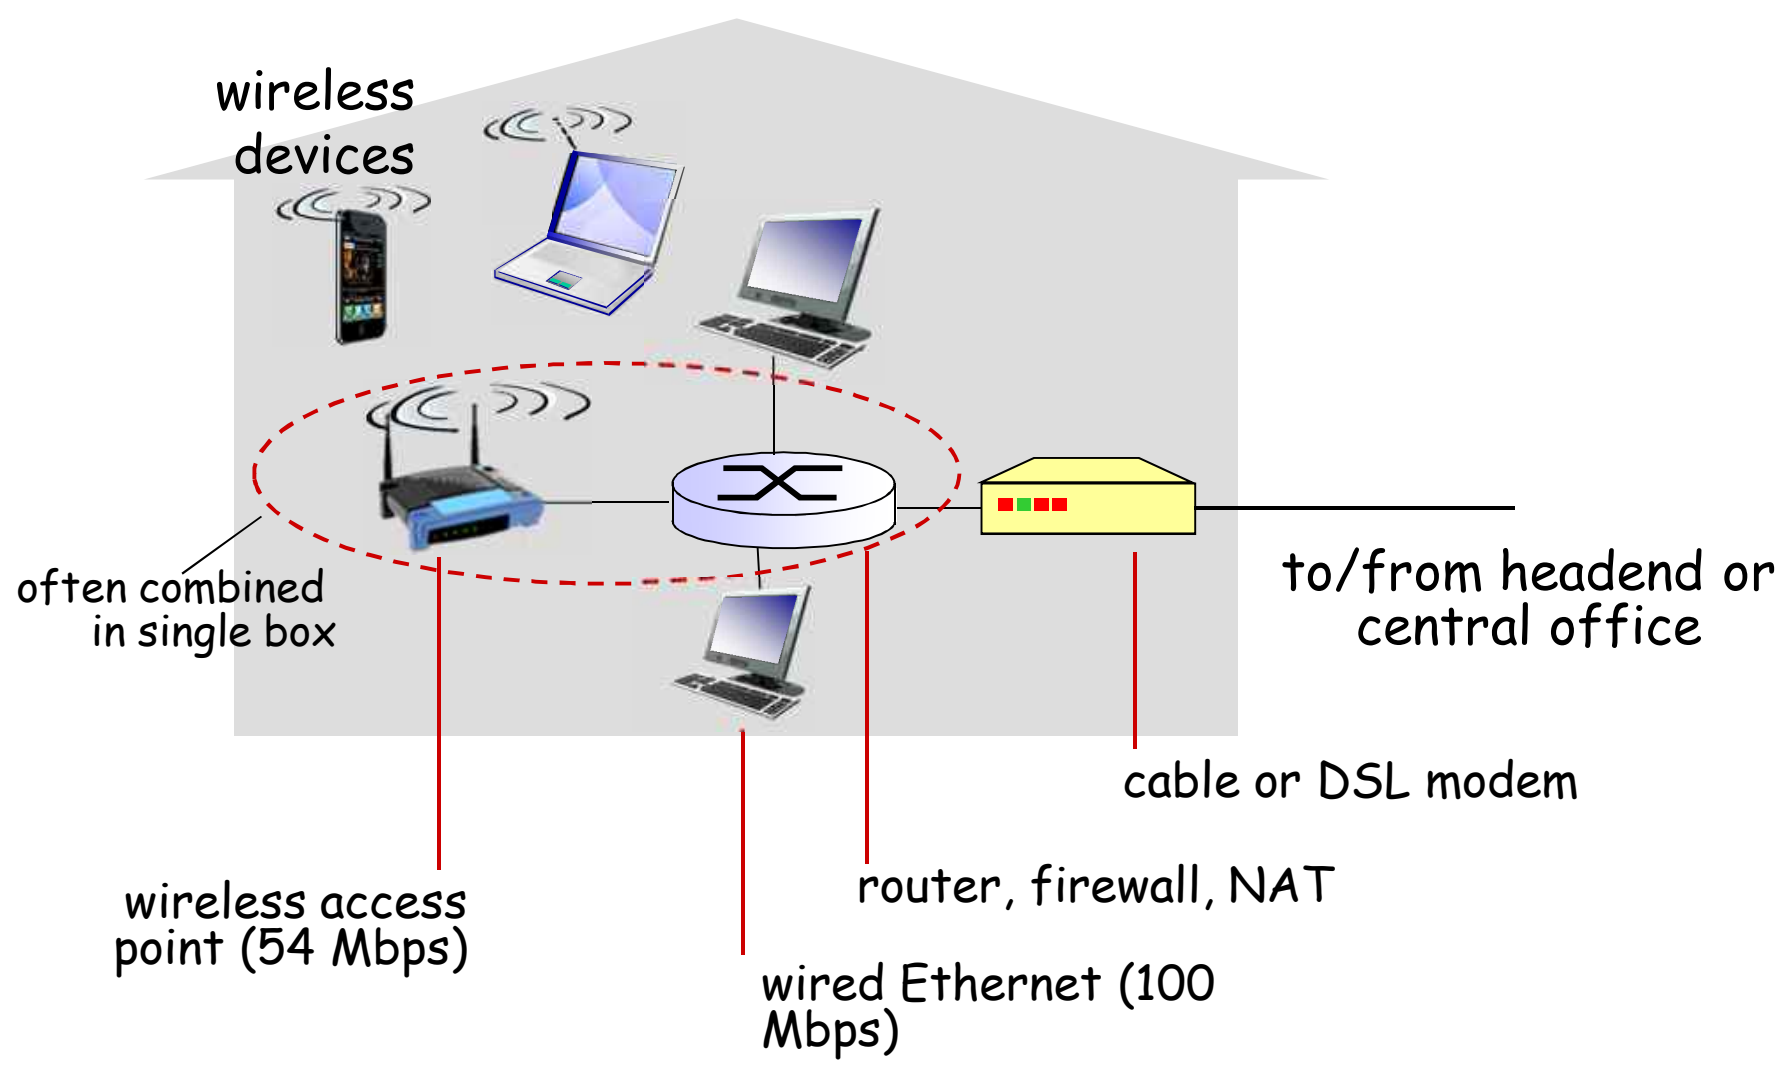

Host: sends *packets* of data

- host sending function:
  - takes application message
  - breaks into smaller chunks, known as *packets*, of length *L* bits
  - transmits packet into access network at *transmission rate R*
    - link transmission rate, aka link *capacity, aka link bandwidth*

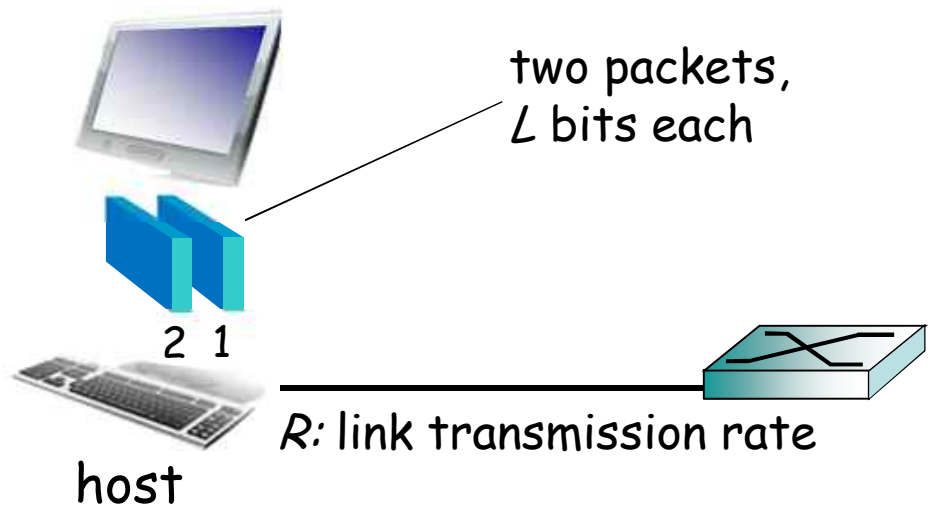

$$\text{packet transmission delay} = \text{time needed to transmit } L\text{-bit packet into link} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

Introduction 1-25

Physical Media

- bit: propagates between transmitter/receiver pairs
- physical link: what lies between transmitter & receiver
- guided media:
  - signals propagate in solid media: copper, fiber, coax
- unguided media:
  - signals propagate freely, e.g., radio

Twisted Pair (TP)

- two insulated copper wires
  - Category 3: traditional phone wires, 10 Mbps Ethernet
  - Category 5: 100Mbps Ethernet
  - Category 6: 10Gbps

Introduction 1-26

Physical Media: coax, fiber

Coaxial cable:
- two concentric copper conductors
- bidirectional
- baseband:
  - single channel on cable
  - legacy Ethernet
- broadband:
  - multiple channels on cable
  - HFC

Fiber optic cable:
- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (e.g., 10's-100's Gps)
- low error rate: repeaters spaced far apart; immune to electromagnetic noise

Physical Media: coax, fiber

coax

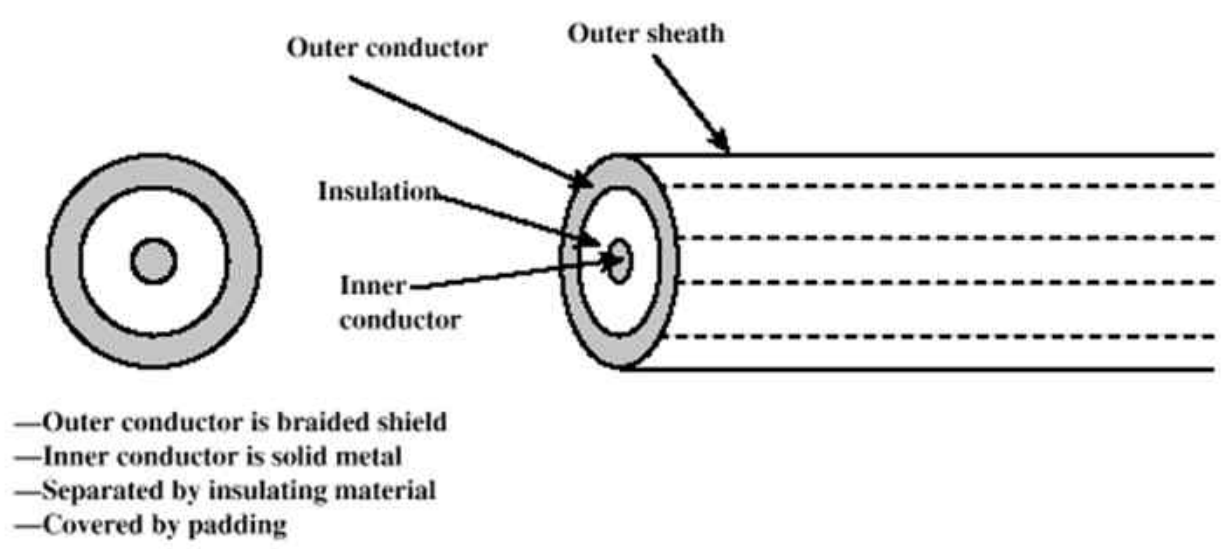

fiber

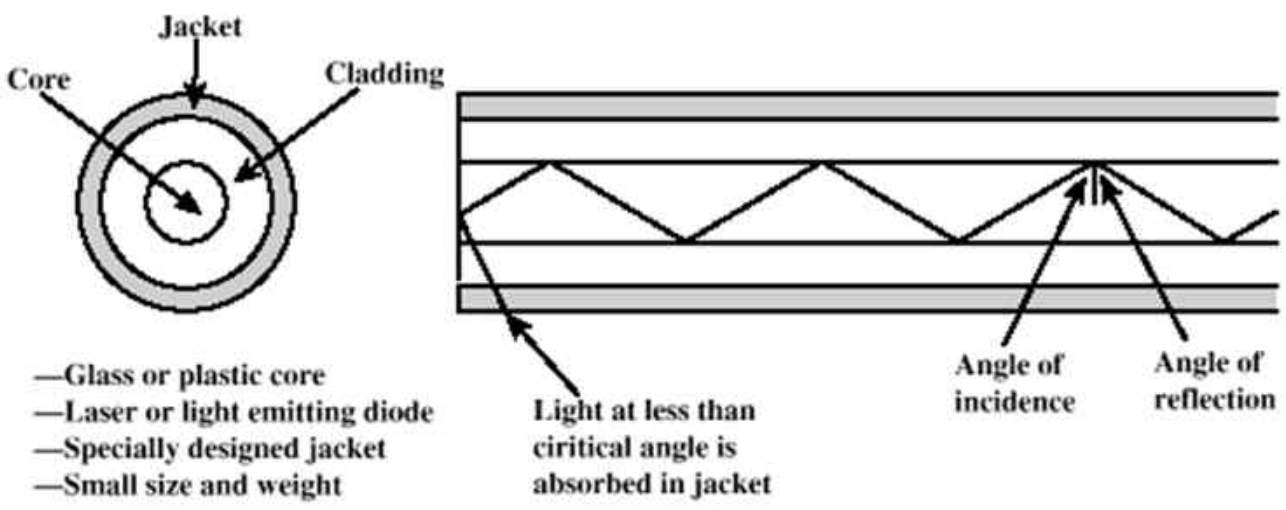

Physical media: radio

- signal carried in electromagnetic spectrum
- no physical "wire"
- bidirectional
- propagation environment effects:
  - reflection
  - obstruction by objects
  - interference

Radio link types:

- terrestrial microwave
  - e.g. up to 45 Mbps channels
- LAN (e.g., Wifi)
  - 11 Mbps, 54 Mbps
- wide-area (e.g., cellular)
  - 3G cellular: ~ few Mbps
- satellite
  - Kbps to 45Mbps channel (or multiple smaller channels)
  - 270 msec end-end delay
  - geosynchronous versus low altitude

Physical Media : Spectrum

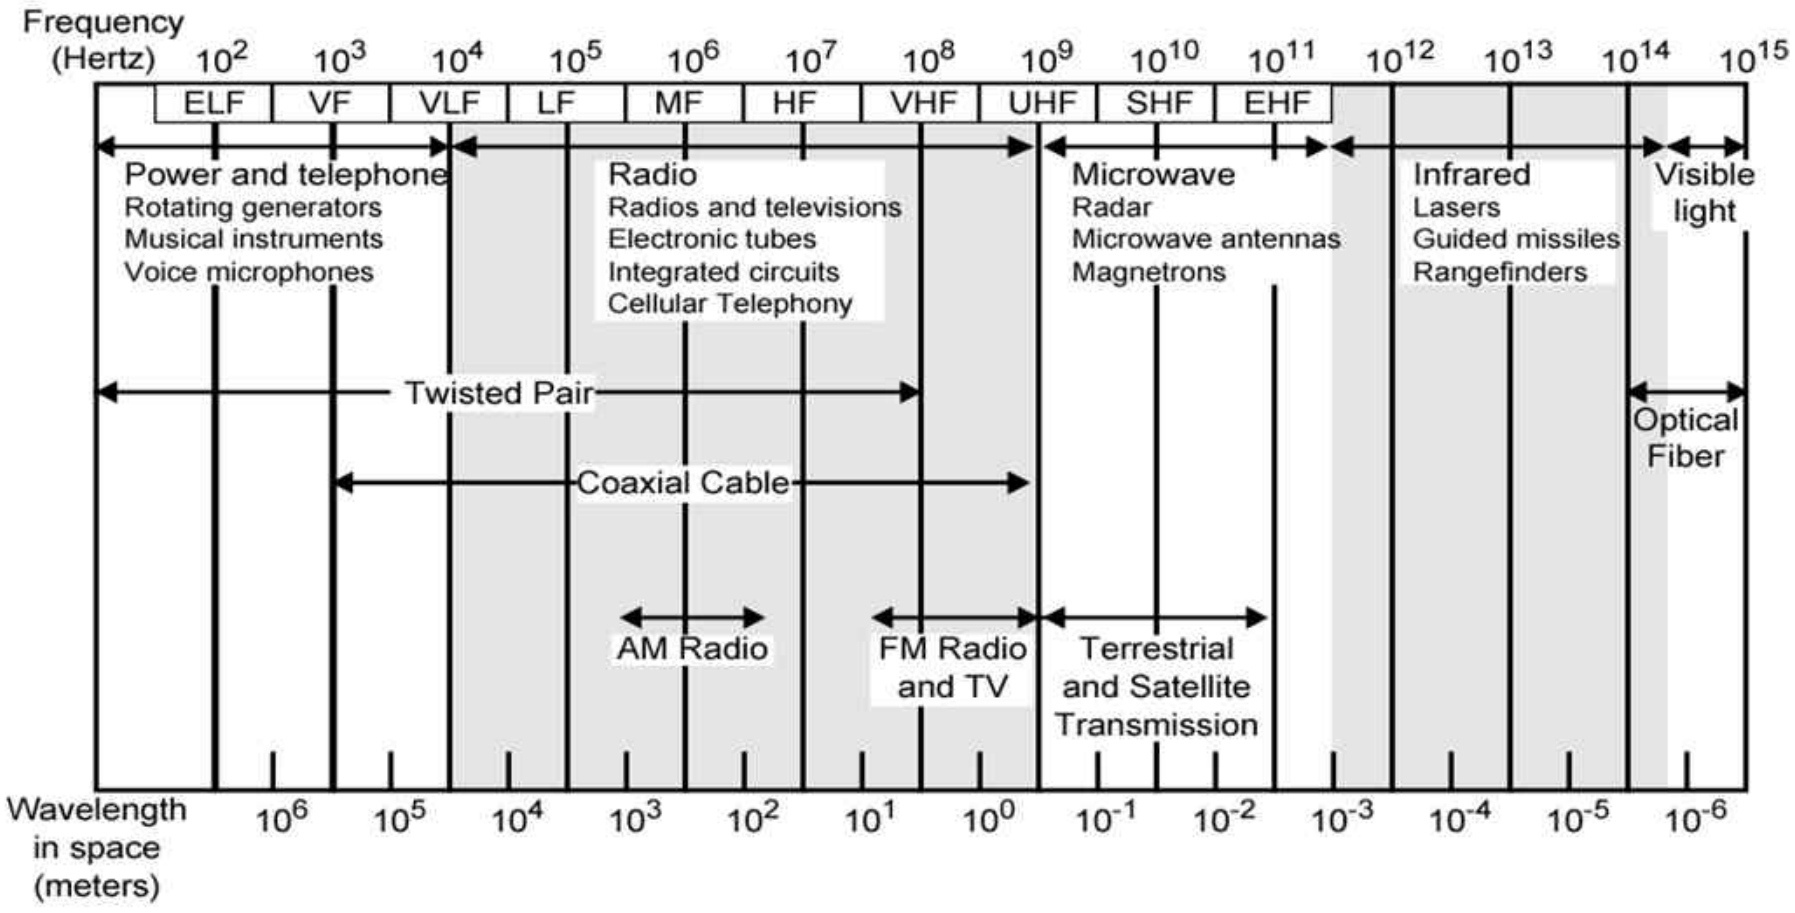

ELF = Extremely low frequency
VF = Voice frequency
VLF = Very low frequency
LF = Low frequency
MF = Medium frequency
HF = High frequency
VHF = Very high frequency
UHF = Ultrahigh frequency
SHF = Superhigh frequency
EHF = Extremely high frequency

Encoding

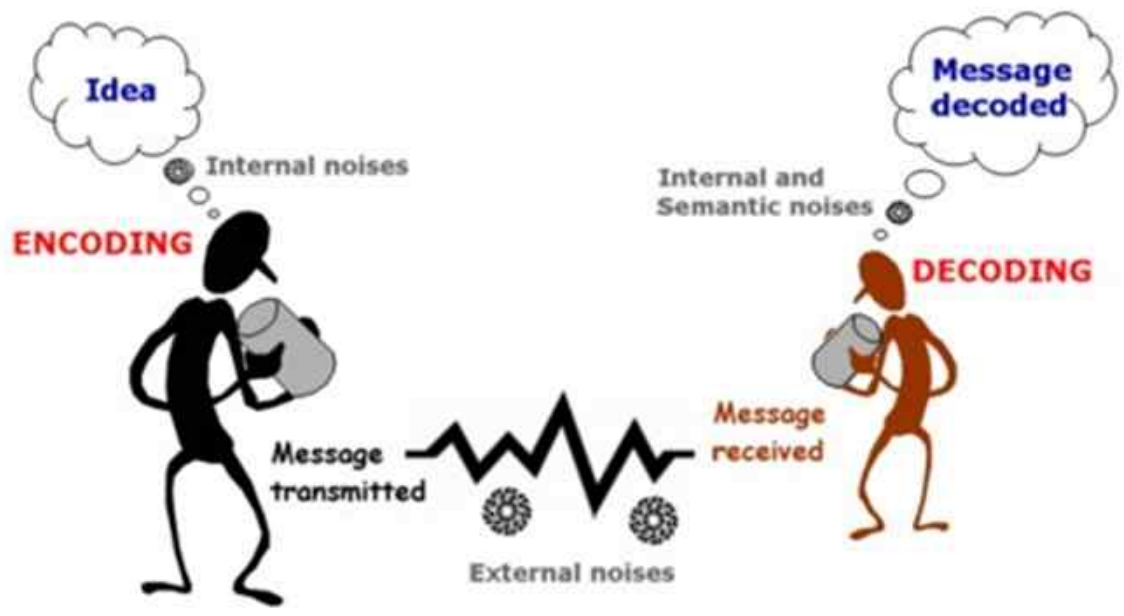

Manchester Encoding

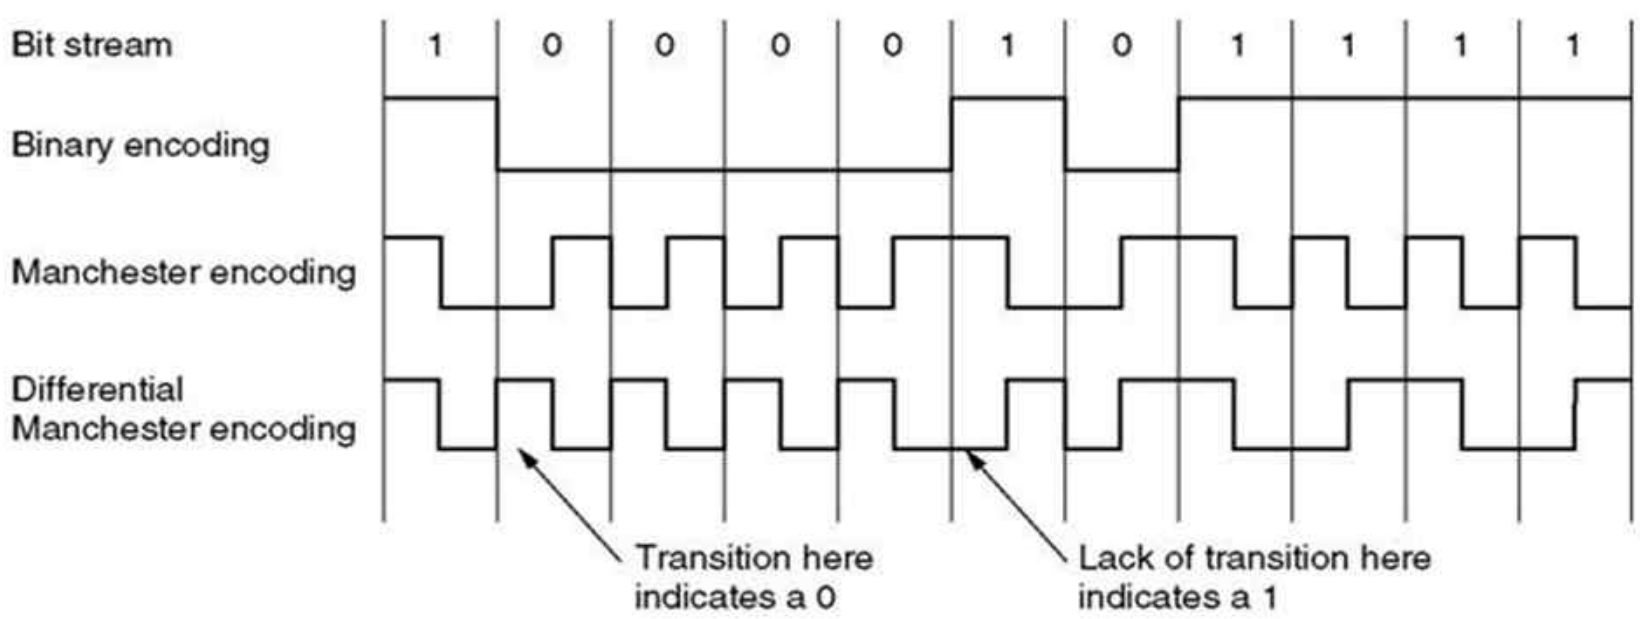

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
- end systems, access networks, links

1.3 Network core
- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks
1.5 Protocol layers, service models
1.6 Networks under attack: security
1.7 History

The Network Core

- mesh of interconnected routers
- *the* fundamental question: how is data transferred through net?
  - circuit switching: dedicated circuit per call: telephone net
  - packet-switching: data sent thru net in discrete "chunks"

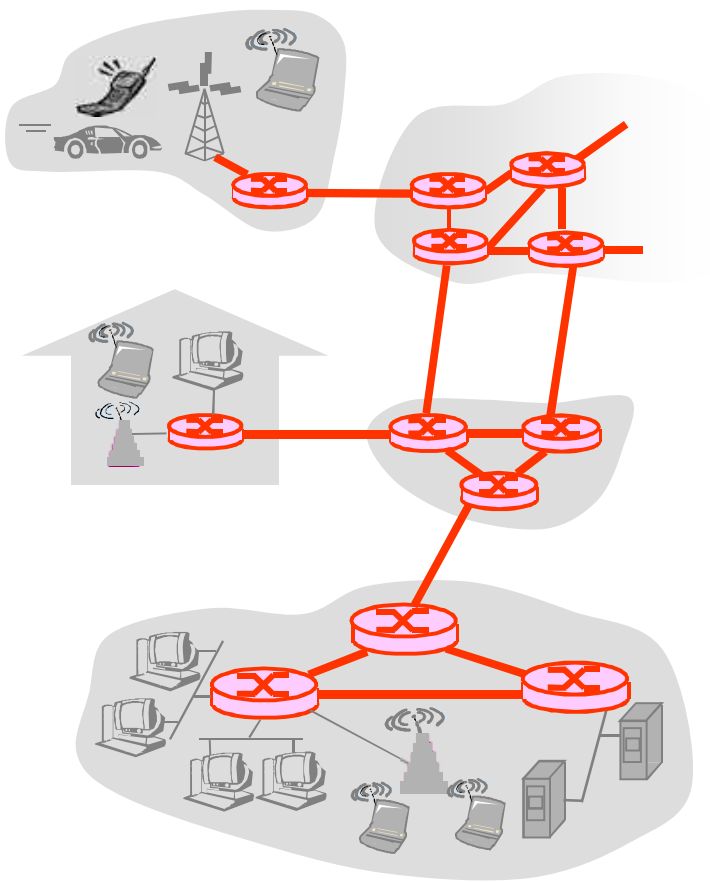

Network Core: Circuit Switching

End-end resources reserved for "call" between source & destination

- link bandwidth, switch capacity
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- call setup required
- Commonly used in traditional telephone networks

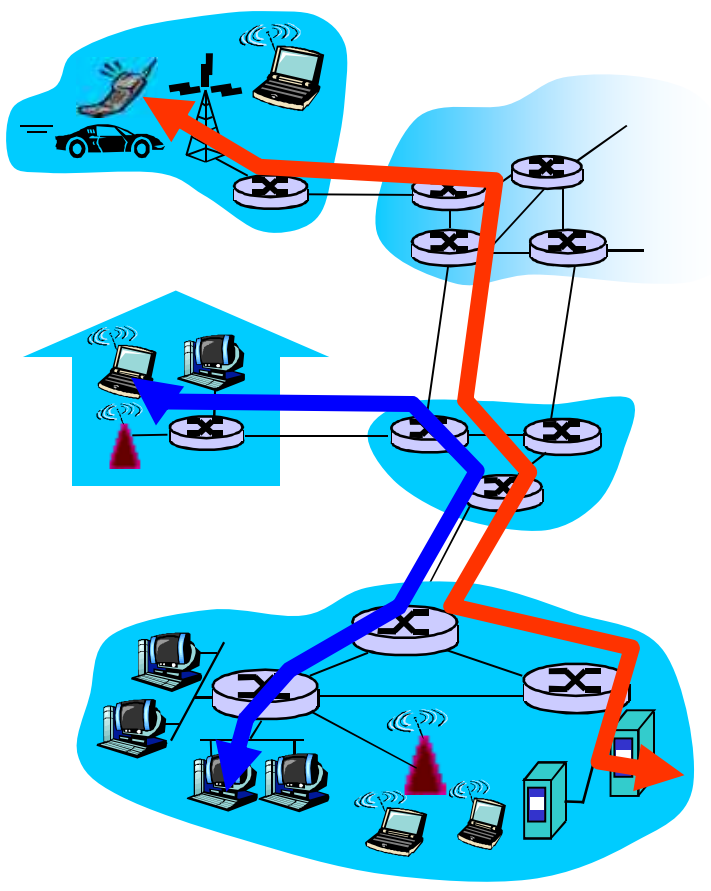

Network Core: Circuit Switching

network resources (e.g., bandwidth) divided into "pieces"

- pieces allocated to calls
- resource piece *idle* if not used by owning call *(no sharing)*

- dividing link bandwidth into "pieces"
  - frequency division
  - time division

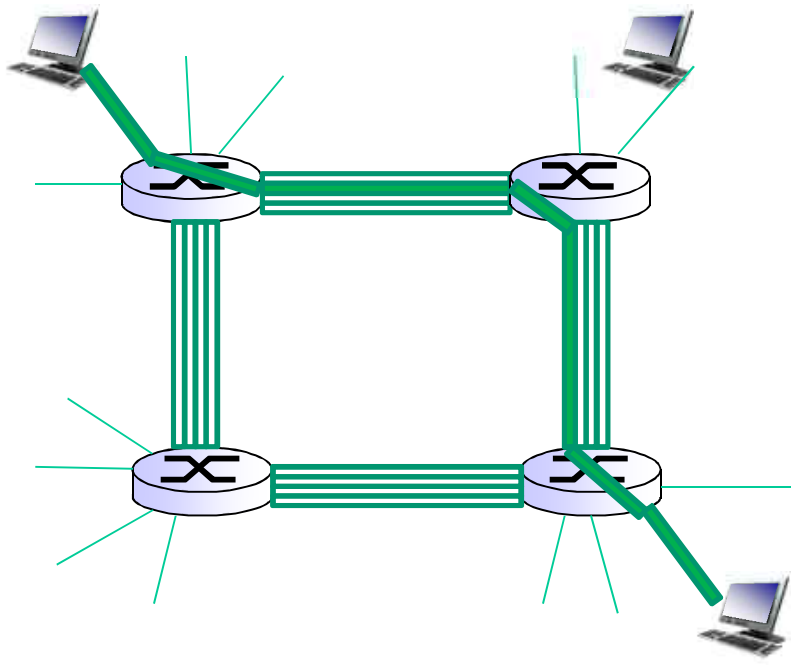

Circuit Switching: FDM and TDM

Example:

4 users

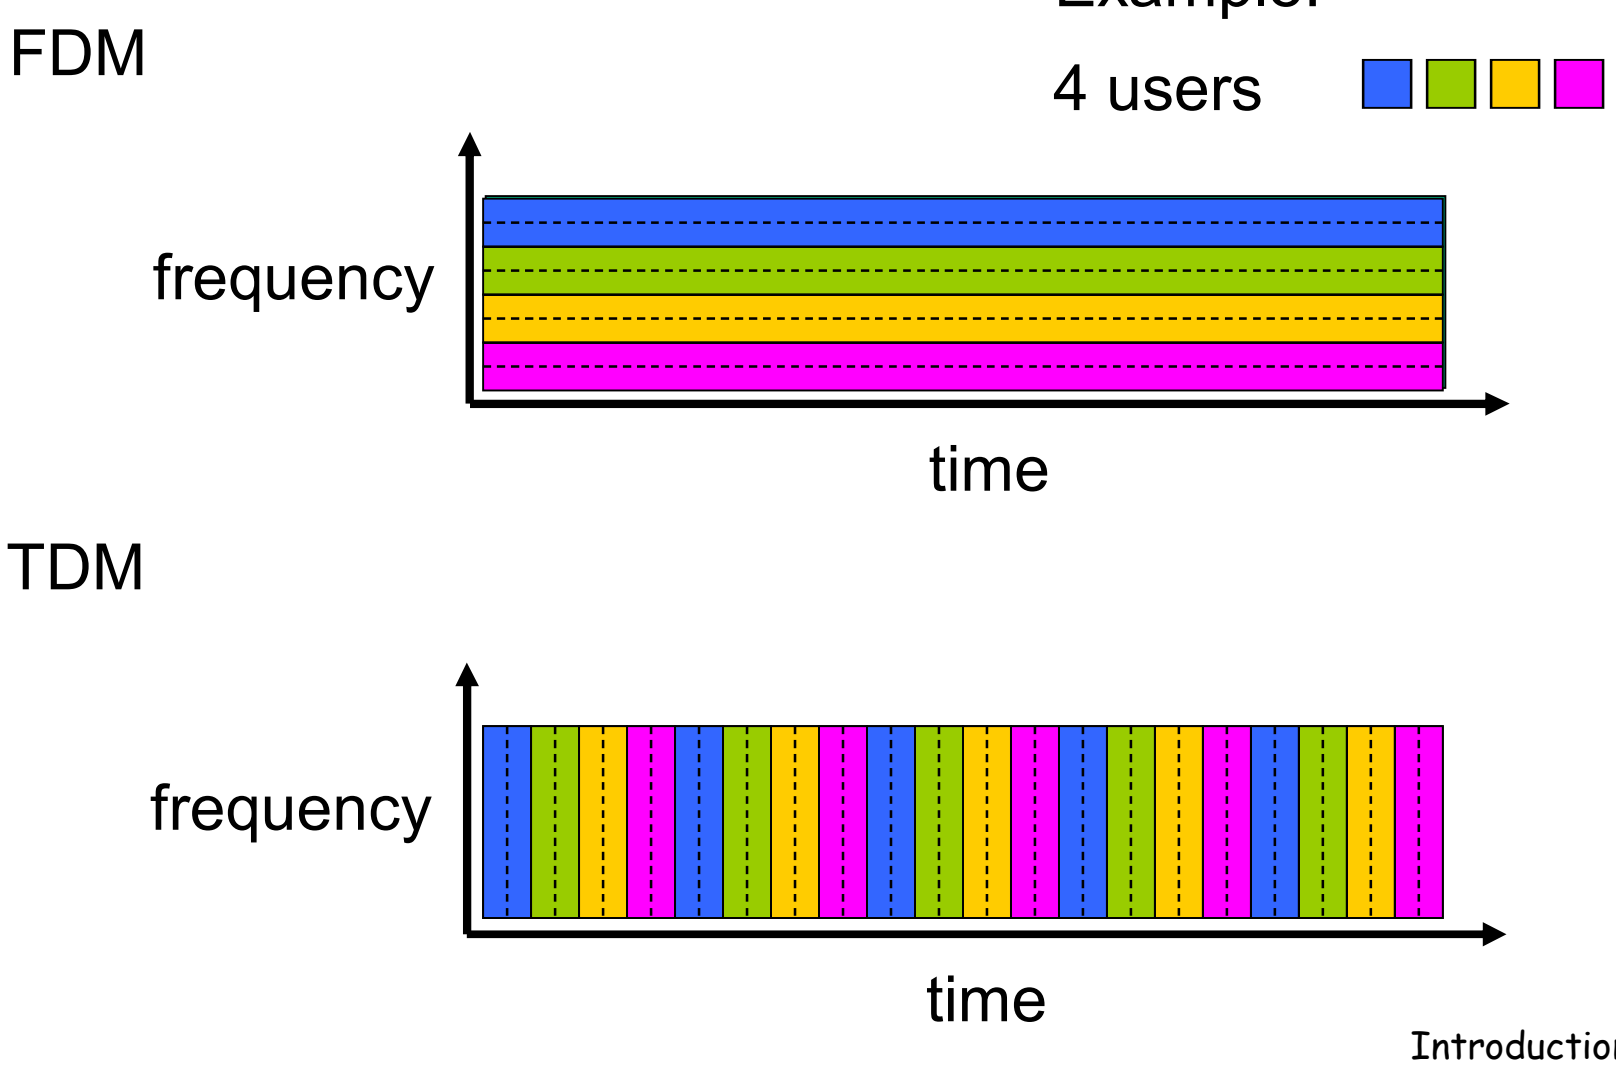

Network Core: Packet Switching

hosts break application-layer messages into *packets*

- forward packets from one router to the next, across links on path from source to destination
- each packet uses full link capacity
- resources used *as needed*

~~Bandwidth division into "pieces"~~
~~Dedicated allocation~~
~~Resource reservation~~

resource contention:

- aggregate resource demand can exceed amount available
- congestion: packets queue, wait for link use
- store-and-forward: packets move one hop at a time
  - Node receives complete packet before forwarding

Packet-switching: store-and-forward

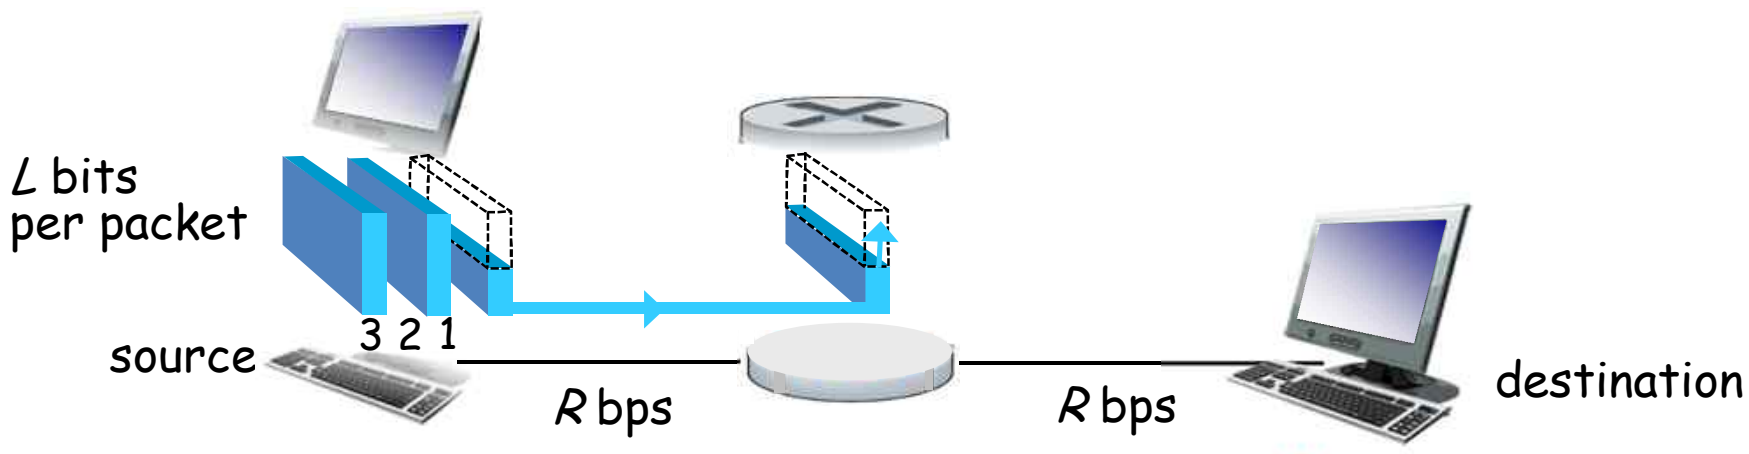

- takes L/R seconds to transmit (push out) packet of L bits on to link at R bps
- *store and forward:* entire packet must arrive at router before it can be transmitted on next link
- delay = 2L/R (assuming zero propagation delay)

Example:

- L = 7.5 Mbits
- R = 1.5 Mbps
- One-hop transmission delay = 5 sec

more on delay shortly …

Packet Switching: queueing delay, loss

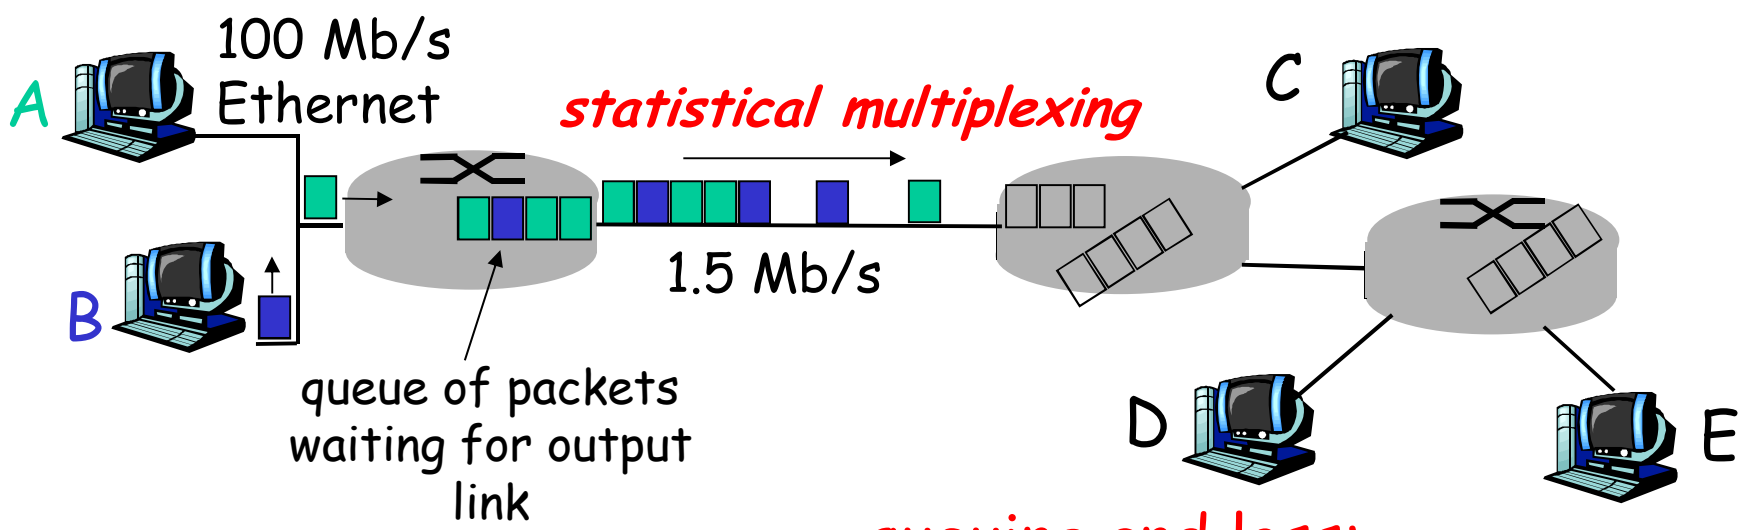

- Sequence of A & B packets does not have fixed pattern, bandwidth shared on demand ➔ ***statistical multiplexing***.
- TDM: each host gets same slot in revolving TDM frame.

queuing and loss:

- If arrival rate (in bits) to link exceeds transmission rate of link for a period of time:
  - packets will queue, wait to be transmitted on link
  - packets can be dropped (lost) if memory (buffer) fills up

Two key network-core functions

routing: determines source-destination route taken by packets
- *routing algorithms*

forwarding: move packets from router's input to appropriate router output

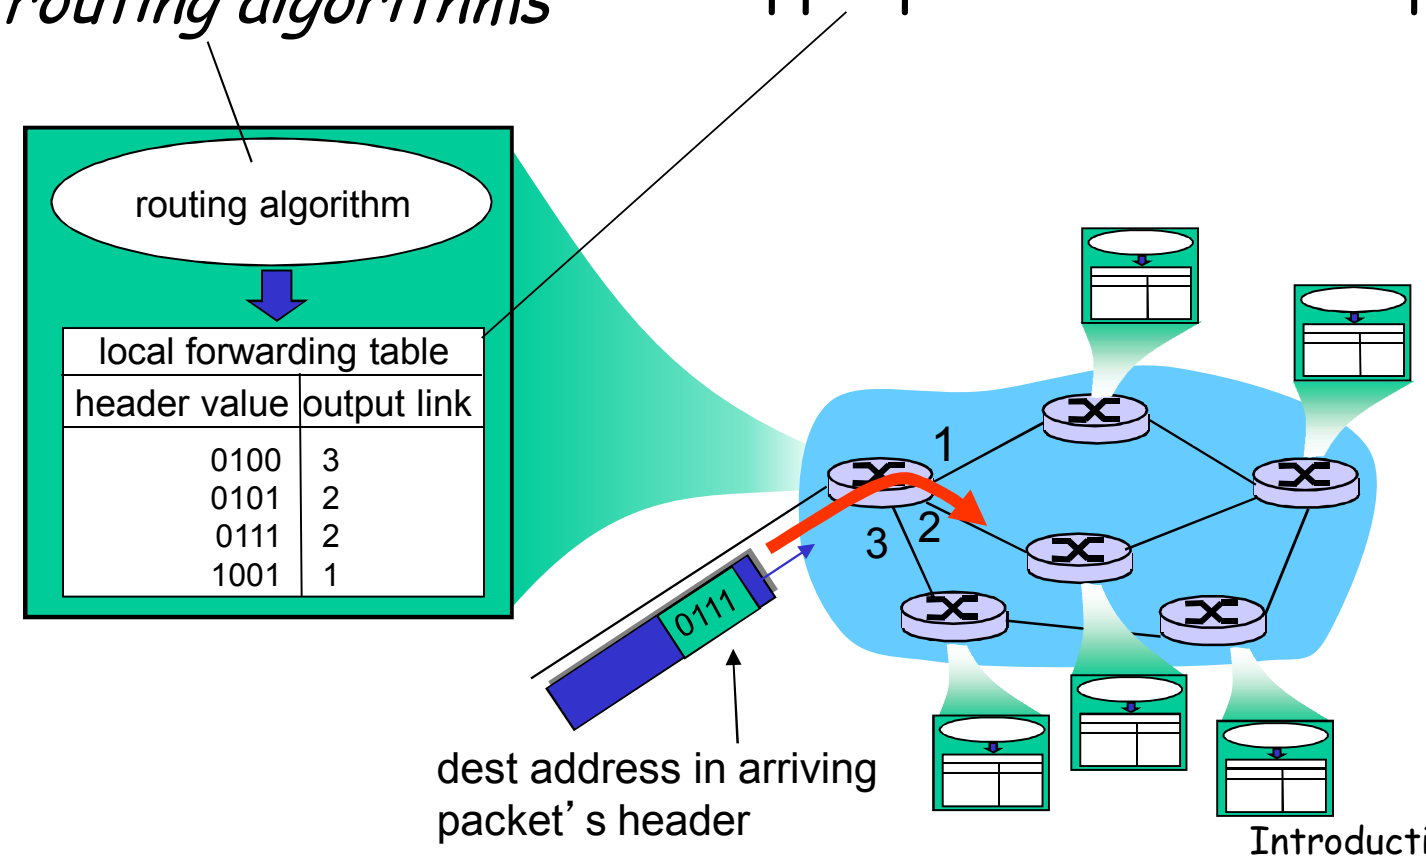

Packet switching versus circuit switching

Packet switching allows more users to use network!

- 1 Mb/s link
- each user:
  - 100 kb/s when "active"
  - active 10% of time
- *circuit-switching:*
  - 10 users
- *packet switching:*
  - with 35 users, probability > 10 active at same time is less than .0004

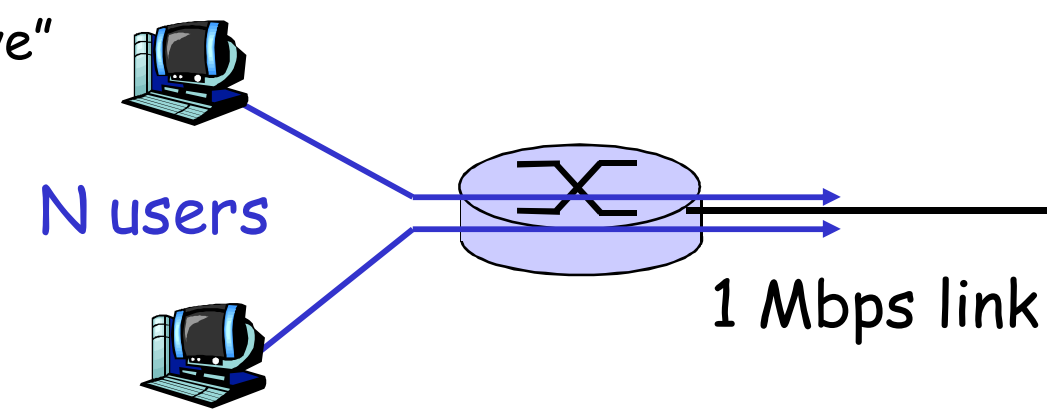

Packet switching versus circuit switching

Is packet switching a "slam dunk winner?"

- great for bursty data
  - resource sharing
  - simpler, no call setup
- excessive congestion possible: packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- Q: How to provide circuit-like behavior?
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem (chapter 7)

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Internet structure: network of networks

- End systems connect to Internet via access ISPs (Internet Service Providers)
  - Residential, company and university ISPs
- Access ISPs in turn must be interconnected.
  - So that any two hosts can send packets to each other
- Resulting network of networks is very complex
  - Evolution was driven by economics and national policies
- Let's take a stepwise approach to describe current Internet structure

Internet structure: network of networks

Question: given *millions* of access ISPs, how to connect them together?

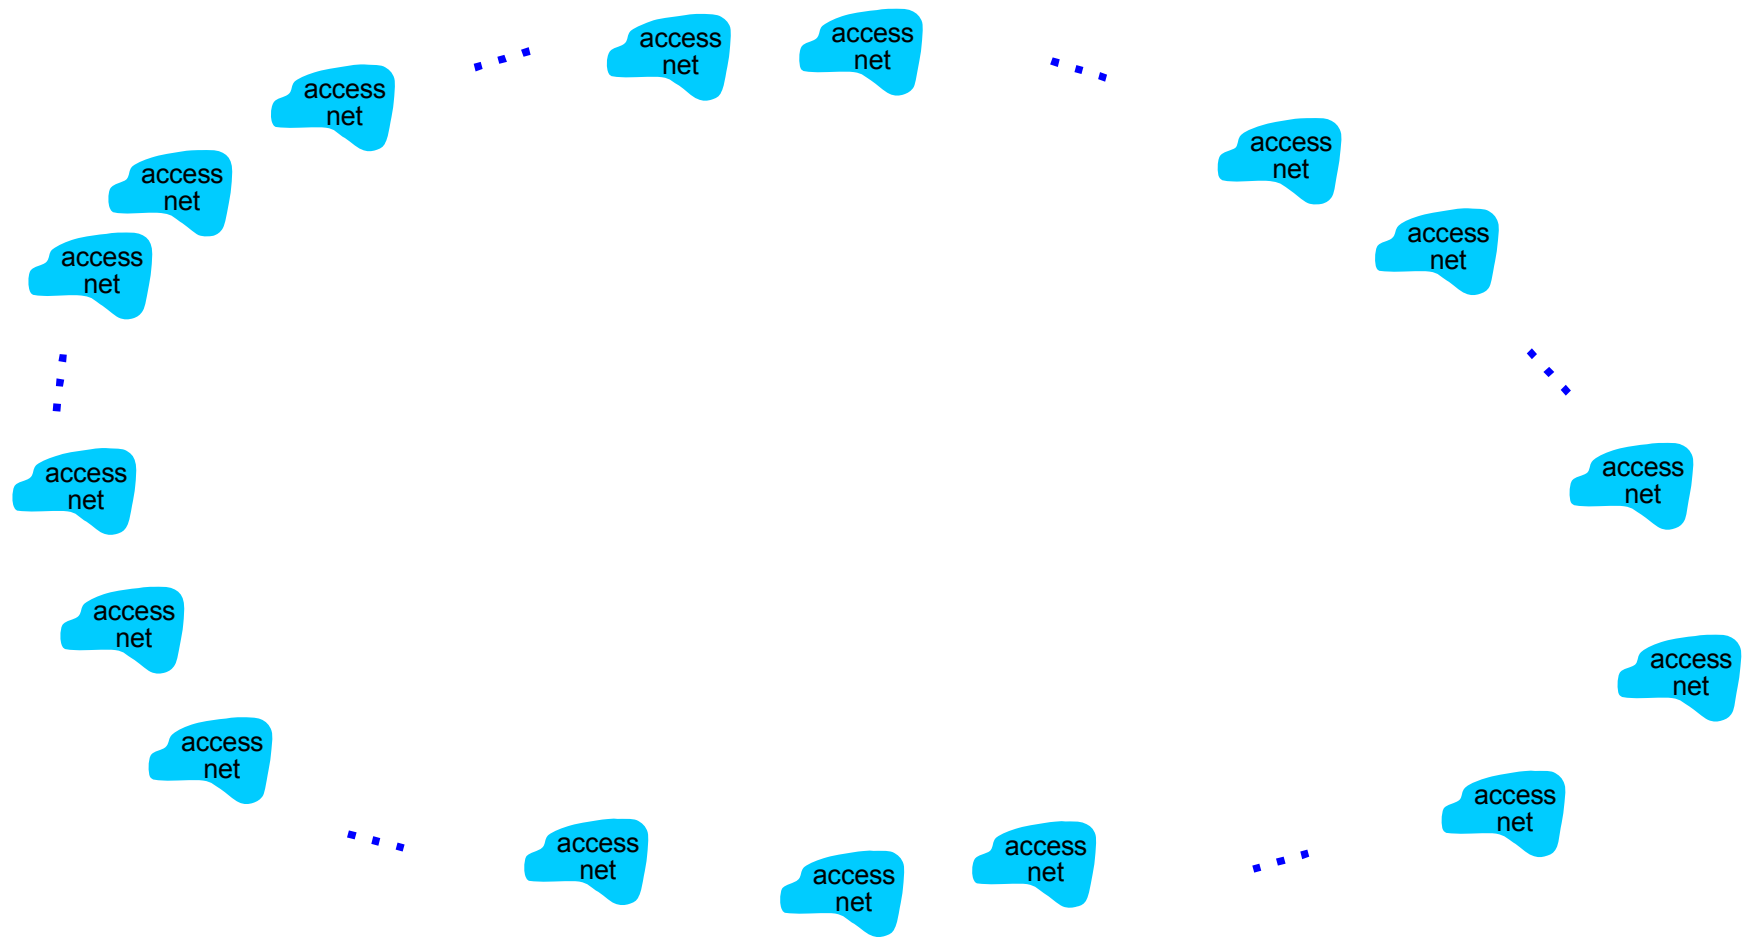

Internet structure: network of networks

Option: connect each access ISP to every other access ISP?

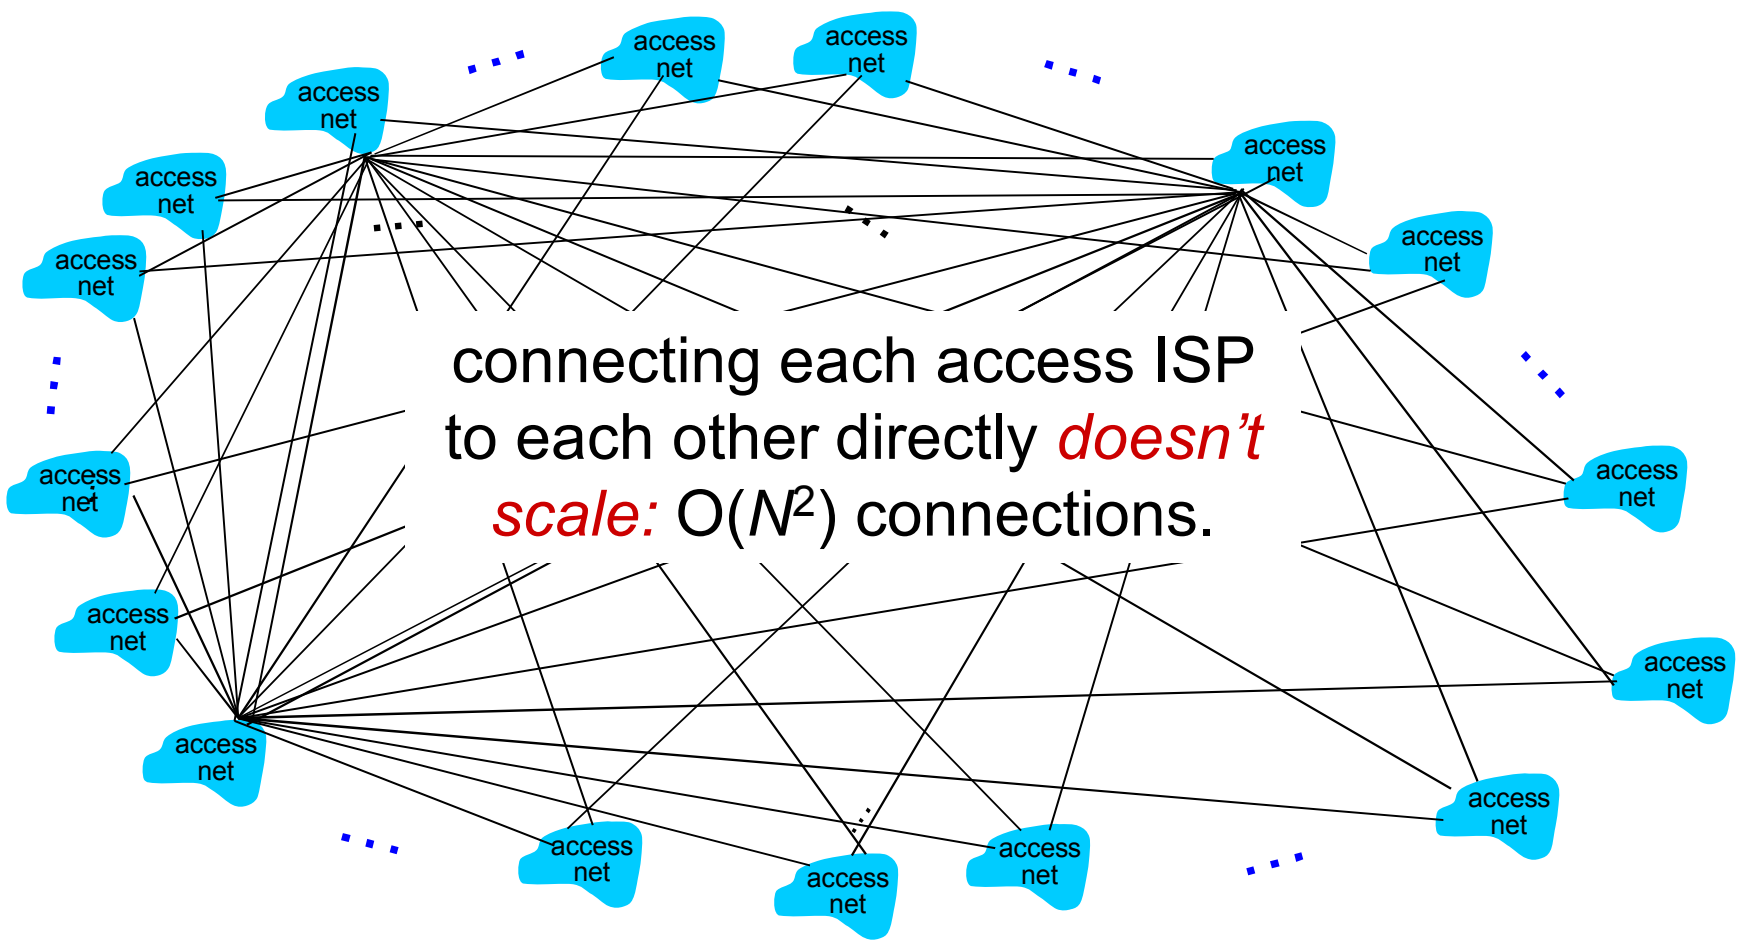

Internet structure: network of networks

Option: connect each access ISP to a global transit ISP? Customer and provider ISPs have economic agreement.

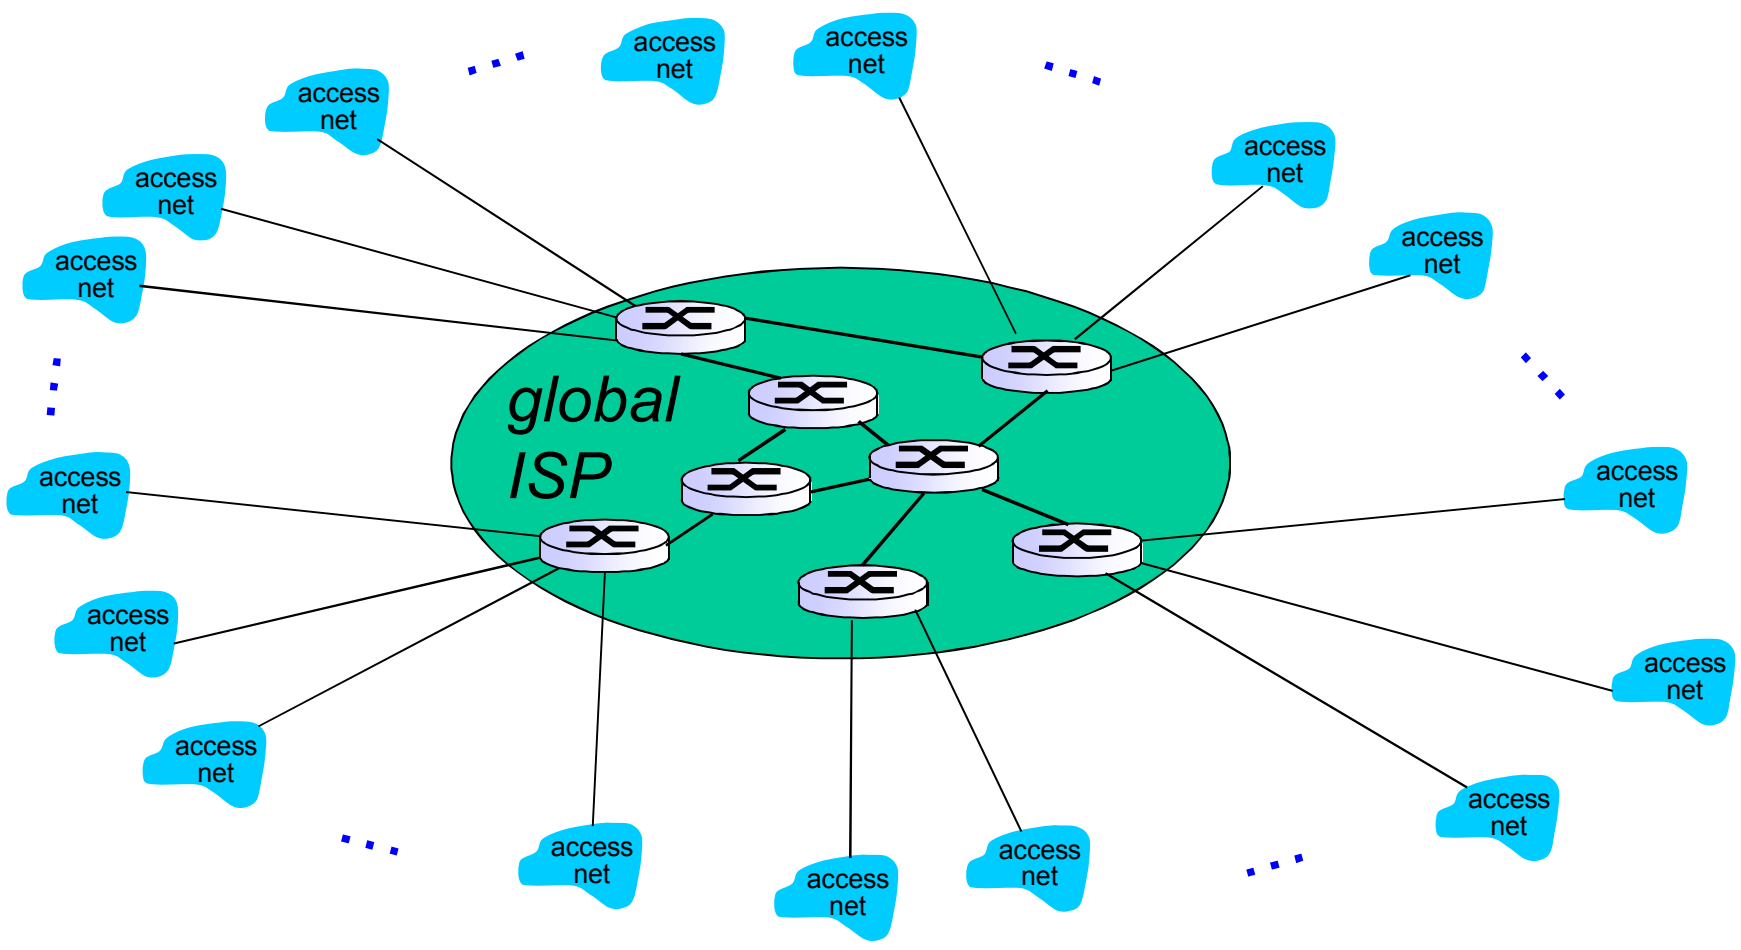

Internet structure: network of networks

But if one global ISP is viable business, there will be competitors ....

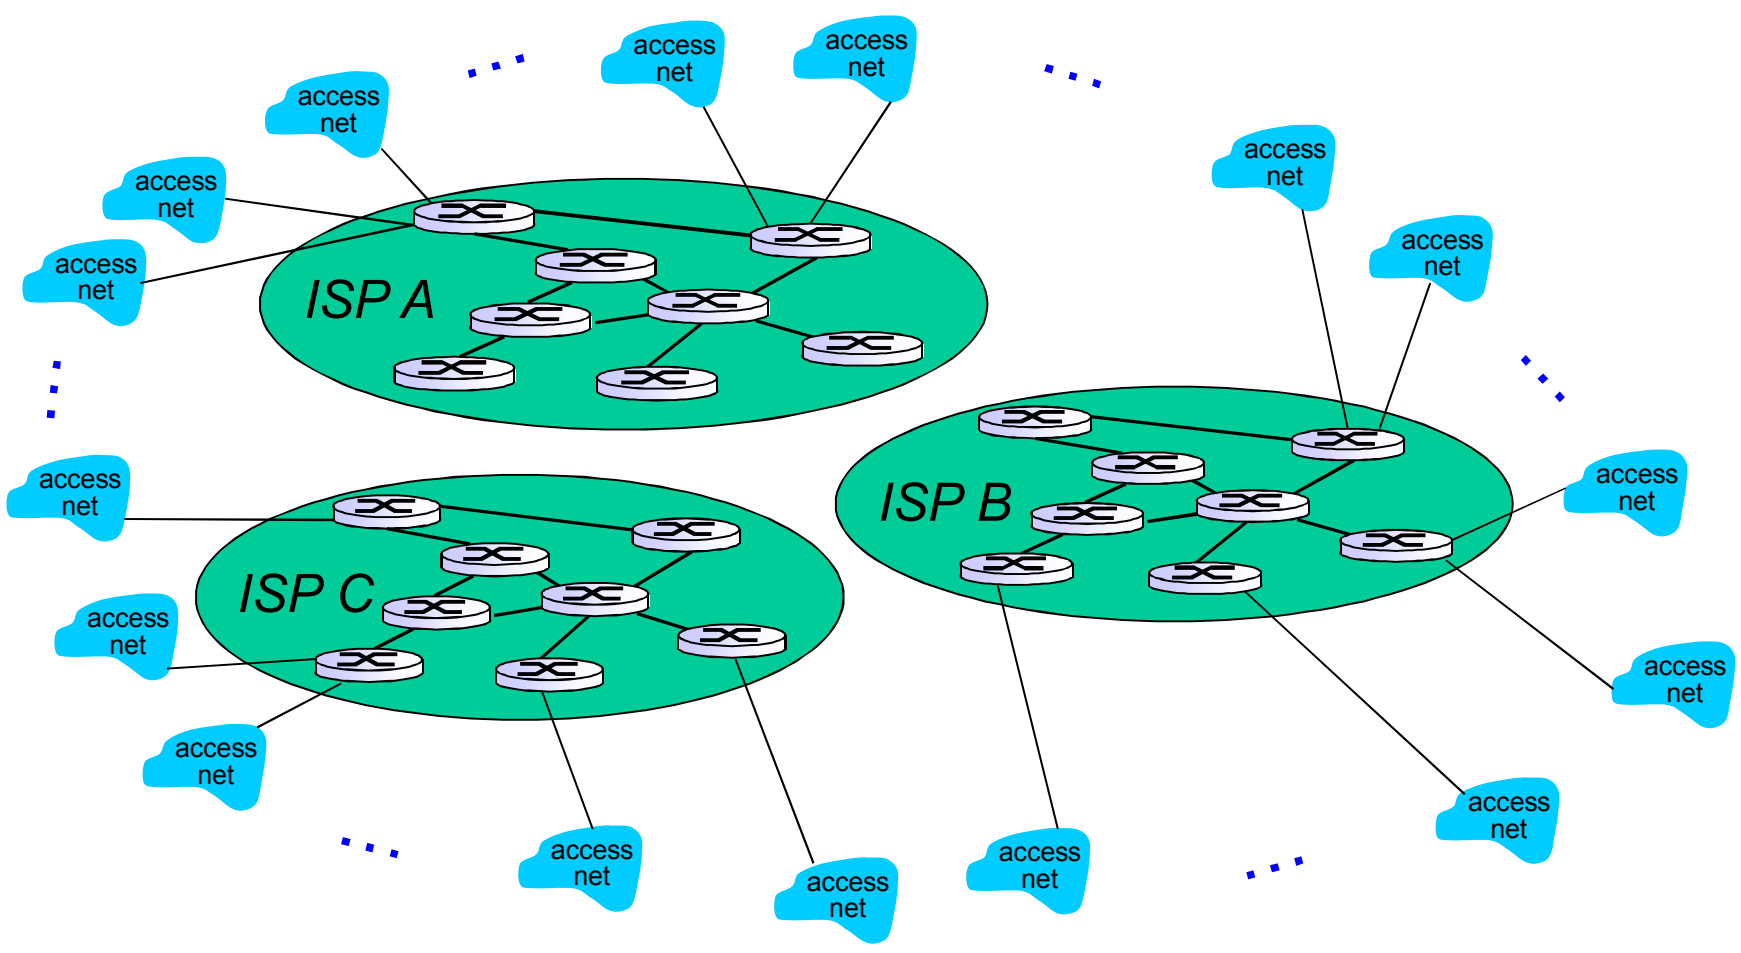

Internet structure: network of networks

But if one global ISP is viable business, there will be competitors .... which must be interconnected

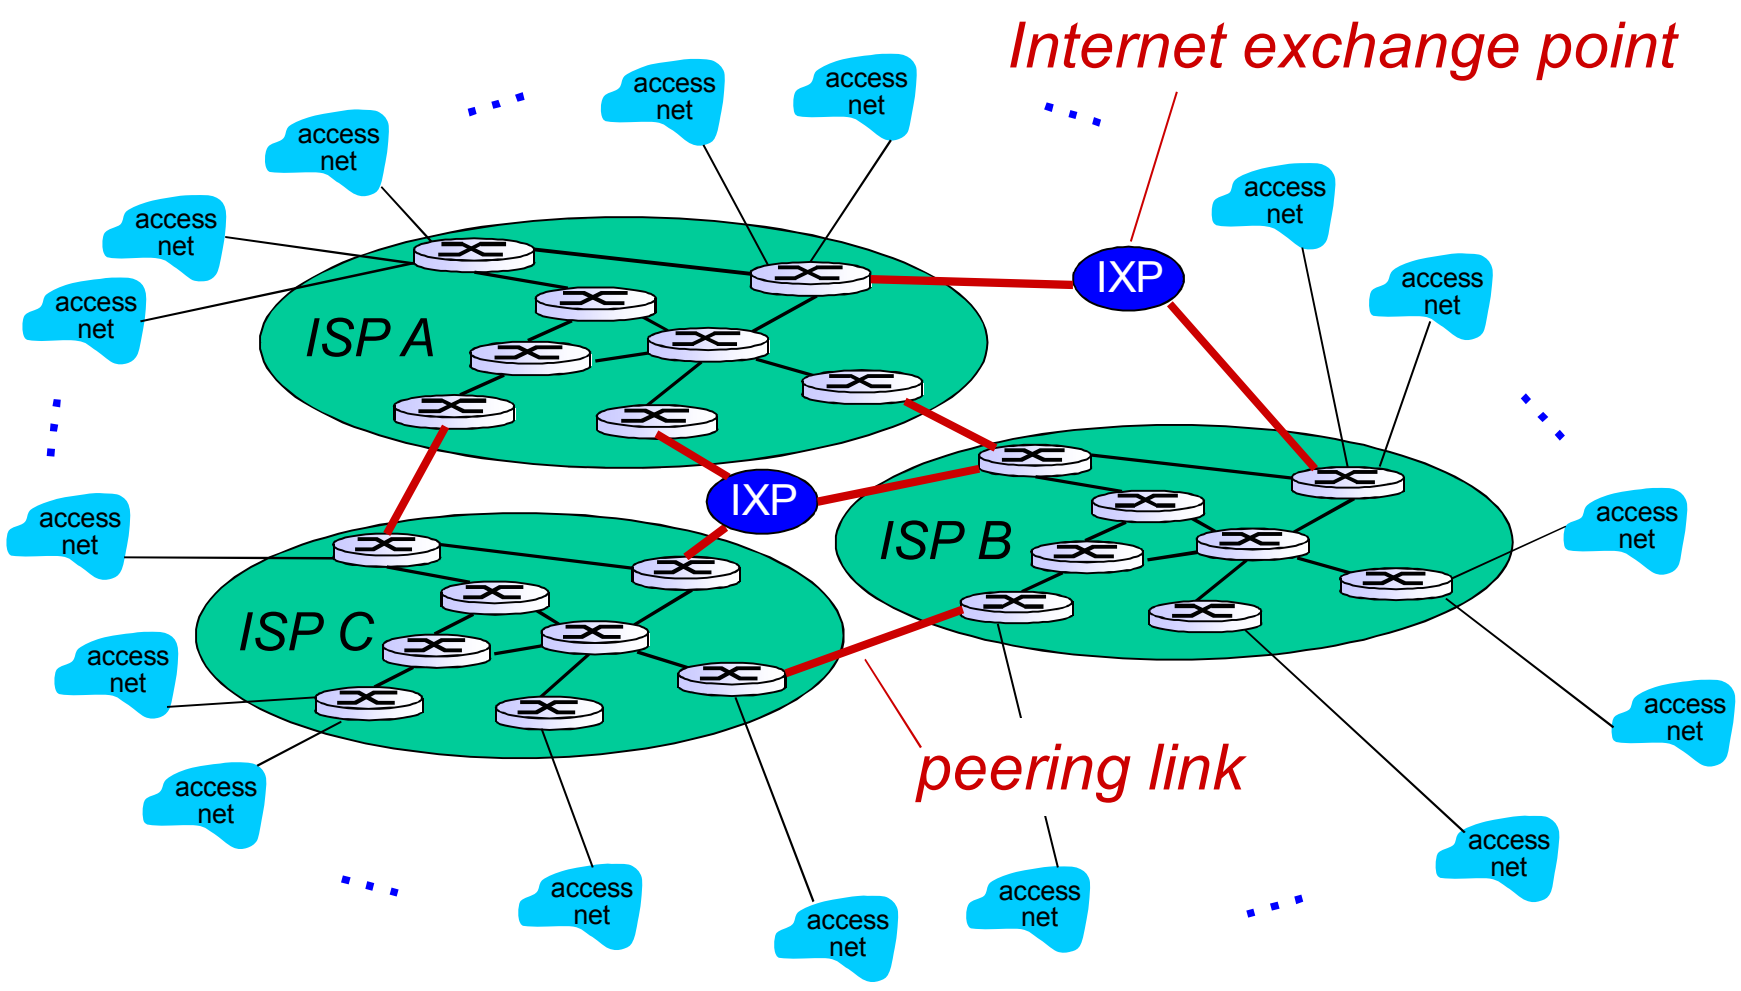

Internet structure: network of networks

… and regional networks may arise to connect access nets to ISPS

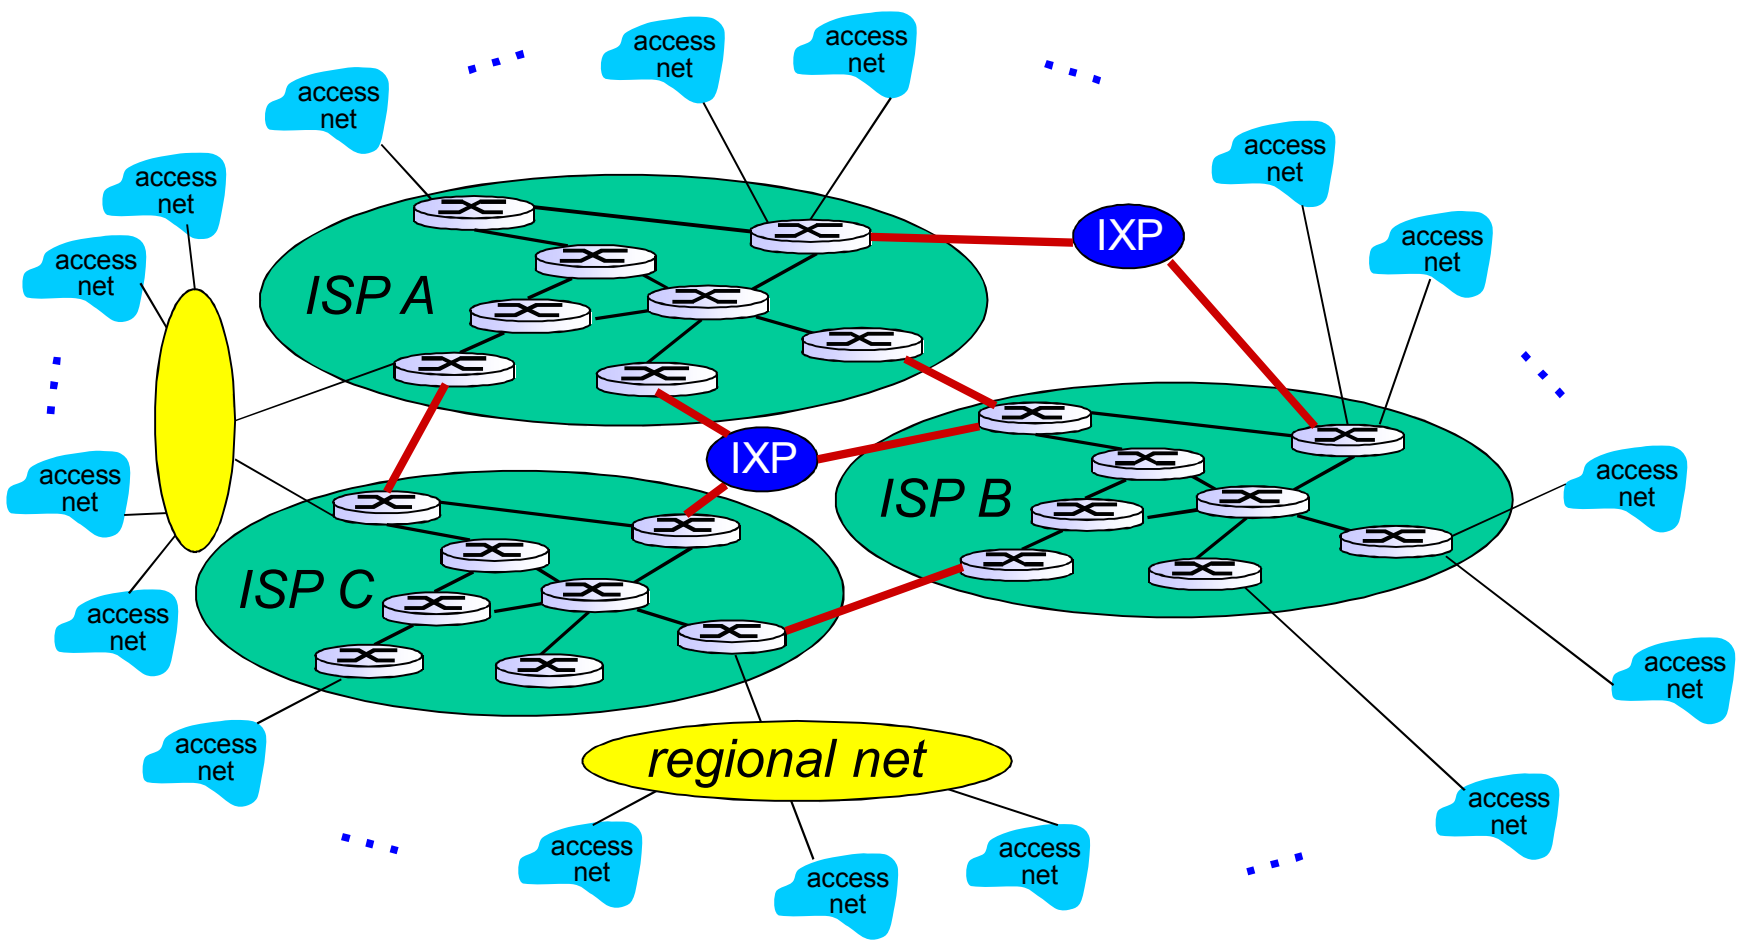

Introduction 1-49

Internet structure: network of networks

… and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

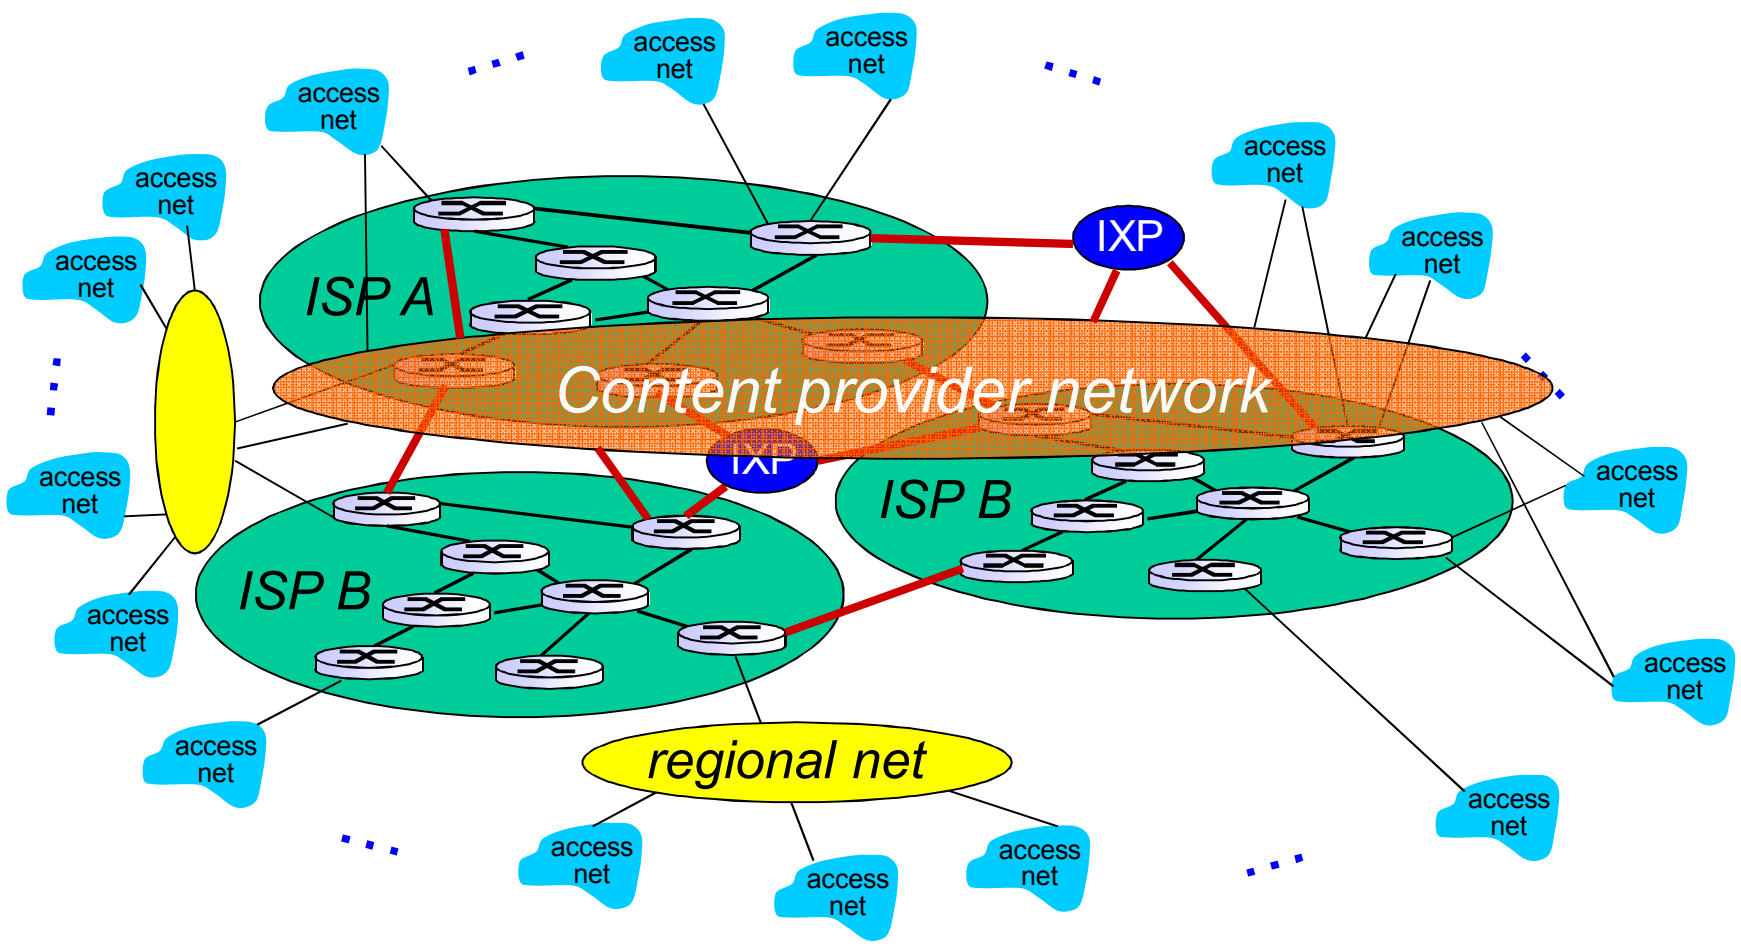

Introduction 1-50

Internet structure: network of networks

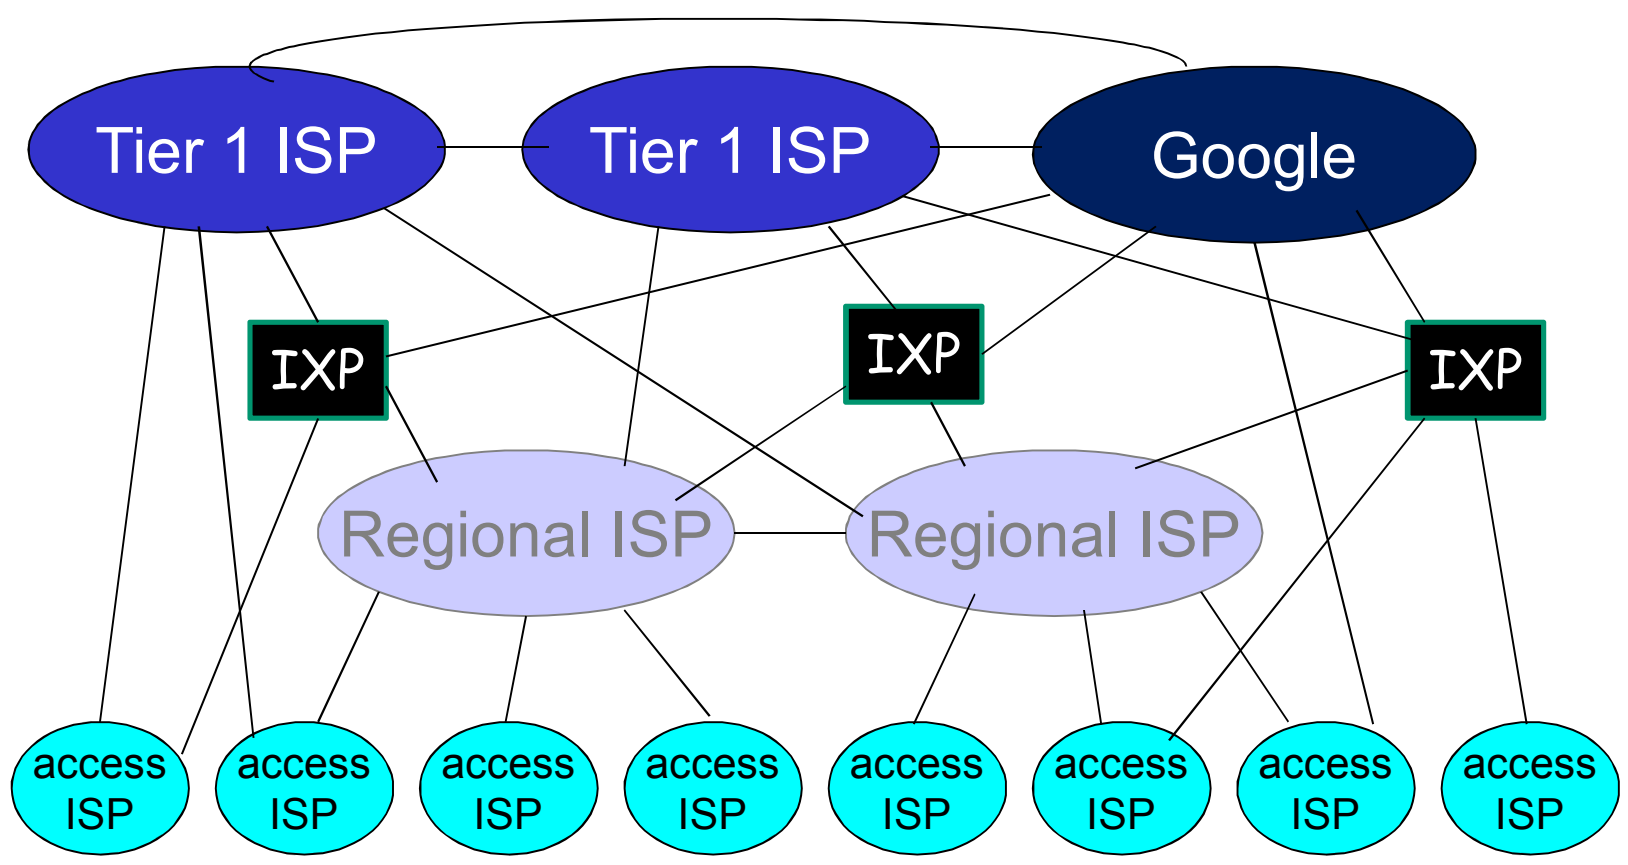

- at center: small # of well-connected large networks
  - "tier-1" commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
  - content provider network (e.g, Google): private network that connects it data centers to Internet, often bypassing tier-1, regional ISPs

Introduction 1-51

Internet structure: network of networks

- roughly hierarchical
- at center: "tier-1" ISPs (e.g., Verizon, Sprint, AT&T, Cable and Wireless), national/international coverage
  - treat each other as equals

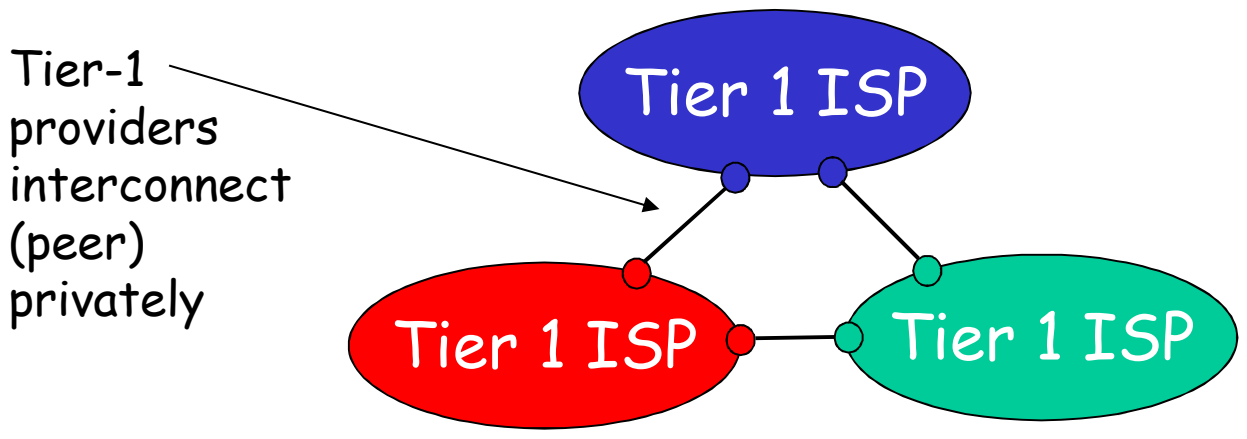

Introduction 1-52

Tier-1 ISP: e.g., Sprint

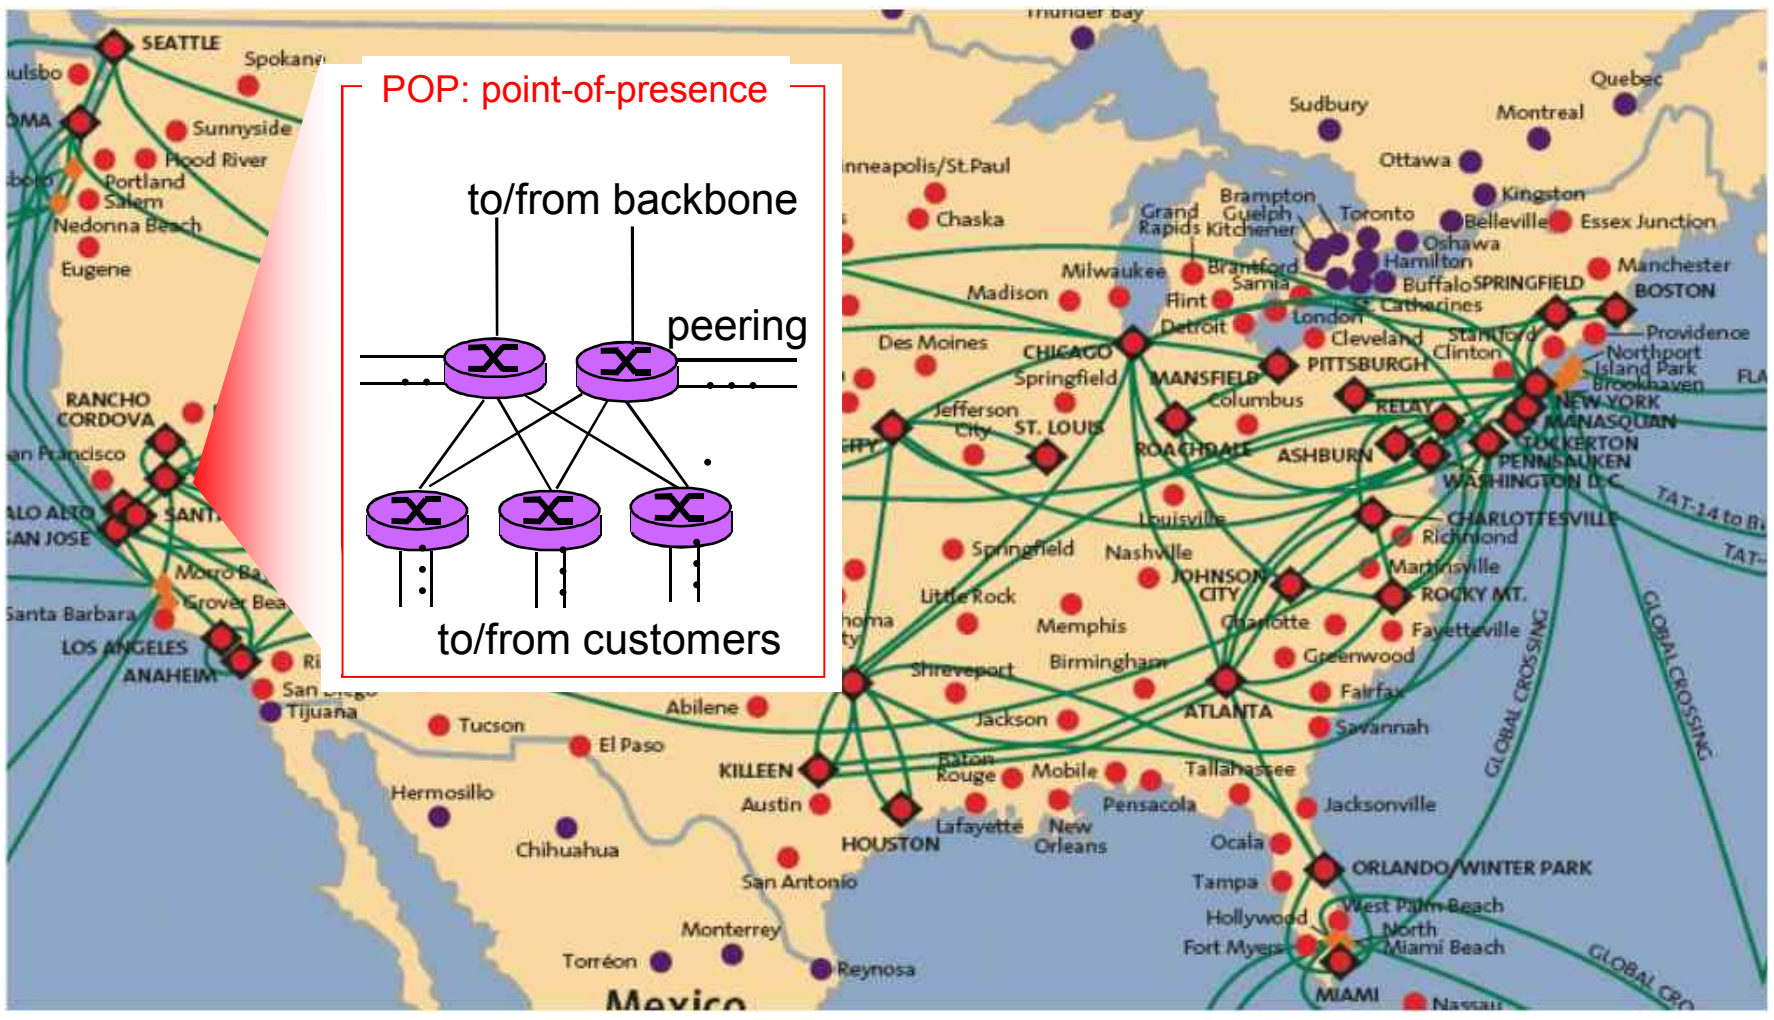

Internet structure: network of networks

- "Tier-2" ISPs: smaller (often regional) ISPs
  - Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

Tier-2 ISP pays tier-1 ISP for connectivity to rest of Internet
- tier-2 ISP is *customer* of tier-1 provider

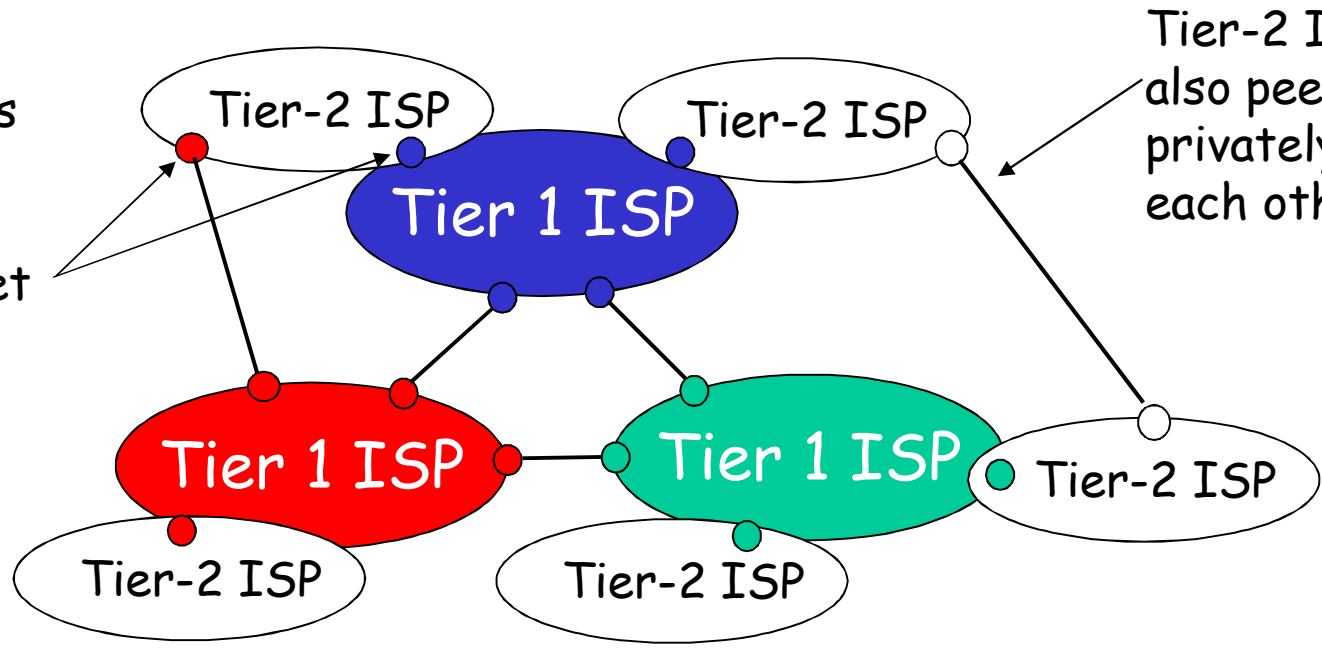

Tier-2 ISPs also peer privately with each other.

Internet structure: network of networks

- "Tier-3" ISPs and local ISPs
  - last hop ("access") network (closest to end systems)

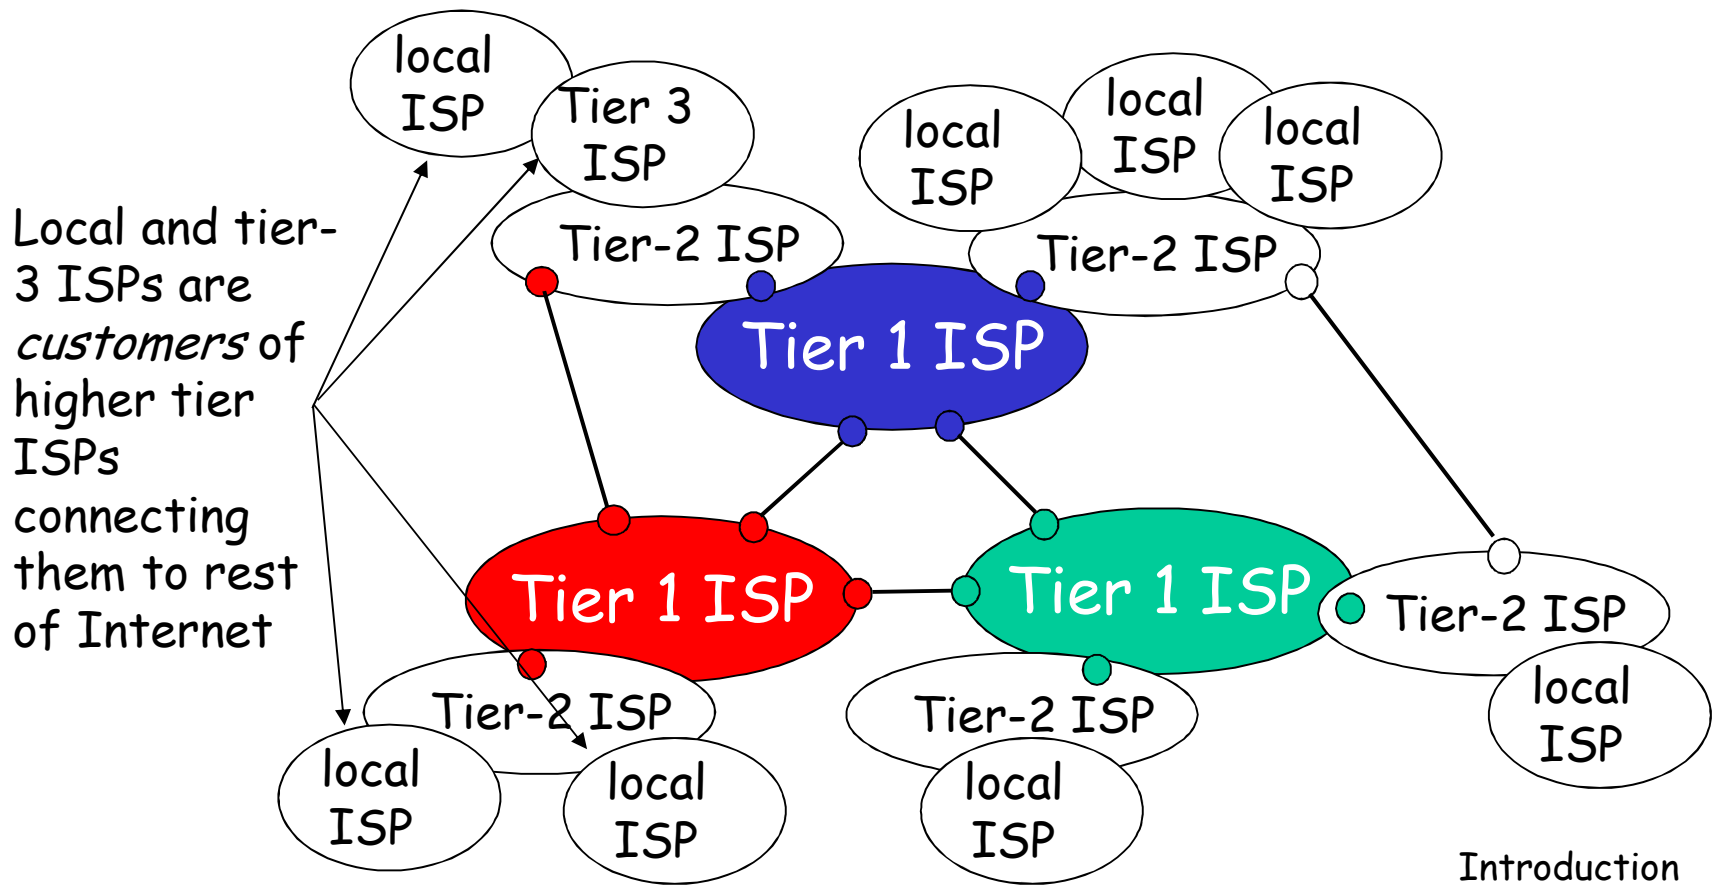

Internet structure: network of networks

- a packet passes through many networks!

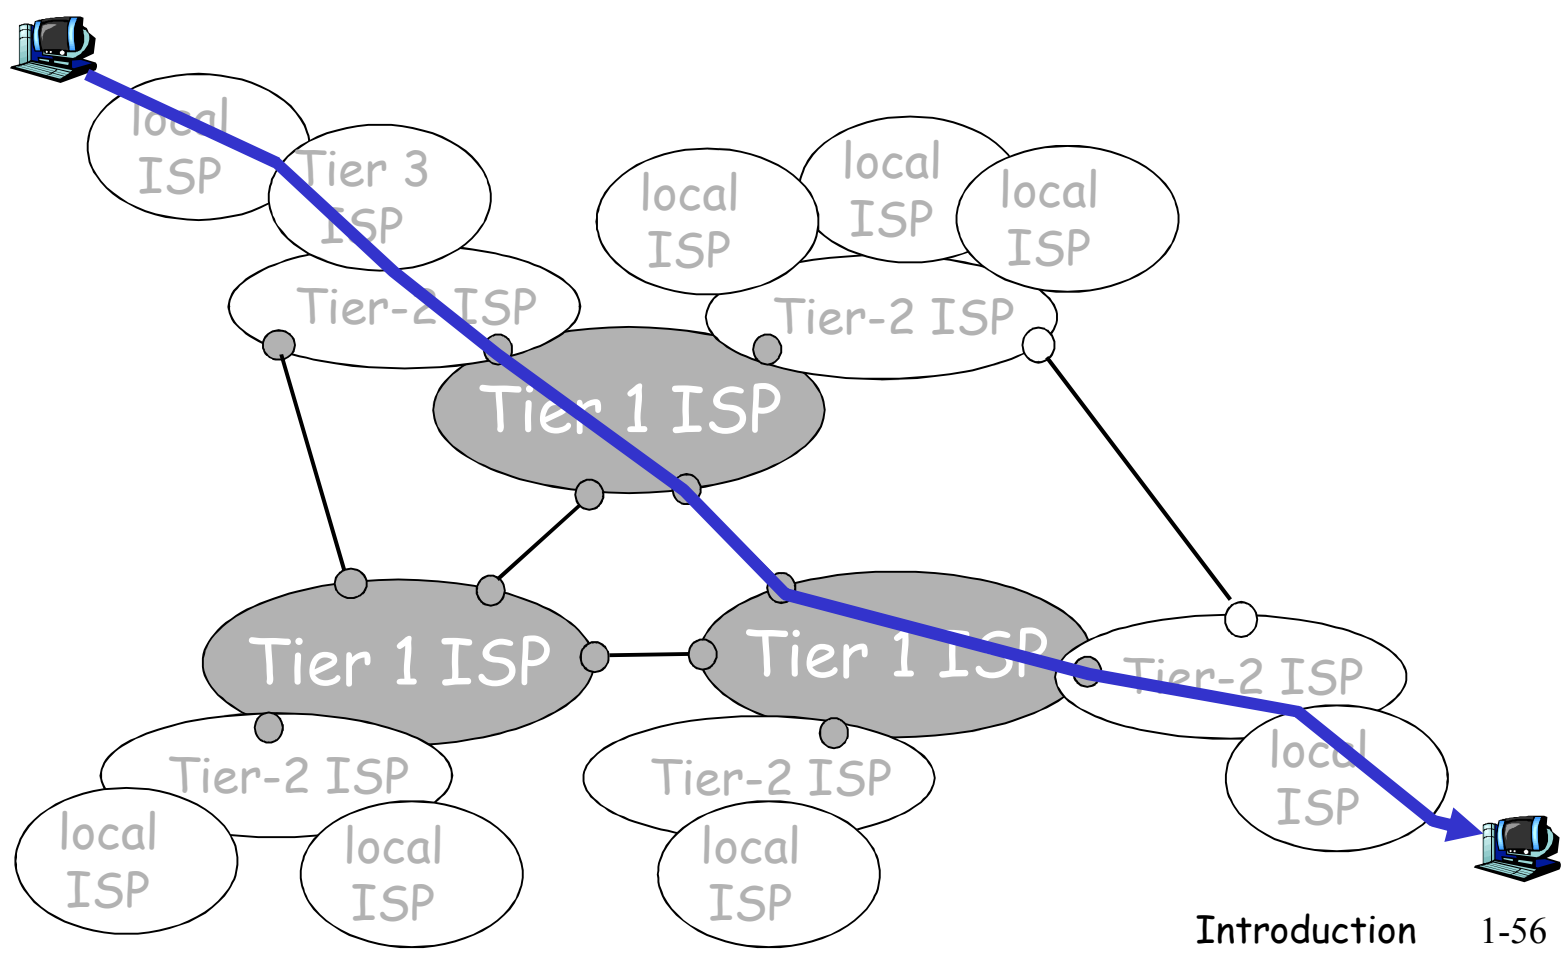

Chapter 1: roadmap

How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link exceeds output link capacity
- packets queue, wait for turn

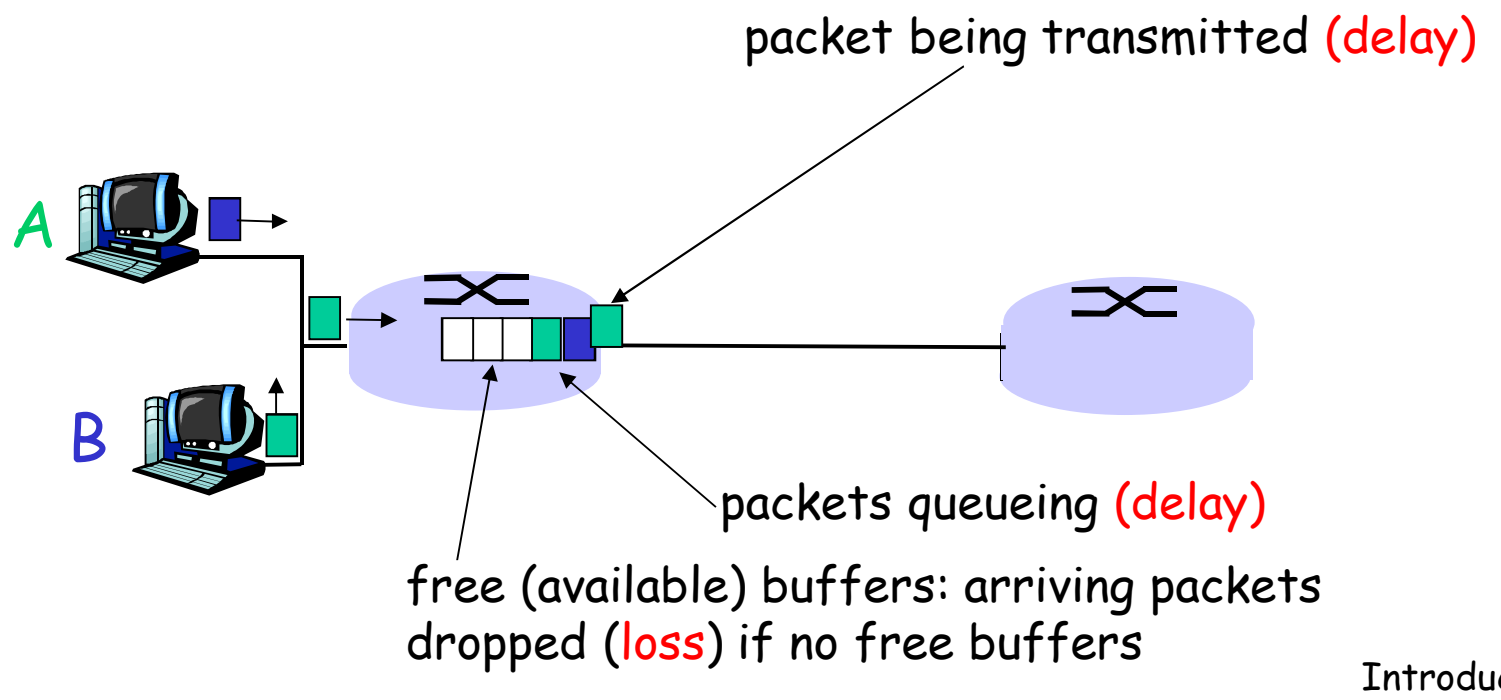

Four sources of packet delay

- 1. nodal processing:
  - check bit errors
  - determine output link
- 2. queueing
  - time waiting at output link for transmission
  - depends on congestion level of router

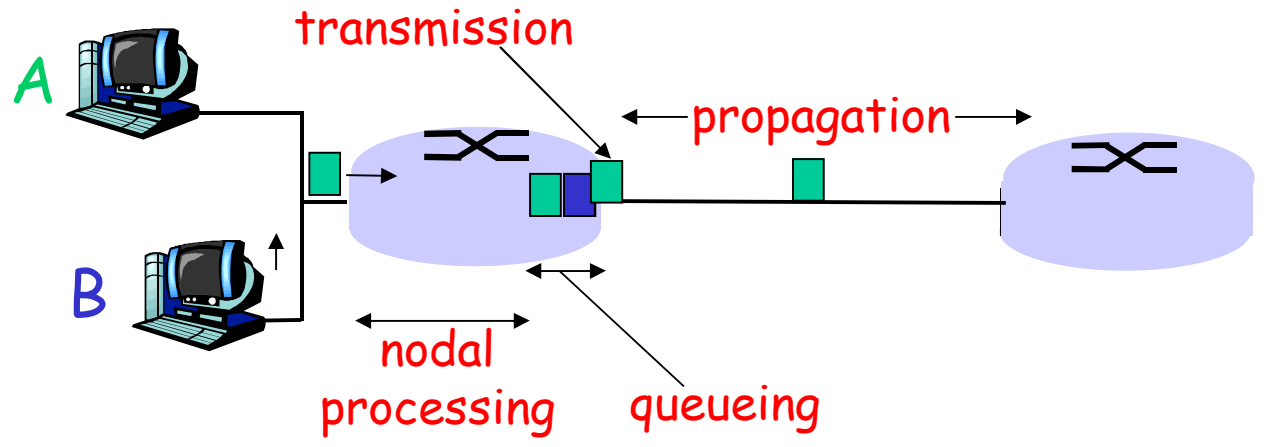

Delay in packet-switched networks

3. Transmission delay:
- R=link bandwidth (bps)
- L=packet length (bits)
- time to send bits into link = L/R

4. Propagation delay:
- d = length of physical link
- s = propagation speed in medium (~$2x10^8$ m/sec)
- propagation delay = d/s

Note: s and R are *very* different quantities!

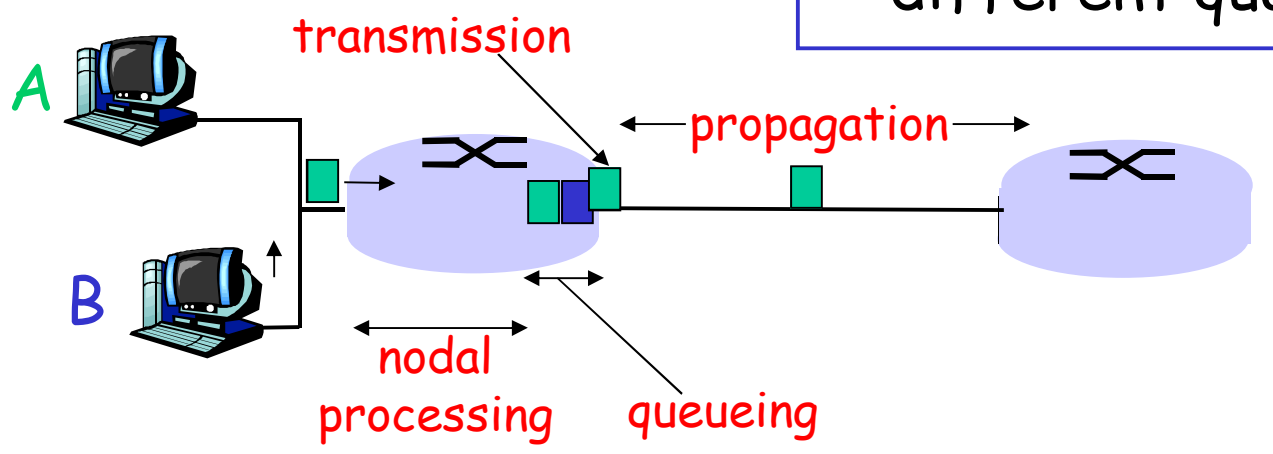

Caravan analogy

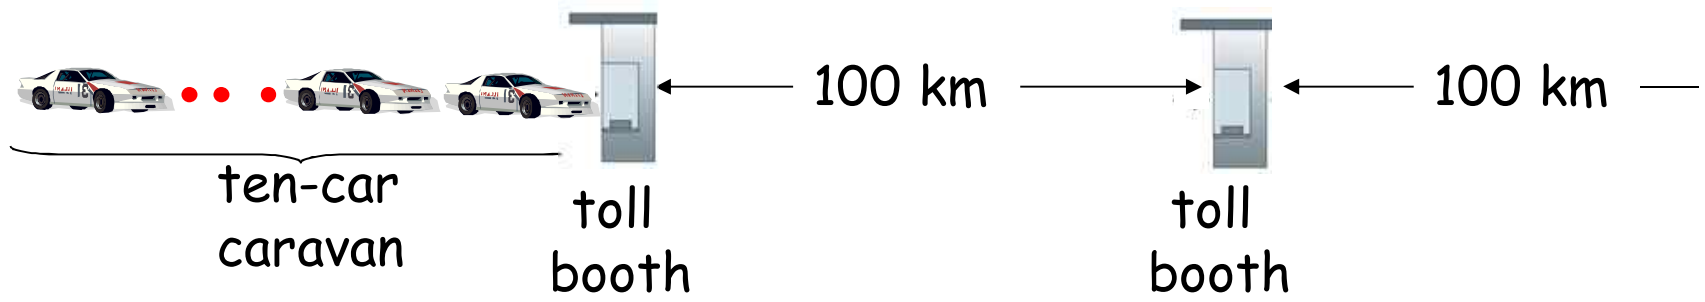

- cars "propagate" at 100 km/hr
- toll booth takes 12 sec to service car (transmission time)
- car~bit; caravan ~ packet
- Q: How long until caravan is lined up before 2nd toll booth?
- Time to "push" entire caravan through toll booth onto highway = 12*10 = 120 sec
- Time for last car to propagate from 1st to 2nd toll both: 100km/(100km/hr)= 1 hr
- A: 62 minutes

Caravan analogy (more)

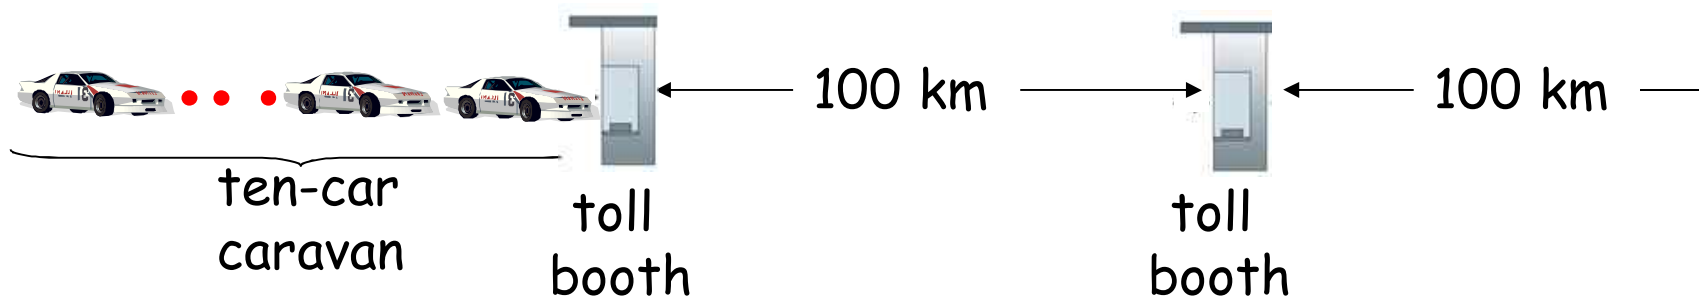

- Cars now "propagate" at 1000 km/hr
- Toll booth now takes 1 min to service a car
- Q: Will cars arrive to 2nd booth before all cars serviced at 1st booth?
- Yes! After 7 min, 1st car at 2nd booth and 3 cars still at 1st booth.
- 1st bit of packet can arrive at 2nd booth before packet is fully transmitted at 1st booth!

Nodal delay

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

- d_{proc} = processing delay
  - typically a few microsecs or less
- d_{queue} = queuing delay
  - depends on congestion
- d_{trans} = transmission delay
  - = L/R, significant for low-speed links
- d_{prop} = propagation delay
  - a few microsecs to hundreds of msecs

Queueing delay (revisited)

- R=link bandwidth (bps)
- L=packet length (bits)
- a=average packet arrival rate

traffic intensity = La/R



- La/R ~ 0: average queueing delay small
- La/R -> 1: delays become large
- La/R > 1: more "work" arriving than can be serviced, average delay infinite!



"Real" Internet delays and routes

- What do "real" Internet delay & loss look like?
- **Traceroute program:** provides delay measurement from source to router along end-end Internet path towards destination. For all *i*:
  - sends three packets that will reach router *i* on path towards destination
  - router *i* will return packets to sender
  - sender times interval between transmission and reply.



Introduction 1-65

"Real" Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

Three delay measurements from gaia.cs.umass.edu to cs-gw.cs.umass.edu

```
1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms 5 ms 5 ms
4  jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)  16 ms 11 ms 13 ms
5  jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms 18 ms 18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms 109 ms 106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms 102 ms 104 ms
10  de.fr1.fr.geant.net (62.40.96.50)  113 ms 121 ms 114 ms
11  renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12  nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13  nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14  r3t2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15  eurecom-valbonne.r3t2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16  194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17  * * *
18  * * *
19  fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
```

trans-oceanic link

* means no response (probe lost, router not replying)

Introduction 1-66

Packet loss

- queue (aka buffer) preceding link in buffer has finite capacity
- packet arriving to full queue dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not at all

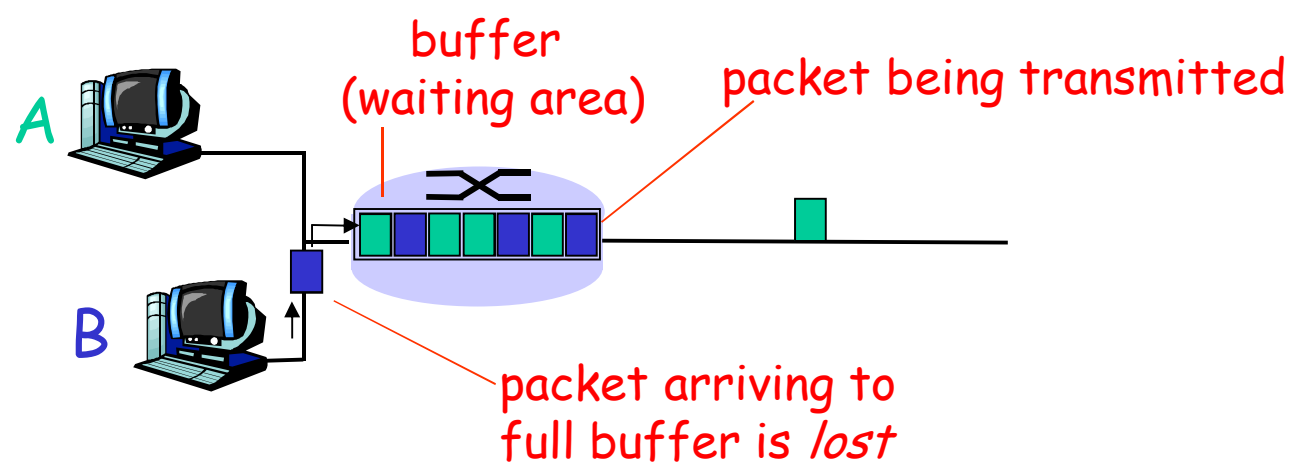

Throughput

- *throughput:* rate (bits/time unit) at which bits transferred between sender/receiver
  - *instantaneous:* rate at given point in time
  - *average:* rate over longer period of time

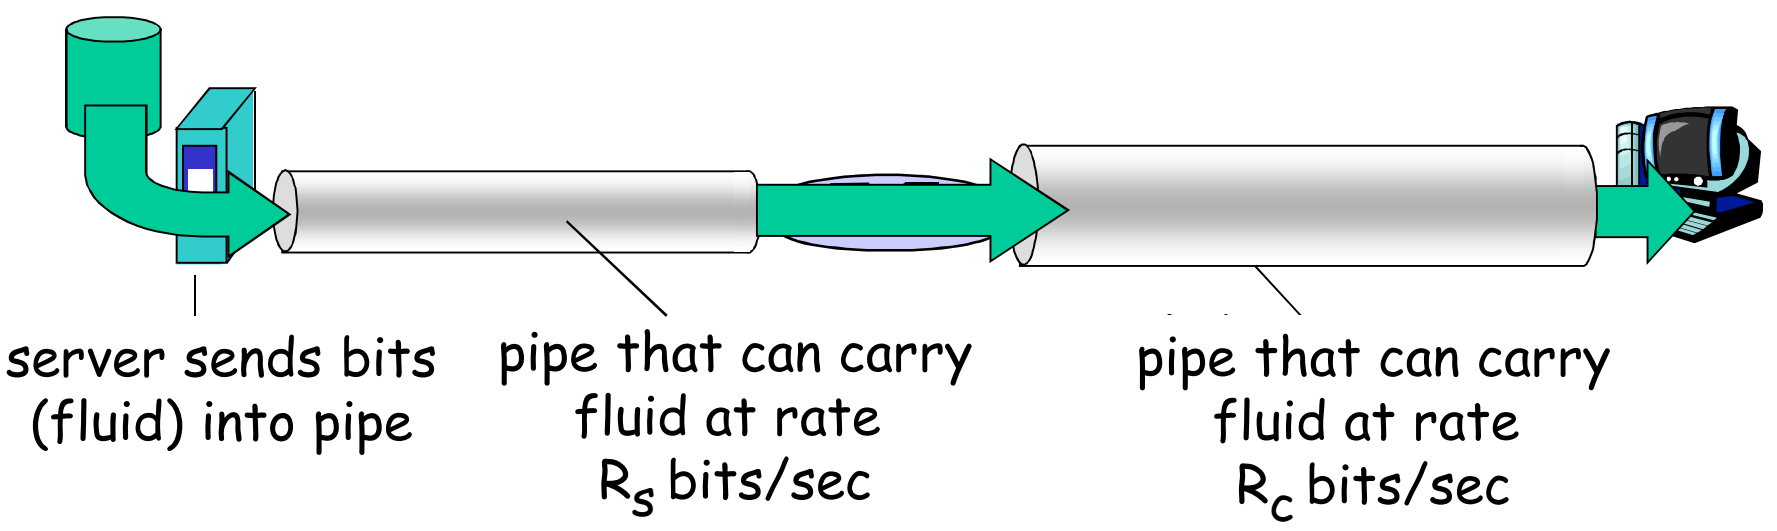

Throughput (more)

- $R_s < R_c$ What is average end-end throughput?



- $R_s > R_c$ What is average end-end throughput?



bottleneck link

link on end-end path that constrains end-end throughput

Throughput: Internet scenario

- per-connection end-end throughput: $\min(R_c,R_s,R/10)$
- in practice: R_c or R_s is often bottleneck

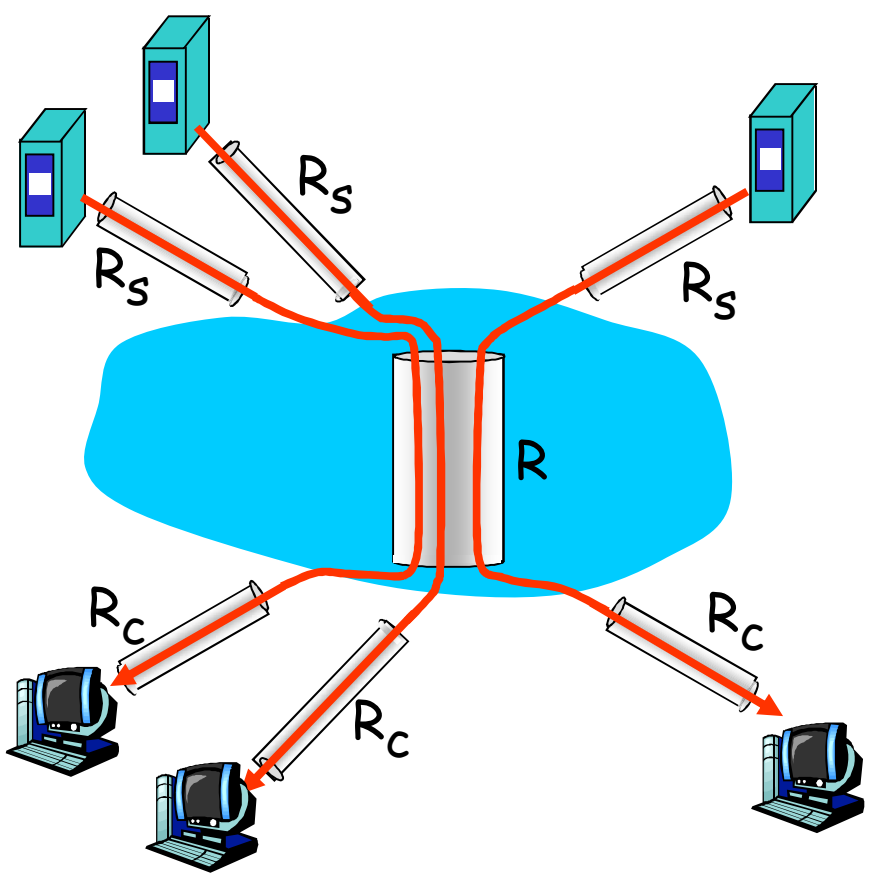

10 connections (fairly) share backbone bottleneck link R bits/sec

Chapter 1: roadmap

Protocol "Layers"

Networks are complex!

- many "pieces":
  - hosts
  - routers
  - links of various media
  - applications
  - protocols
  - hardware, software

Question:

Is there any hope of *organizing* structure of network?

Or at least our discussion of networks?

Organization of air travel

ticket (purchase) — ticket (complain)

baggage (check) — baggage (claim)

gates (load) — gates (unload)

runway takeoff — runway landing

airplane routing — airplane routing

airplane routing

- a series of steps

Layering of airline functionality

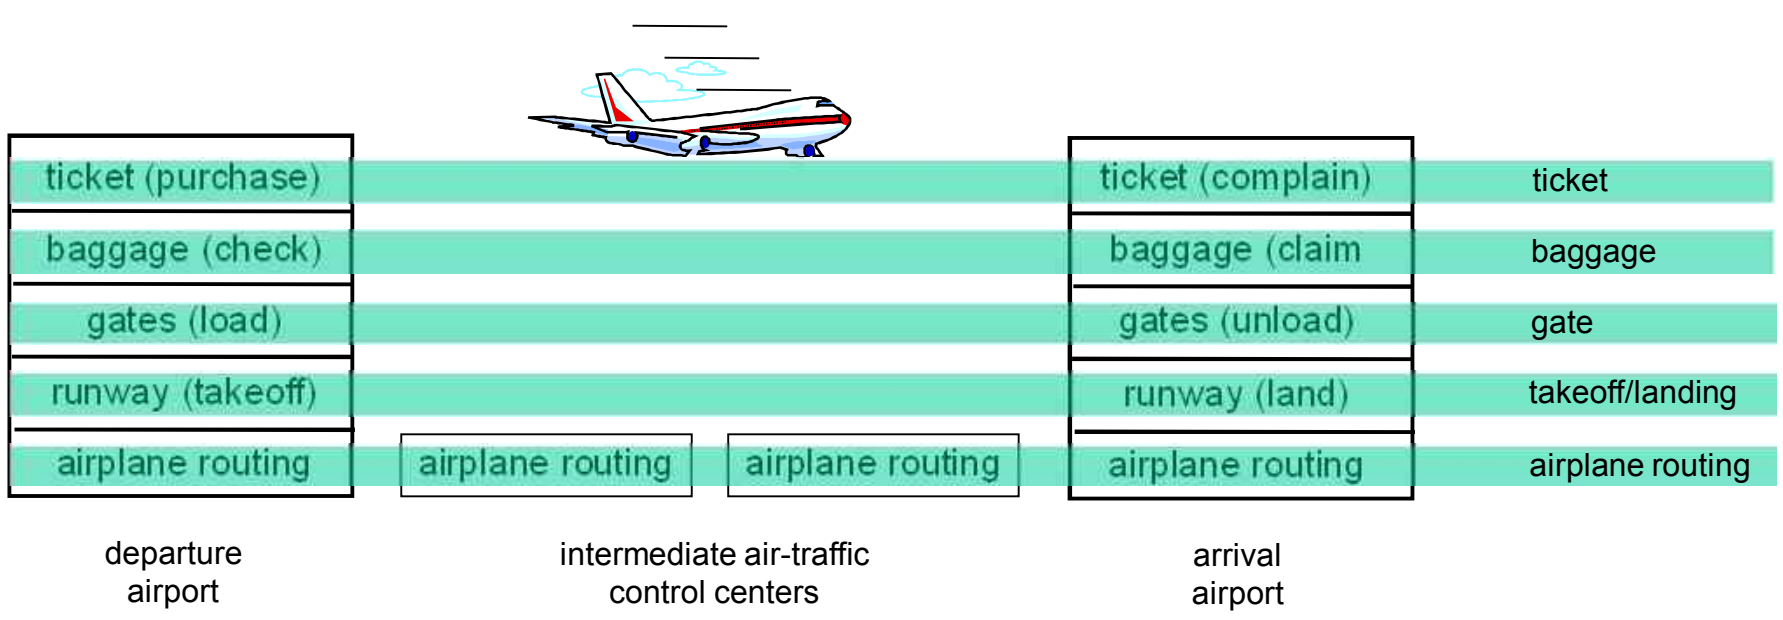

Layers: each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Why layering?

Dealing with complex systems:

- explicit structure allows identification, relationship of complex system's pieces
  - layered reference model for discussion
- modularization eases maintenance, updating of system
  - change of implementation of layer's service transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system
- layering considered harmful?

Internet protocol stack

- application: supporting network applications
  - FTP, SMTP, HTTP
- transport: process-process data transfer
  - TCP, UDP
- network: routing of datagrams from source to destination
  - IP, routing protocols
- link: data transfer between neighboring network elements
  - PPP, Ethernet
- physical: bits "on the wire"

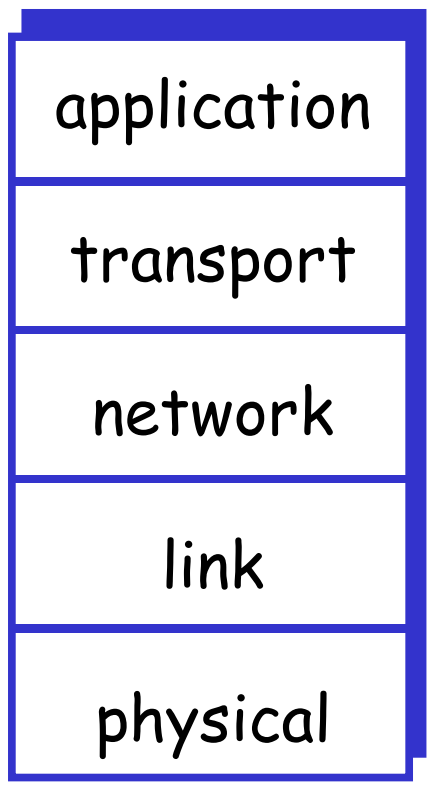

ISO/OSI reference model

- presentation: allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- *session:* synchronization, checkpointing, recovery of data exchange
- Internet stack "missing" these layers!
  - these services, *if needed,* must be implemented in application
  - needed?

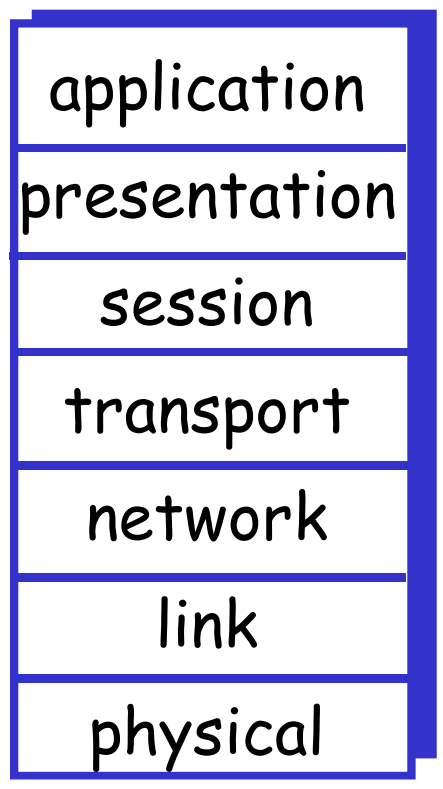

Encapsulation

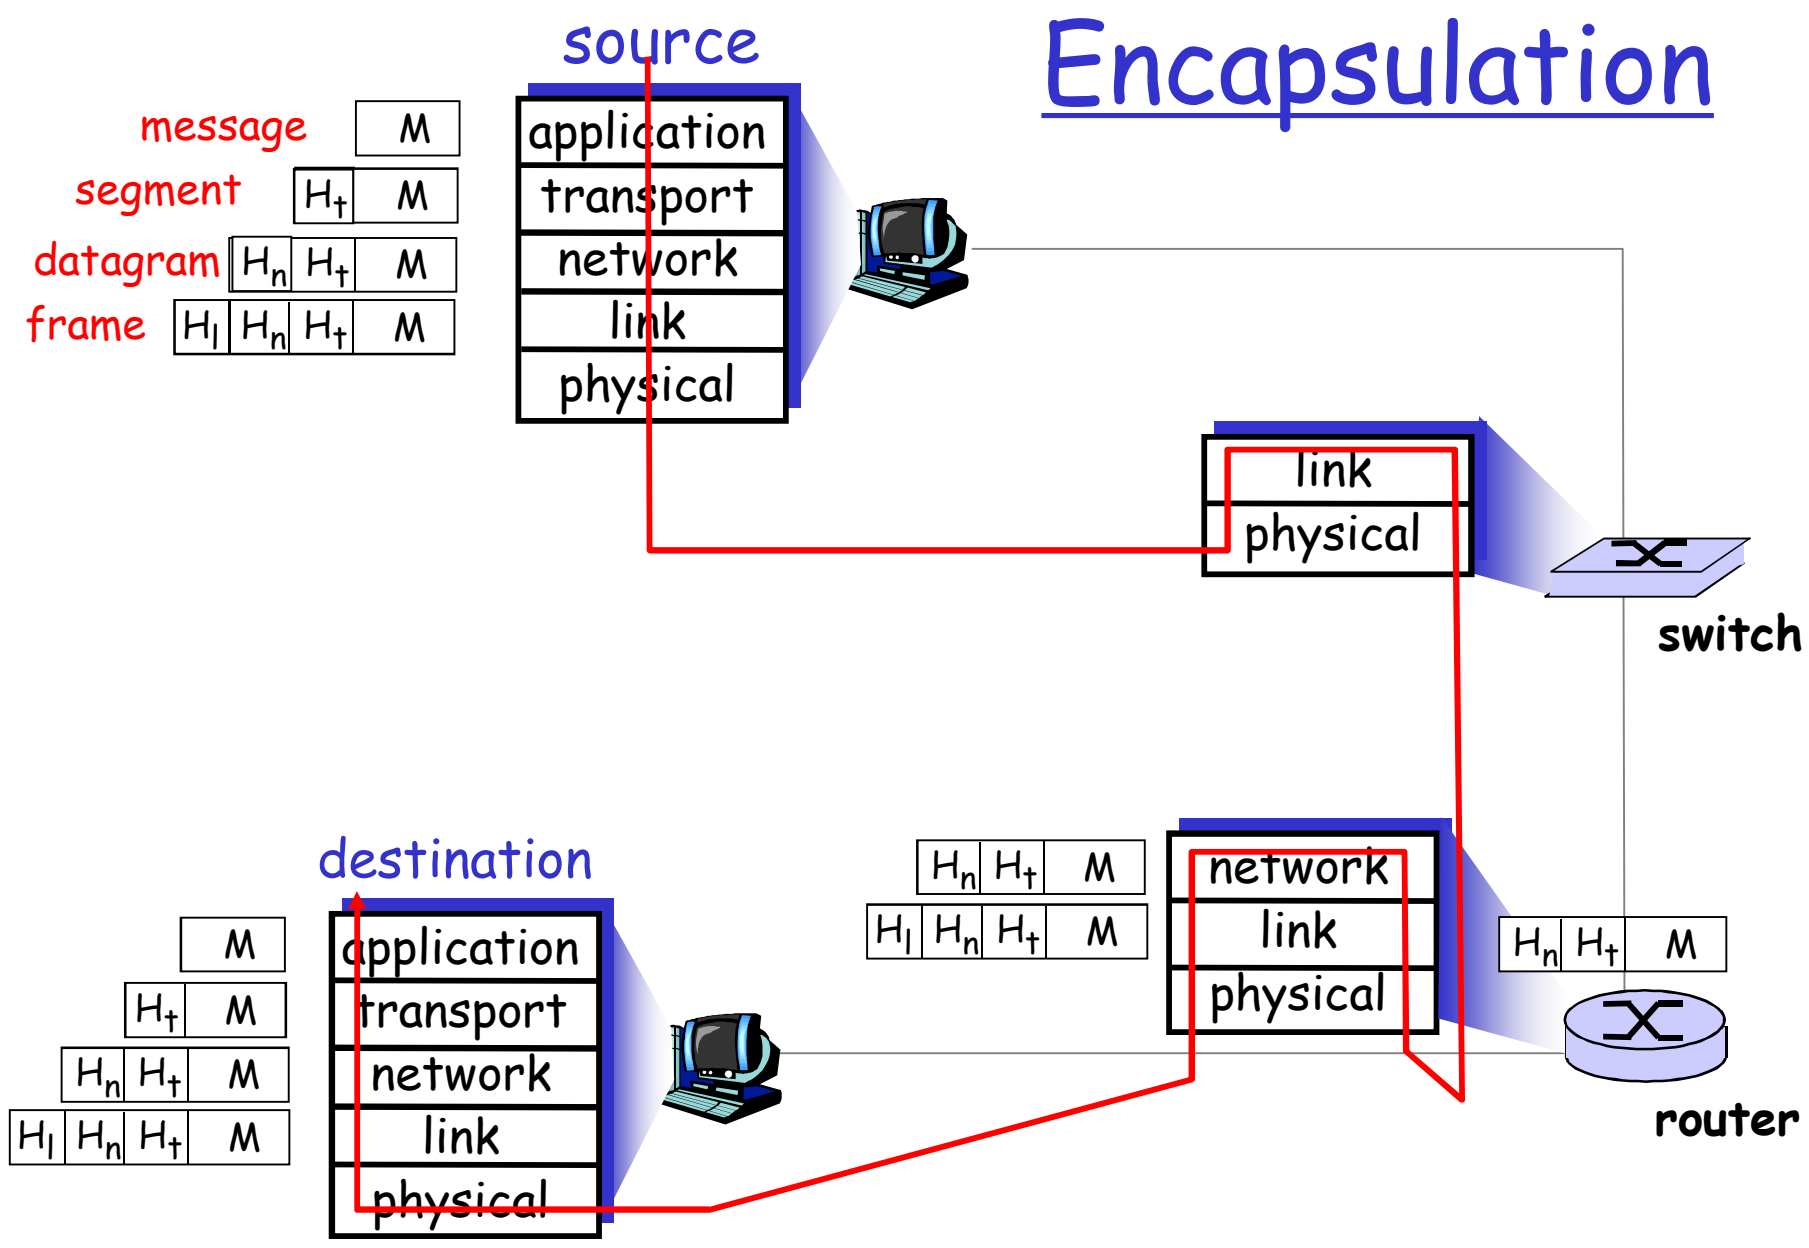

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
- end systems, access networks, links

1.3 Network core
- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks
1.5 Protocol layers, service models
1.6 Networks under attack: security
1.7 History

Network Security

- The field of network security is about:
  - how bad guys can attack computer networks
  - how we can defend networks against attacks
  - how to design architectures that are immune to attacks
- Internet not originally designed with (much) security in mind
  - *original vision:* "a group of mutually trusting users attached to a transparent network" ☺
  - Internet protocol designers playing "catch-up"
  - Security considerations in all layers!

Bad guys can put malware into hosts via Internet

- Malware can get in host from a virus, worm, or trojan horse.
  - *virus:* self-replicating infection by receiving/executing object (e.g., e-mail attachment)
  - *worm:* self-replicating infection by passively receiving object that gets itself executed
- Spyware malware can record keystrokes, web sites visited, upload info to collection site.
- Infected host can be enrolled in a botnet, used for spam and DDoS attacks.
- Malware is often self-replicating: from an infected host, seeks entry into other hosts

Bad guys can put malware into hosts via Internet

- Trojan horse
  - Hidden part of some otherwise useful software
  - Today often on a Web page (Active-X, plugin)
- Virus
  - infection by receiving object (e.g., e-mail attachment), actively executing
  - self-replicating: propagate itself to other hosts, users
- Worm:
  - infection by passively receiving object that gets itself executed
  - self- replicating: propagates to other hosts, users

Bad guys can attack servers and network infrastructure

- Denial of service (DoS): attackers make resources (server, bandwidth) unavailable to legitimate traffic by overwhelming resource with bogus traffic

1. select target
2. break into hosts around the network (see botnet)
3. send packets toward target from compromised hosts

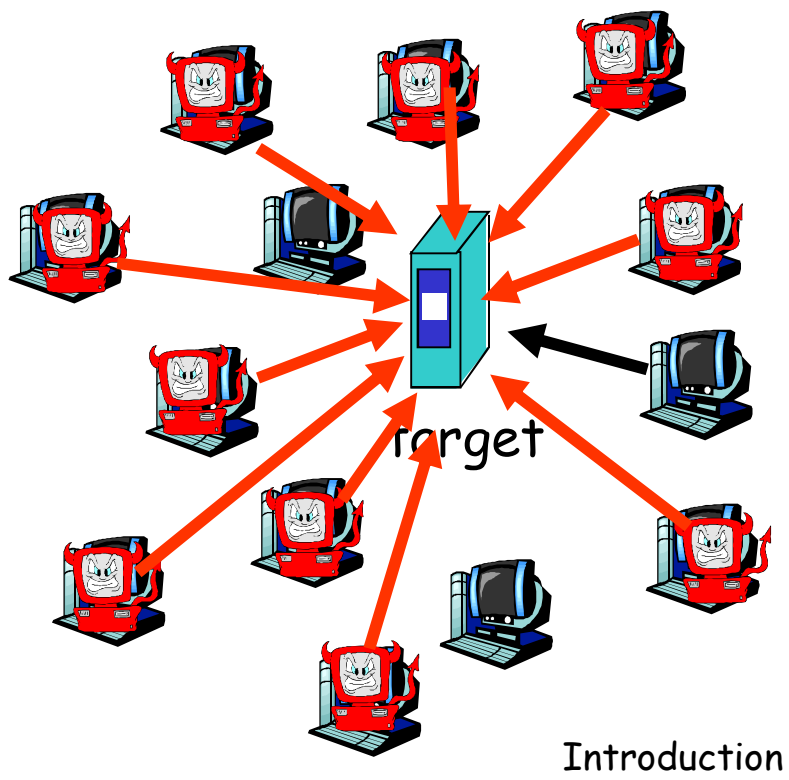

The bad guys can sniff packets

Packet sniffing:

- broadcast media (shared Ethernet, wireless)
- promiscuous network interface reads/records all packets (e.g., including passwords!) passing by

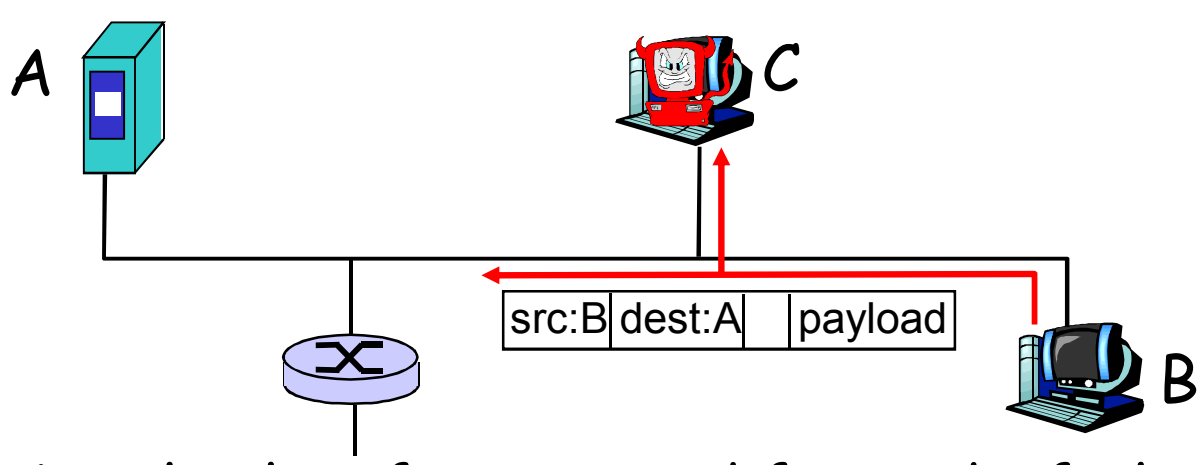

- Wireshark software used for end-of-chapter labs is a (free) packet-sniffer

The bad guys can use false source addresses

- *IP spoofing:* send packet with false source address

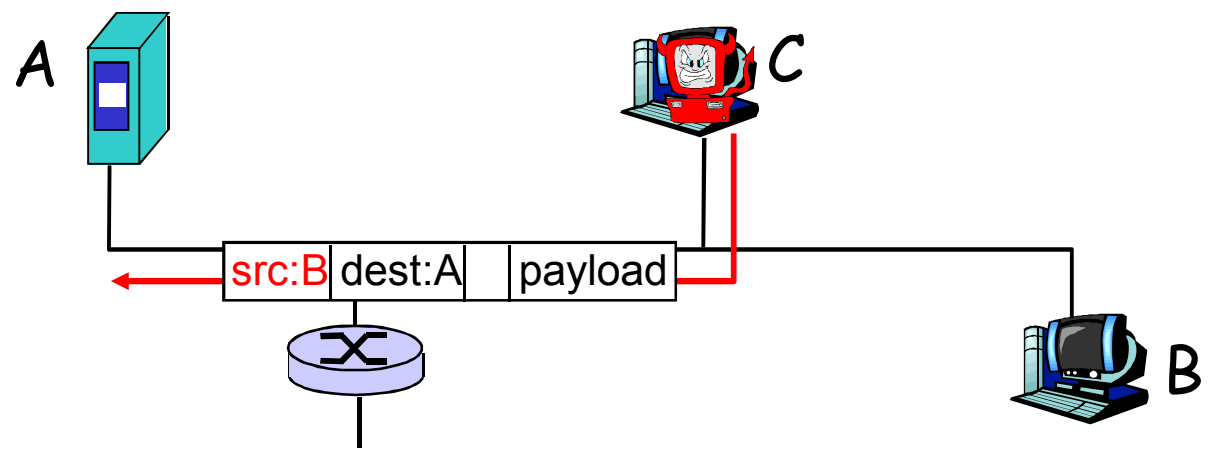

… lots more on security (throughout, Chapter 8)

The bad guys can record and playback

- *record-and-playback*: sniff sensitive info (e.g., password), and use later
  - password holder *is* that user from system point of view

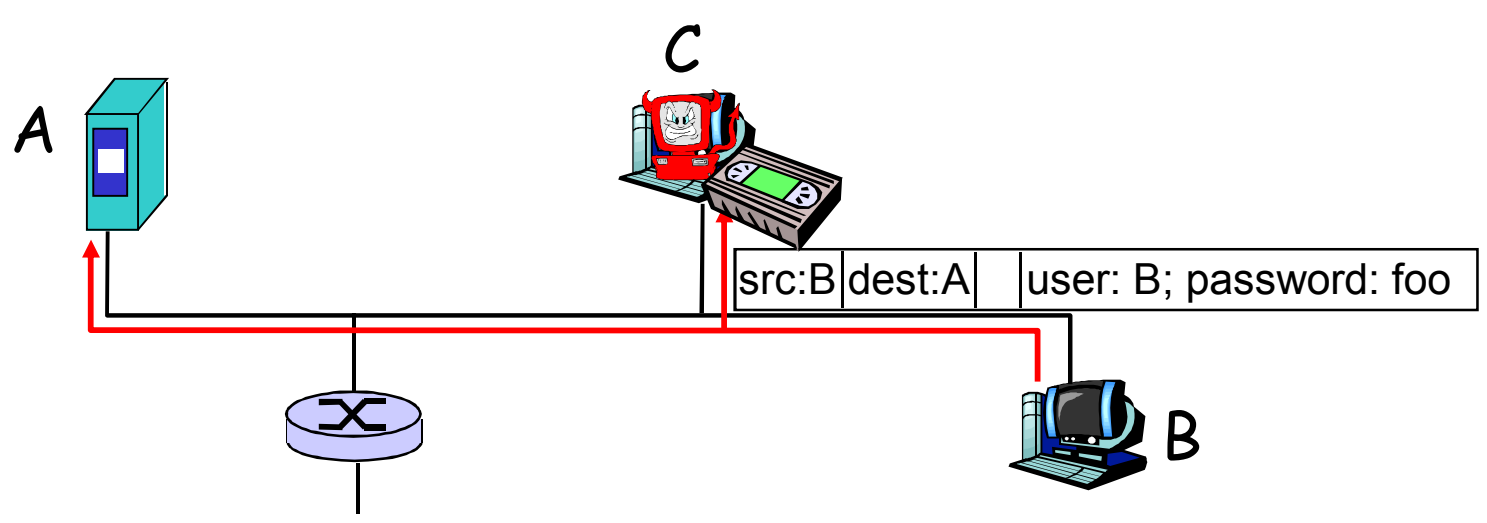

Chapter 1: roadmap

1.1 What *is* the Internet?
1.2 Network edge
- end systems, access networks, links

1.3 Network core
- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks
1.5 Protocol layers, service models
1.6 Networks under attack: security
1.7 History

Internet History

1961-1972: Early packet-switching principles

- 1961: Kleinrock - queueing theory shows effectiveness of packet-switching
- 1964: Baran - packet-switching in military nets
- 1967: ARPAnet conceived by Advanced Research Projects Agency
- 1969: first ARPAnet node operational
- 1972:
  - ARPAnet public demonstration
  - NCP (Network Control Protocol) first host-host protocol
  - first e-mail program
  - ARPAnet has 15 nodes



THE ARPA NETWORK

Internet History

1972-1980: Internetworking, new and proprietary nets

- 1970: ALOHAnet satellite network in Hawaii
- 1974: Cerf and Kahn - architecture for interconnecting networks
- 1976: Ethernet at Xerox PARC
- ate70's: proprietary architectures: DECnet, SNA, XNA
- late 70's: switching fixed length packets (ATM precursor)
- 1979: ARPAnet has 200 nodes

Cerf and Kahn's internetworking principles:
- minimalism, autonomy - no internal changes required to interconnect networks
- best effort service model
- stateless routers
- decentralized control

define today's Internet architecture

Internet History

1980-1990: new protocols, a proliferation of networks

- 1983: deployment of TCP/IP
- 1982: smtp e-mail protocol defined
- 1983: DNS defined for name-to-IP-address translation
- 1985: ftp protocol defined
- 1988: TCP congestion control
- new national networks: Csnet, BITnet, NSFnet, Minitel
- 100,000 hosts connected to confederation of networks

Internet History

1990, 2000's: commercialization, the Web, new apps

- Early 1990's: ARPAnet decommissioned
- 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- early 1990s: Web
  - hypertext [Bush 1945, Nelson 1960's]
  - HTML, HTTP: Berners-Lee
  - 1994: Mosaic, later Netscape
  - late 1990's: commercialization of the Web

Late 1990's – 2000's:
- more killer apps: instant messaging, P2P file sharing
- network security to forefront
- est. 50 million host, 100 million+ users
- backbone links running at Gbps

Internet History

2005~present:
- ~750 million hosts
  - Smartphones and tablets
- Aggressive deployment of broadband access
- Increasing ubiquity of high-speed wireless access
- Emergence of online social networks:
  - Facebook: soon few billion users
- Service providers (Google, Microsoft) create their own networks
  - Bypass Internet, providing "instantaneous" access to search, email, etc.
- E-commerce, universities, enterprises running their services in "cloud" (eg, Amazon EC2)

Introduction: Summary

Covered a "ton" of material!

- Internet overview
- what's a protocol?
- network edge, core, access network
  - packet-switching versus circuit-switching
  - Internet structure
- performance: loss, delay, throughput
- layering, service models
- security
- history

You now have:

- context, overview, "feel" of networking
- more depth, detail *to follow!*