

DESCRIPTION [more...](#)

Product features:

Stable performance with multiple working modes available

2 input voltages, DC 6-32V/DC 6-40V/, 4 step-down DC5V/9V/12V/24V

Low ripple design, no false current mark

This module can achieve considerable parameters and functions in a very small volume.

The module size is very small, and the heat dissipation area is limited. It is a normal phenomenon for high-power output to generate heat. We use high-quality materials, so there is no need to worry about heat affecting the lifespan.

Style 1: DC 6-32V

Voltage: maximum DC 32V input

Current: Maximum 3A current output

Quiescent current: 0.1mA Quiescent current

Conversion efficiency: up to 94% conversion efficiency

Frequency: 500KHZ Low ripple frequency

Short circuit protection: Output short circuit protection

Temperature: -40 ° C to +85 ° C

Process: Half hole process

Size: Plate welding small hole diameter 1.2MM,

Outer half hole space 1.6MM

Soldering pad 2.2X3MM

Style 2: DC 6-40V

Voltage: maximum DC 40V input

Current: Maximum 3A current output

Quiescent current: 0.1mA Quiescent current

Conversion efficiency: Up to 95% conversion efficiency

Frequency: 500KHZ Low ripple frequency

Short circuit protection: Output short circuit protection

Temperature: -40 ° C to +85 ° C

Process: Half hole process

Size: Plate welding small hole diameter 1.2MM,

Outer half hole space 1.6MM

Soldering pad 2.2X3MM

Product Description:

The original chip is used, with a maximum output of 3A, but can continuously output current far superior to other chips in the same industry. Without heat dissipation, 24V can continuously output 2A current (48W). If the board is attached to the bottom plate to increase heat dissipation, it can continuously output 3A. Similarly, similar to a module, the pressure difference required for voltage reduction is also relatively low. The efficiency should also be higher.

Module terminal definition:

IN+: Module power supply 6-32V input positive pole (input must be greater than output voltage)

IN -: Module input negative (output negative)

OUT+: module output positive pole

OUT -: Module output negative (input negative)

Precautions for use:

◆ The input of the product should be greater than the output voltage, and it is best to maintain a voltage difference of more than 1V. The input should not be connected in reverse, and the circuit should be connected in reverse.

It is best to disconnect the power supply when wiring, otherwise when the voltage is high, it is easy to spark, which will have a certain risk of hitting the chip and breaking it down.

The wiring should not be too thin to ensure that the wire can withstand the corresponding current.

◆ Protect the inductive load to avoid excessive reverse electromotive force exceeding the range of the chip.

The higher the power used by the module, the closer the current is to the maximum current. The heat will increase, so pay attention to heat dissipation when using.

When encountering problems during use, contact customer service must cooperate with them to provide wiring pictures, videos, etc. It is not acceptable to only provide text information.

Package included:

1 x 3A Mini DC-DC Buck Step Down Converter Board Module 6V-40V to 5V 9V 12V 24V DC DC Voltage Regulator PCB Board Power Buck Module




40V/3A high efficiency power module

DC6-40Vdollar

5V/9V/12V/24V




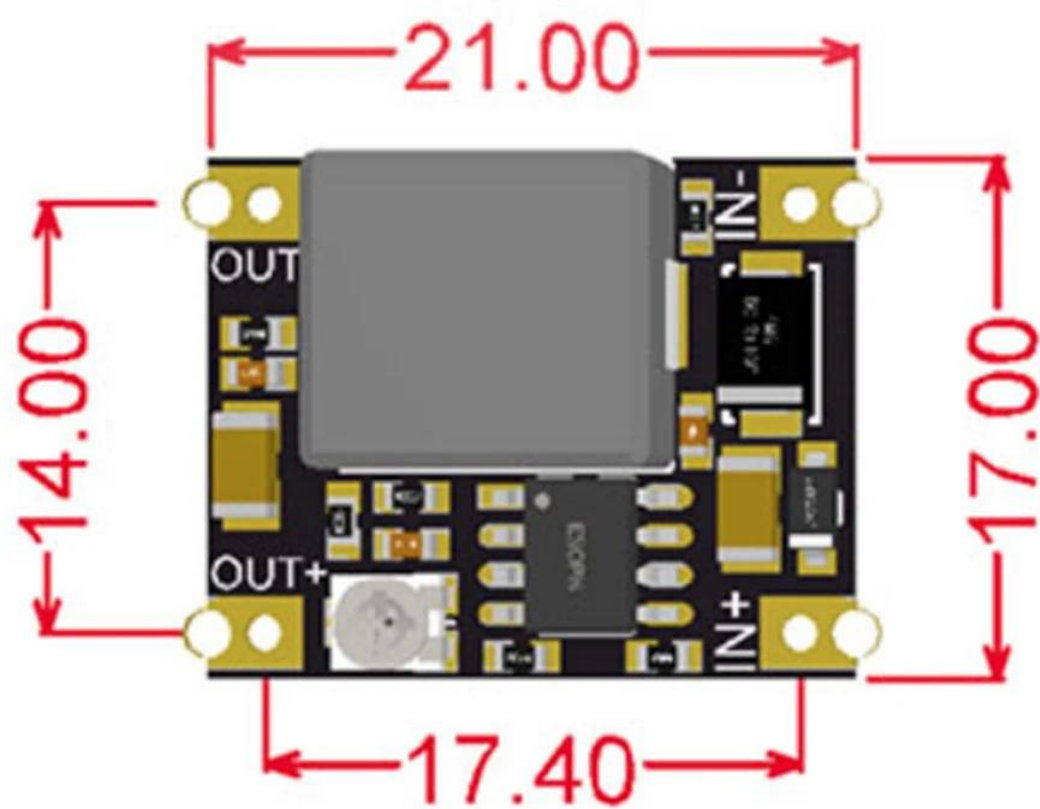


The board is 5.5MM thick





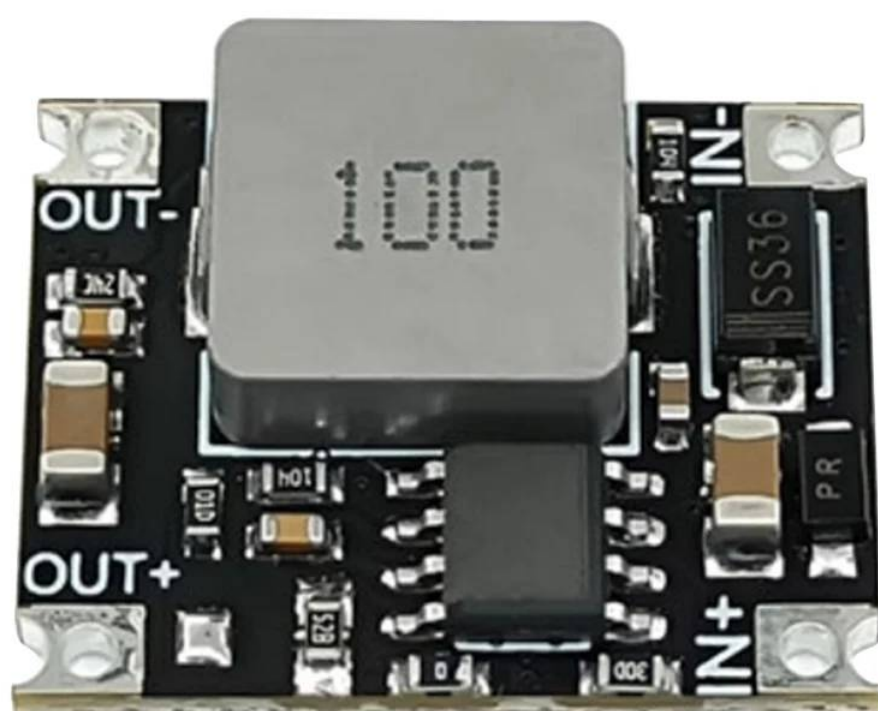

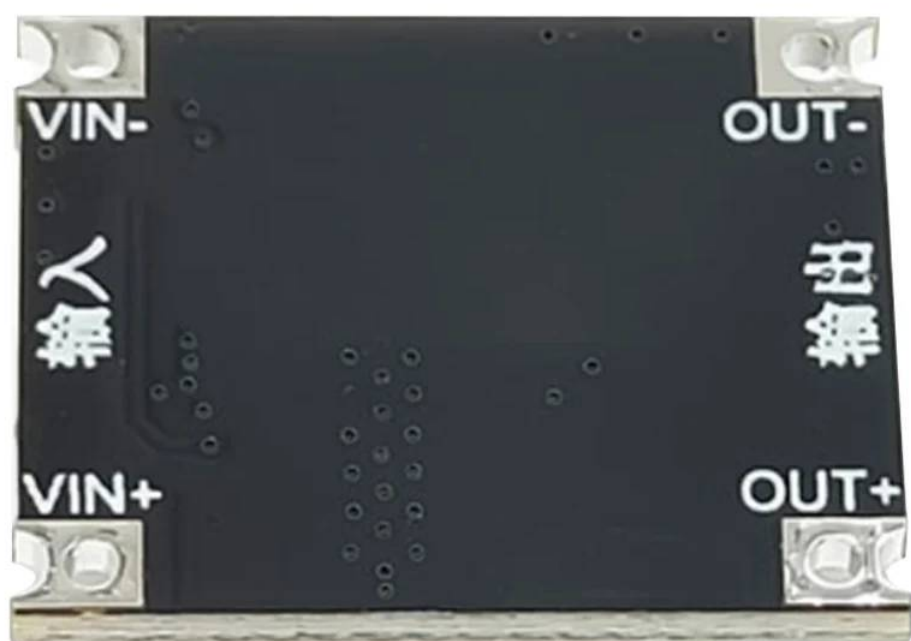




32V high efficiency and high power step-down module



- ◆ Maximum 32V input
- ◆ Maximum 3A current output
- ◆ 0.1mA static current
- ◆ Up to 94% conversion efficiency
- ◆ Low ripple at 500KHZ frequency
- ◆ Output short-circuit protection
- ◆ -40° C to +85° C
- ◆ Half-hole process

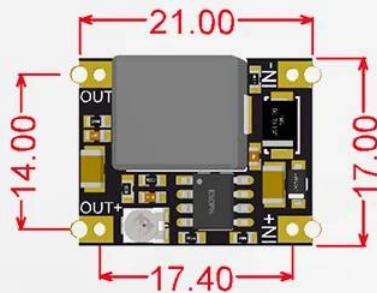

The board is 5.5MM thick

Using the original chip, the same 3A maximum output, but the continuous output current is much larger than the peer chip. In the case of no heat dissipation, 24V sustainable output 2A current (48W), if the board attached to the bottom plate to increase heat dissipation, can continue to 3A output. Similarly similar modules, the pressure difference required for depressurization is lower than that of counterparts. They are also more efficient than their peers.


IN+: Module power supply 6-32V input positive (input must be greater than output voltage)

IN- : Module input negative (pass output negative)


OUT+: Module output positive terminal

OUT- : Module output negative (pass input negative)

40V high efficiency and high power step-down module



- ◆ Maximum 40V input
- ◆ Maximum 3A current output
- ◆ 0.1mA static current
- ◆ Up to 95% conversion efficiency
- ◆ Low ripple at 500KHZ frequency
- ◆ Output short-circuit protection
- ◆ -40° C to +85° C
- ◆ Half-hole process

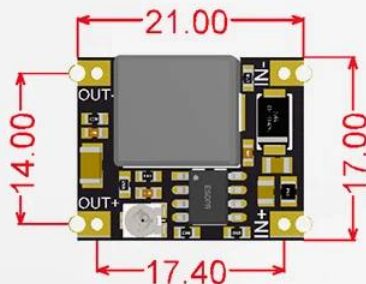

The board is 5.5MM thick

Using the original chip, the same 3A maximum output, but the continuous output current is much larger than the peer chip. In the case of no heat dissipation, 24V sustainable output 2A current (48W), if the board attached to the bottom plate to increase heat dissipation, can continue to 3A output. Similarly similar modules, the pressure difference required for depressurization is lower than that of counterparts. They are also more efficient than their peers.

IN+: Module power supply 6-40V input positive (input must be greater than output voltage)

IN- : Module input negative (pass output negative)

OUT+: Module output positive terminal

OUT- : Module output negative (pass input negative)