



LICOPTR P720

Indigenous LiDAR Drone

MINING • MOBILITY • URBAN • ENERGY • WATER • EMERGENCY

Multi-Sensor Intelligence for True 3D Reality Capture

LATRICS – BUILDING BETTER TOMORROW

45+

MIN. ENDURANCE

Foldable

DESIGN

All-Terrain

FLIGHT CAPABILITY



MADE IN INDIA



WHY LICOPTER P720



LONG ENDURANCE

Up to **40 minutes of flight time** with LiDAR payload, enabling greater data capture in a single mission.



STABLE ORIENTATION

Sensor fusion yaw control ensures stable flight, even in high electromagnetic interference environments.



EASY DEPLOYMENT

Terrain Desk Capture enables rapid deployment with user-friendly workflows and proven flight SOPs.



ADVANCED SAFETY

Compact foldable design (**900mm to 450mm**) with an integrated detect-and-avoid system for enhanced safety.



INDIGENOUS LIDAR

Indigenous LiDAR seamlessly integrated with **IMU and GPS** for precise and reliable data acquisition.



LIFETIME SUPPORT

Flexible multi-year support plans with **lifetime online assistance** for subscribed customers.

DRONE SPECS

TECHNICAL SPECIFICATIONS

PARAMETERS	LiDAR (Li P720)	61MP CAMERA	OBLIQUE (5-in-1 Camera)
Sensor / Scanner Type	905nm laser scanner, equivalent to 64-beam	Full-frame back-illuminated CMOS	5× APS-C CMOS (4 Oblique + 1 Nadir)
Built-in Camera Resolution	26 MP (RGB, Integrated)	61 MP (Effective)	130 MP (Combined, 5 Lenses)
Focal Length	15 mm (RGB Camera)	25 mm	25 mm / 35 mm
Field of View (FOV)	70° (Circular)	~82° Diagonal	Horz: 36° & Vert: 25°
Operating Temp Range	-20°C to 55°C	-10°C to 55°C	-10°C to 50°C
Data Acquisition Rate	720,000 Points/Sec (Triple Echo)	3 fps Continuous Shooting	5 Synchronized Cameras per Capture
Measuring Range	190 m @10% Reflectivity	~3 cm GSD @200 m (25mm lens)	~3 cm GSD @190 m
Measuring Accuracy	2 cm @20 m; ≤10 cm @110 m	Sub-cm/pixel achievable (lens/altitude dependent)	Better than 30 mm (typical, at rated GSD)
Positioning Method	Integrated GNSS/IMU (onboard)	External PPK Multi-band GNSS	External PPK Multi-band GNSS
Position Update Rate	200 Hz	100 Hz	100 Hz
Positioning Accuracy (PPK)	Pitch/Roll: 0.015°, Heading: 0.040°, Position < 5 cm	Horizontal 0.6 cm + 0.5 ppm, Vertical 1 cm + 1 ppm	Horizontal 0.6 cm + 0.5 ppm, Vertical 1 cm + 1 ppm
File Output	LAS Point Cloud + RGB Imagery	JPEG, RAW (14-bit), RAW+JPEG	JPEG (5 Camera Synchronized Set)
Max. Area Coverage	~371 Acres	~346 Acres	~247 Acres

PLATFORM COMPATIBILITY

LAS

GeoTIFF

OBJ / E57


Terrain Desk Capture delivering seamless missions through an advanced 11-inch Android interface.

APPLICATIONS & DEPLOYMENTS

The **LICOPTR P720** is engineered for demanding real-world deployments across critical infrastructure, resource mapping, and emergency response sectors.


MINING

Delivering precise stockpile analysis, resource estimation, and terrain intelligence to improve sustainable mining operations, safety, and environmental compliance

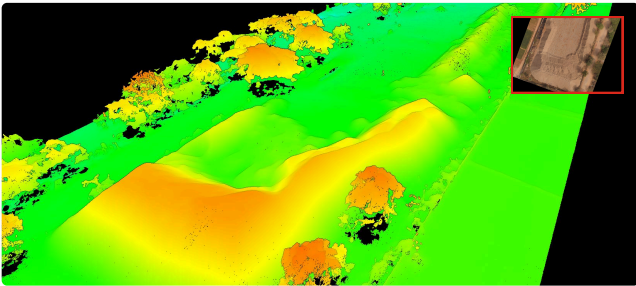

HIGHWAYS & RAILWAYS

Providing accurate corridor mapping, terrain modeling, and infrastructure monitoring to support efficient planning, and long-term maintenance

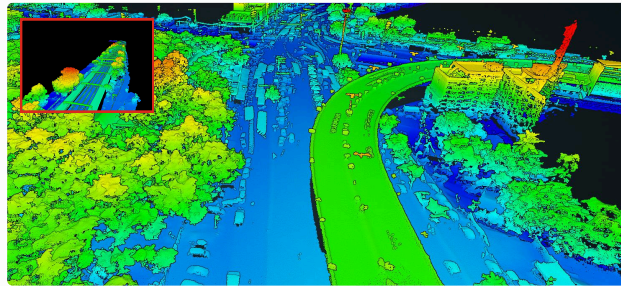


URBAN DEVELOPMENT

Enabling smarter urban planning with high-precision 3D mapping, infrastructure analysis, and spatial intelligence for development.




ENERGY & UTILITIES

Enhancing utility management through powerline inspections, thermal analysis, and renewable energy assessments to improve asset reliability

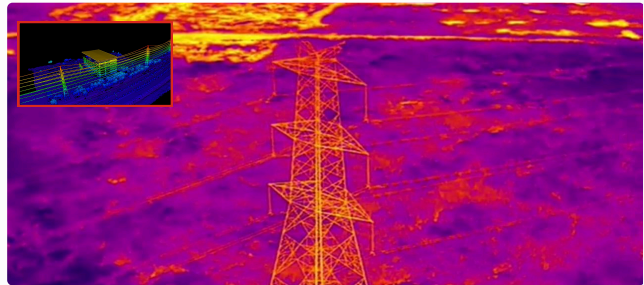

WATER RESOURCES

Supporting sustainable water management with detailed watershed mapping, flood prediction, & real-time monitoring for informed planning

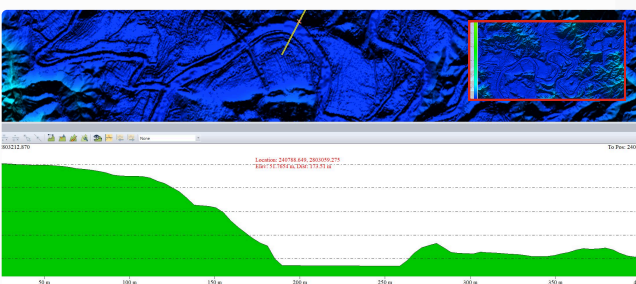


EMERGENCY SERVICES

Empowering disaster response with rapid damage assessment, real-time situational awareness, and actionable insights geospatial insights for faster recovery



LICOPTER P720 WORKFLOW

End-to-end aerial mapping workflow powered by LiDAR and high-resolution sensors for accurate, reliable geospatial intelligence.

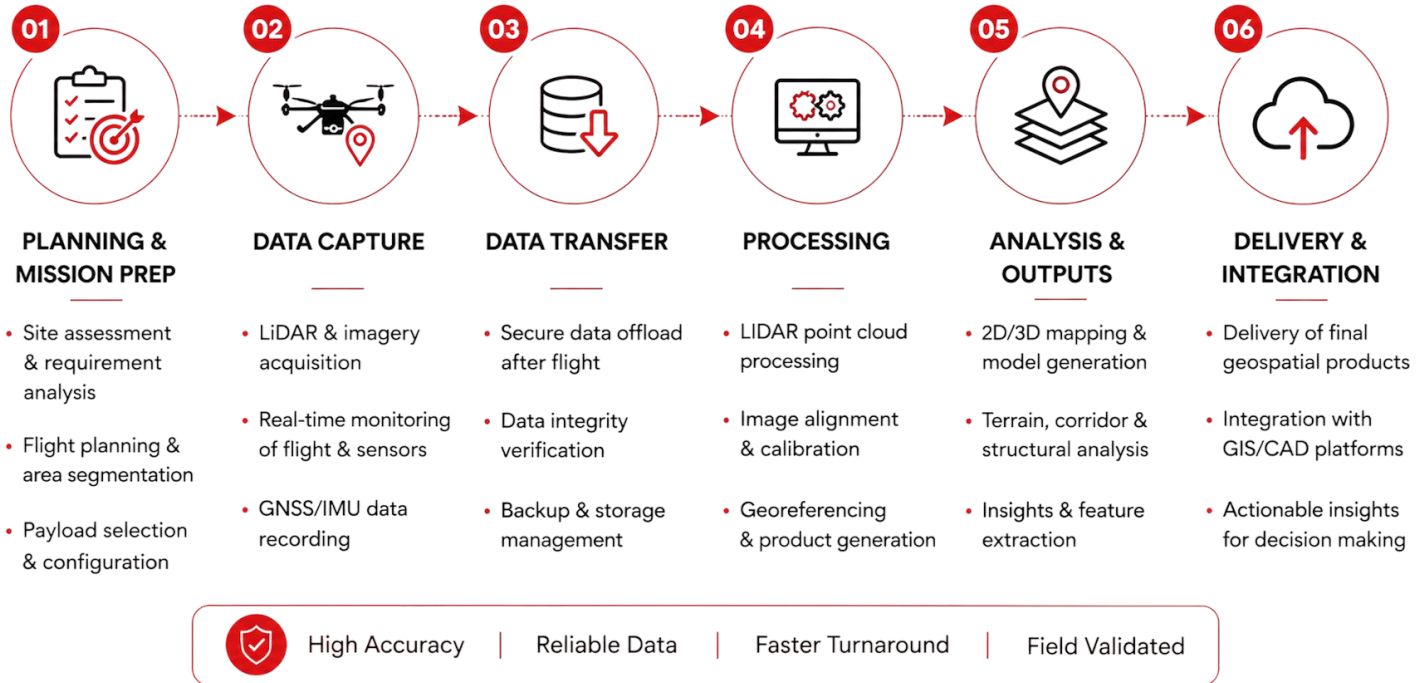

OUR ACHIEVEMENTS

