
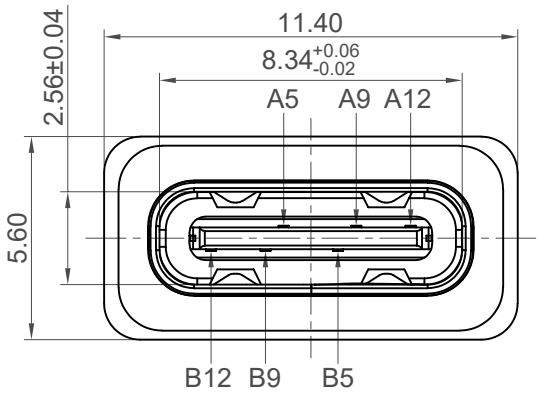


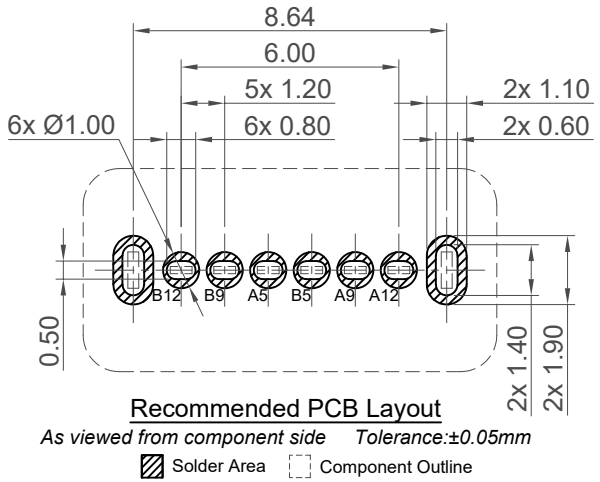


Recommended PCB Layout

As viewed from component side *Tolerance:±0.05mm*

Solder Area | Component Outline

Pin	Signal	Mating Sequence
A5	CC1	Second
A9	VBUS	First
A12	GND	First
B5	CC2	Second
B9	VBUS	First
B12	GND	First
SHELL		GND




Specifications


Material
- Insulator: LCP, UL 94V-0, Black
- Plastic Shell: PA9T, UL 94V-0, Black
- Contact: Copper Alloy
- Shell: Stainless Steel
- Mid Plate: Stainless Steel
- Gasket: Silicone Rubber, Part No.: USBTJ-04, Shore Hardness 60A
  (Gasket+Connector can be ordered separately or together as a KIT)


Plating
- Contact
  - Contact Area: Gold Flash
  - Solder Tails: 50µ" min. Tin
  - Underplating: 50µ" min. Nickel
- Shell: 30µ" min. Nickel
- Mid Plate: Clear

Electrical
- Current Rating: 3.00A collectively for VBUS pins
  4.25A collectively for GND pins
  1.25A for A5/B5 pin
- Voltage Rating: 48V DC
- Contact Resistance: 40mΩ max initial.
  50mΩ max after test
- Dielectric Withstanding Voltage: 100V AC
- Insulation Resistance 100MΩ min


Mechanical & Environmental
- Operating Temperature: -25°C to +85°C
- Mating Force: 5 to 20 N.
- Unmated Force: 6 to 20 N after test
- Durability: 20,000 cycles
- Ingress Protection Rating: IP67

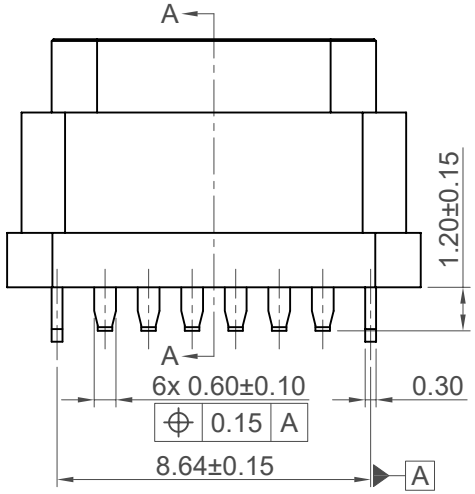

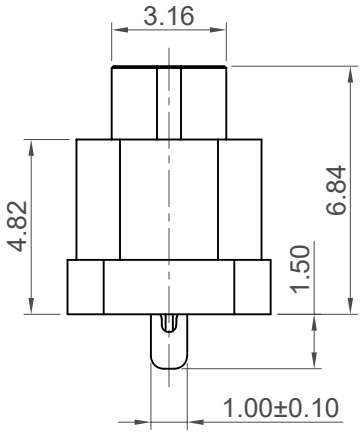

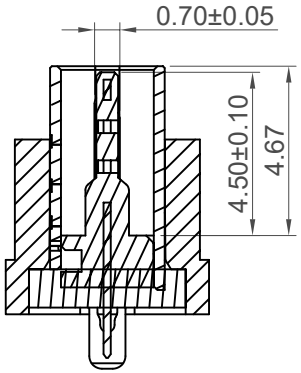

Section: A-A

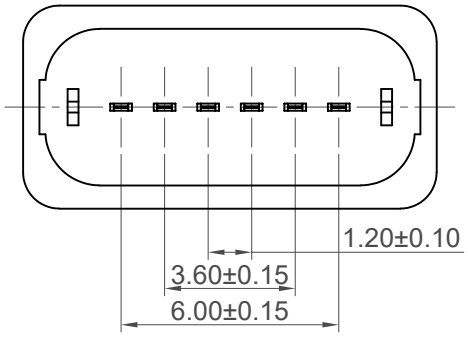

Ordering Grid

USB4750 – GF – C – XXX

Request Samples and Quotation

Contact Plating
GF = Gold Flash


Packing Options
C = Tape & Reel With Cap
(500pcs per reel)

Gasket Options
KIT = Includes Gasket: USBTJ-04
Blank = Connector Only (Without gasket)


Part Number	Product Description
USB4750	Type C Receptacle, Vertical, Top Mount, Through Hole, IP67, For Power Charging Only, 6Pin
Drawing Date: 19th December 2024	

By	KY	Tolerances (Except as Noted) Length	Angle	Units: Metric (mm)	RoHS COMPLIANT 2011/65/EU Deca-BDE	©	GCT www.gct.co
Detail	Drawing Release	X.X ± 0.30	±3°	3rd Angle Projection		This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	
Revision	A3	X.XX ± 0.25					
Date	23/07/26	X.XXX ± 0.10					


Not to Scale	Drawn By KY	Sheet No. 1/4

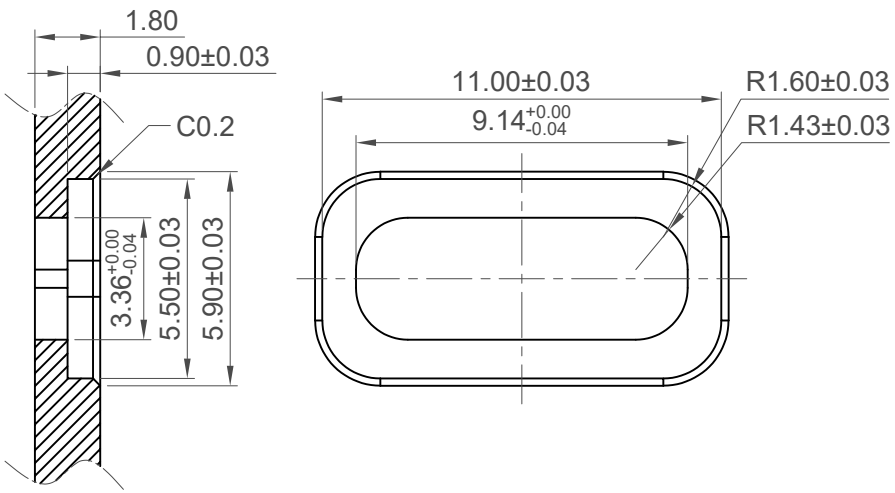


Recommended Panel Spec

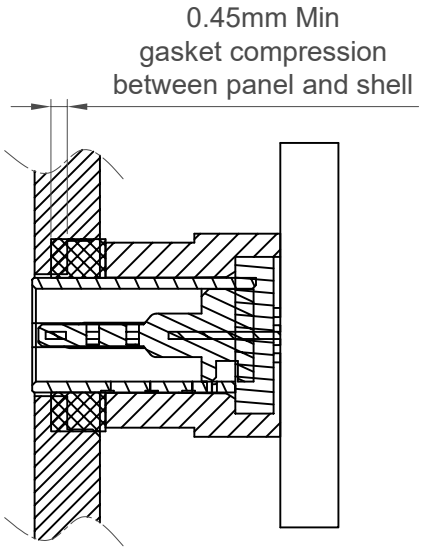


Suggest compression 30-40%
of gasket thickness

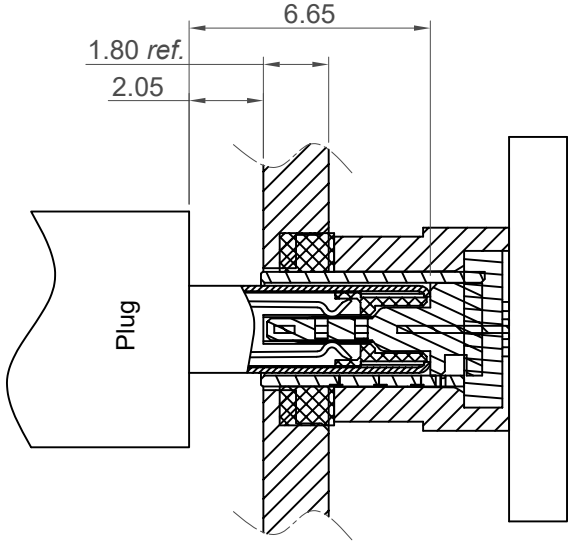

Plug and Receptacle Mating View

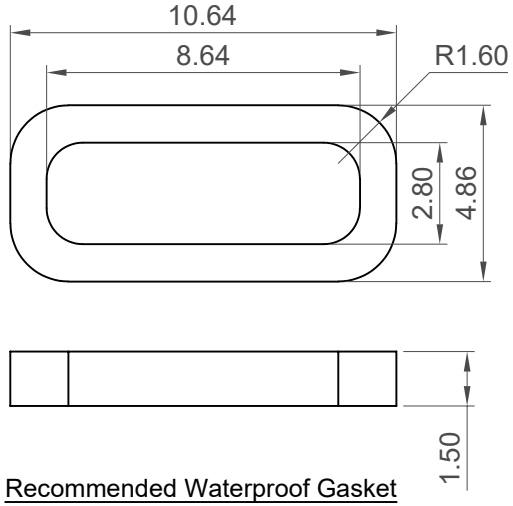


Recommended Waterproof Gasket
Gasket Part No.: USBTJ-04
(Gasket+Connector can be ordered separately or together as a KIT)
(See separate datasheet for specification)

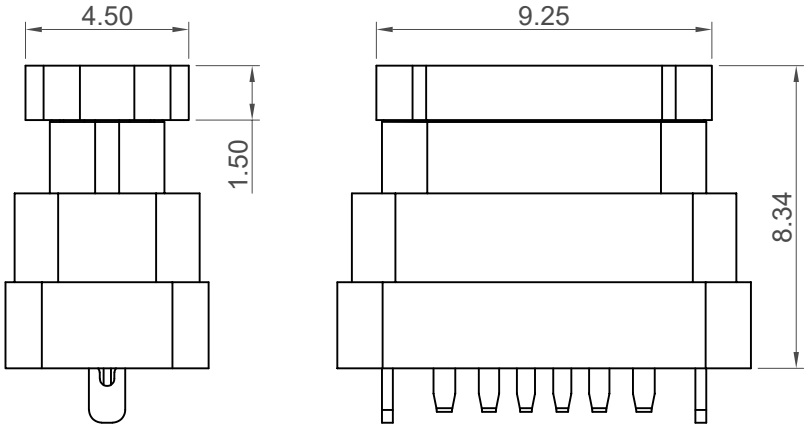


Cap Information

Part Number		Product Description					
USB4750		Type C Receptacle, Vertical, Top Mount, Through Hole, IP67, For Power Charging Only, 6Pin					
Drawing Date							
19th December 2024							
By	KY	Tolerances (Except as Noted)		Units: Metric (mm)	RoHS COMPLIANT 2011/65/EU Dece-BDE	© This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	GCT www.gct.co
Detail	Drawing Release	Length	Angle				
		X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.10	±3°	3rd Angle Projection			
Revision	A3						
Date	23/07/26						


Not to Scale	Drawn By KY	Sheet No. 2/4

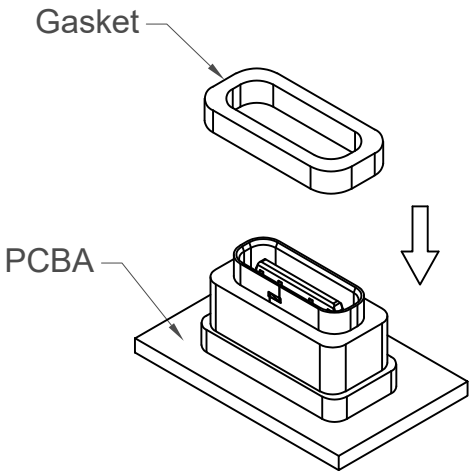

Step 1

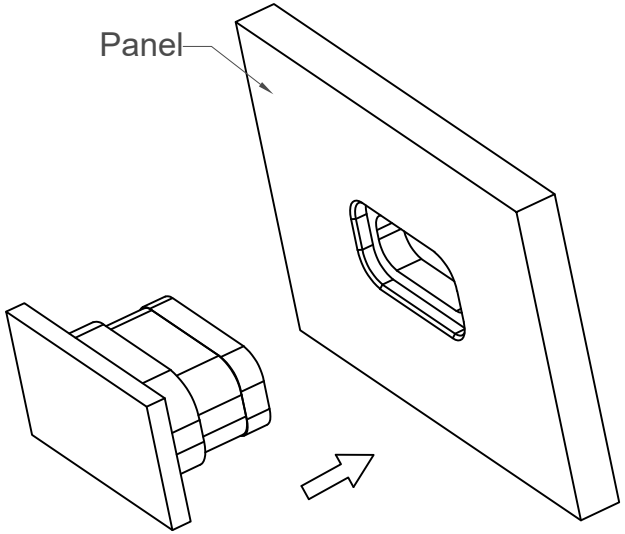


Step 2

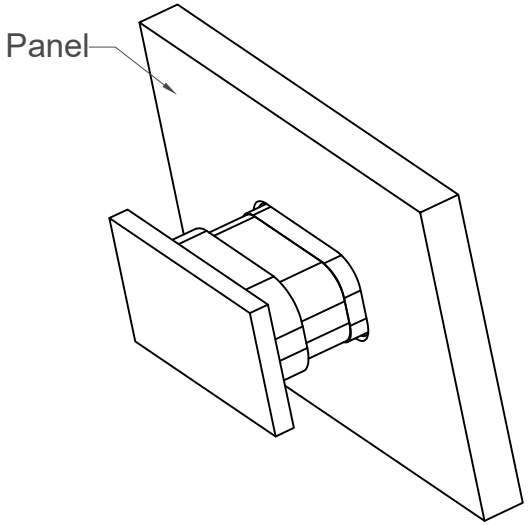


Step 3


Assembly instruction for Gasket set after Reflow
Available for Type C Receptacle Waterproof Series

Part Number: USB4750		Product Description: Type C Receptacle, Vertical, Top Mount, Through Hole, IP67, For Power Charging Only, 6Pin					
Drawing Date: 19th December 2024							
By	KY	Tolerances (Except as Noted) Length: -	Angle: -	Units: Metric (mm)	RoHS COMPLIANT 2011/65/EU Dece-BDE	This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	GCT www.gct.co
Detail	Drawing Release			3rd Angle Projection			Not to Scale / Drawn By KY / Sheet No. 3/4
Revision	A3						
Date	23/07/26						

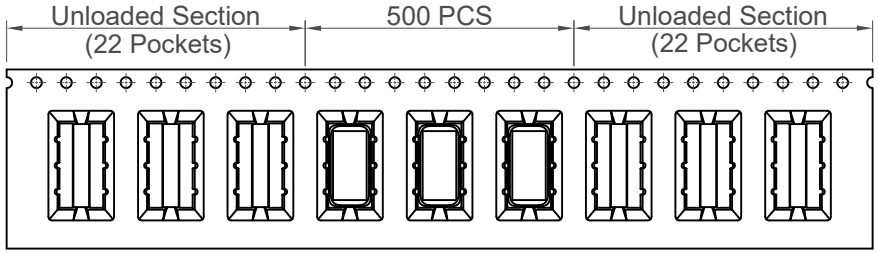



Direction of Unreeling

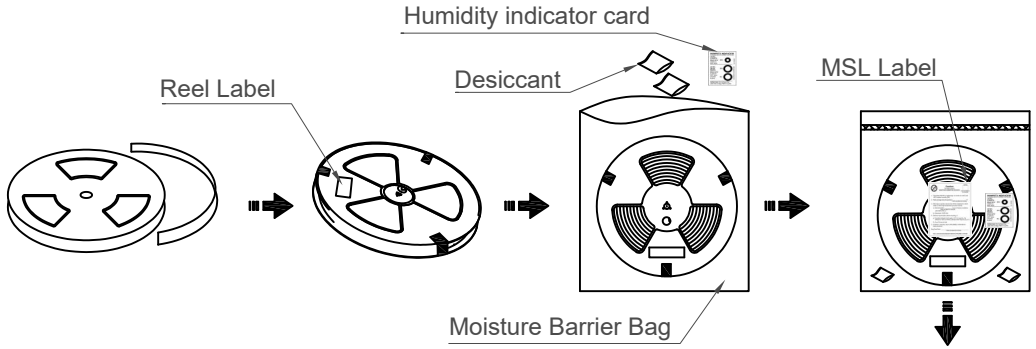


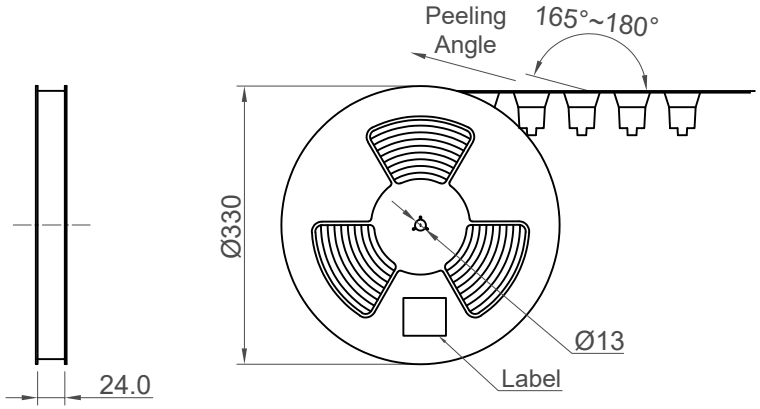


Direction of Unreeling

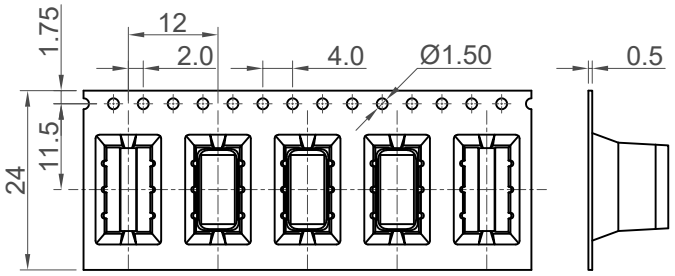






Humidity indicator card



MSL Label

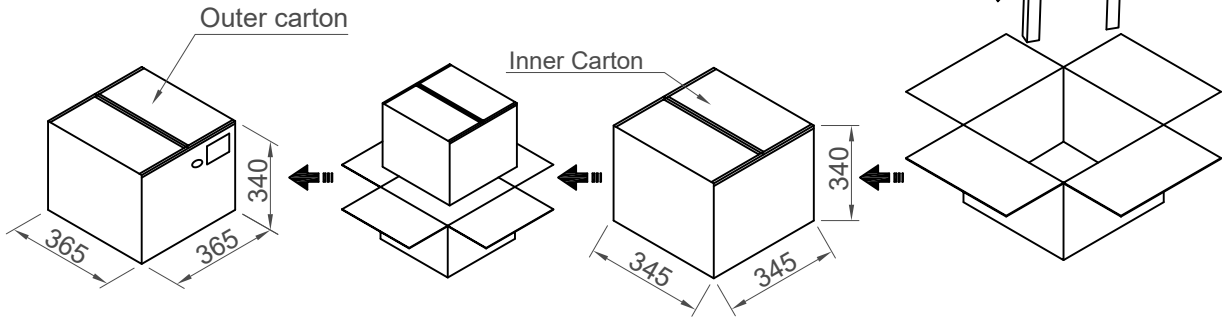

Pcs / Reel	Reels / Carton	Total Quantity
500	10	5,000 pcs

Part Number: USB4750		Product Description: Type C Receptacle, Vertical, Top Mount, Through Hole, IP67, For Power Charging Only, 6Pin				GCT www.gct.co
Drawing Date: 19th December 2024						
By	KY	Tolerances (Except as Noted) Length	Angle	Units: Metric (mm)	RoHS COMPLIANT 2011/65/EU Deca-BDE	© This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE
Detail	Drawing Release	-	-	3rd Angle Projection		Not to Scale / Drawn By KY / Sheet No. 4/4
Revision	A3					
Date	23/07/26					