

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

JAN ,2007.

© COPYRIGHT 2007 By -

ALL RIGHTS RESERVED.

LOC
JDIST
/

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN





APVD

- SEE SHEET 1

-

-

-

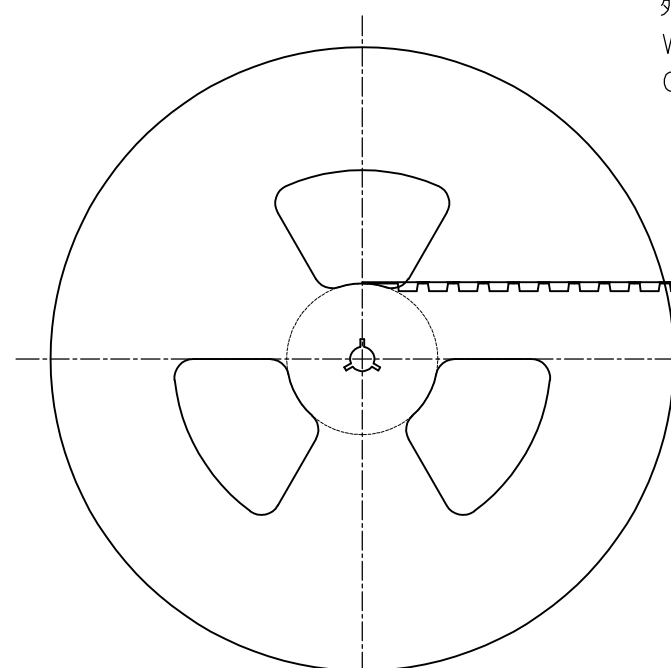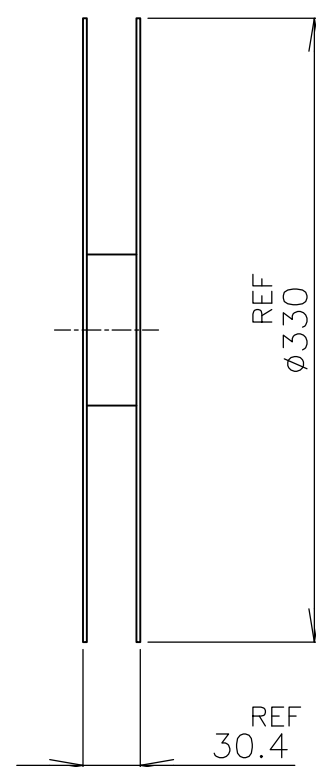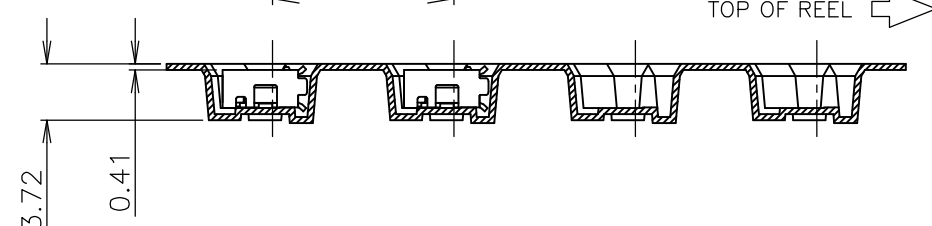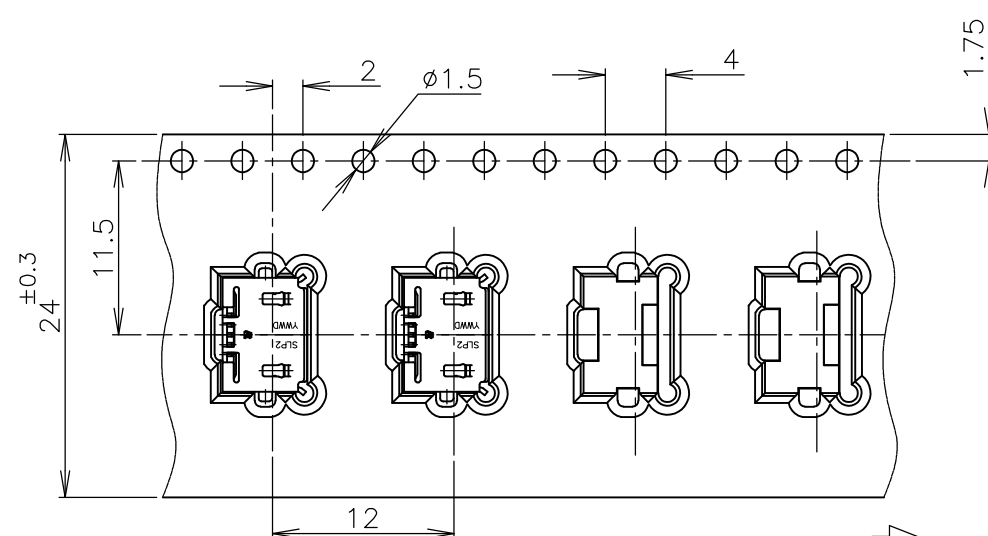

カバーテープリーダー部

外周1巻

WIDE COVER TAPE AROUND
OUT PERIPHERY 1 TURN

剥離強度 0.1-1.3N MAX(300±10mm/min)


PEELING STRENGTH

剥離強度 165~180°

PEELING ANGLE

引き出し方向
TOP OF REEL1000個/リール
1000EA/REELHOLES
8穴空 部
WITHOUT CHARGE
300mm程度
APPROX製品装填部
WITH PRODUCT CHARGE空 部
WITHOUT CHARGE
600mm程度
APPROX

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -MATERIAL
材料FINISH
仕上

DWN

CHK

APVD

PRODUCT SPEC
製品規格APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

STE

TE Connectivity

NAME
名称MICRO USB
RECEPTACLE STANDARD TYPE AB
ASSY

SIZE

CAGE CODE

DRAWING NO
番号

RESTRICTED TO

A300779

C-1981584

SCALE
尺度 2:1SHEET
2 OF 2REV
D2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1981584-1](#)