




## Refrigerador de Aceite/Aire Air/Oil Heat Echangers


(Equipo Autonomo con Motor Antiexplosivo / Independement Equipement with Antexplosive Motor)


MBP-350

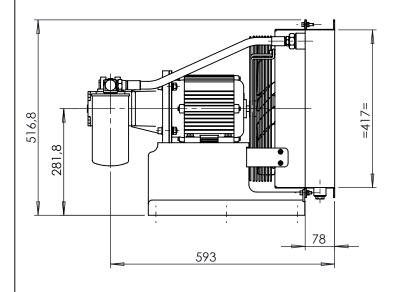



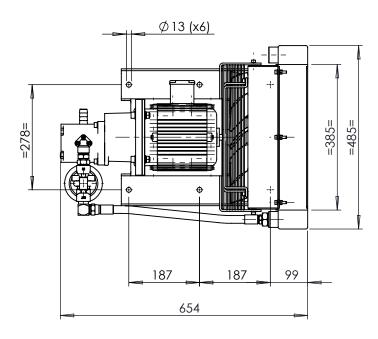





**STANDARD** 

WITH OUT OIL FILTER

\* RPM Motor 1500 - RPM Engine 1500









## **Datos Técnicos / Technical Information**

Modelo Model	Caudal bomba Oil pump flow	Peso Weight	Voltaje Voltage	Corriente Current	Potencia Power	Caudal aire Air flow	$\emptyset$ Ventilador Fan $\emptyset$
	(L/min)	(kg)	(V)	(A)	(Kw)	(m³/min)	(mm)
14067	28.5	43	380	3.70	1.5	57.15	350

Rendimiento Performance	Perdida de carga Presure drop		
(Kw/°C)	(bar)		
0.30	0.20		

Corrección de Viscosidad - Viscosity Correction Aceite - Oil: ISO VG @ 40° C 22 32 |46 | Multiplicar por - Multiply for: 0,7 0,9 1

150