
KIANA BONOLLO

SEWING PATTERN

SQUARE NECK V-WAIST DRESS

Size (00-14U.S.)
Difficulty Rating: Beginner/Intermediate



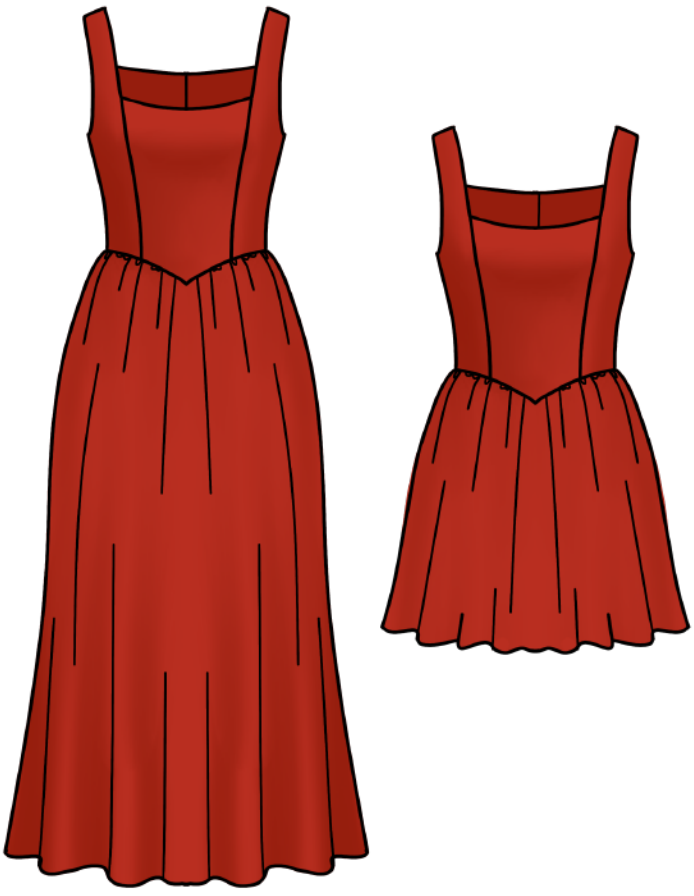



SUPPLIES

Mini and Midi Length Options

-FABRIC: MIDI: SHELL: 5 Yards (4.6 m) of at least 48" (1.22 m) Wide Fabric LINING: 3 3/4 Yards (3.43 m) of at least 48" (1.22 m) Wide Fabric MINI: SHELL: 2 7/8 Yards (2.63 m) of at least 48" (1.22 m) Wide Fabric LINING: 2 1/4 Yards (2.06 m) of at least 48" (1.22 m) Wide Fabric	See below for the exact fabric used in the examples.
-Matching Thread	https://amzn.to/44ERwTh
-20-22" (51-58 cm) Invisible Zipper	https://amzn.to/3VlMon6
-1 1/2 Yards (1.4 m) of **1/4"** (6.35 mm)Wide Double Fold Bias Tape	https://amzn.to/3X5cjzh
-Scissors	https://amzn.to/3rifm9t
-Pins	https://amzn.to/3Fenawa
-Ruler	https://amzn.to/3UDzuM3
-Sewing Machine	https://amzn.to/3UYDTJI
-Serger	https://amzn.to/3uNZFFG
*For finishing raw edges. If you do not have a serger, try a zig zag stitch on your home sewing machine.	*links are affiliate links

FABRIC SUGGESTIONS

SHELL: Light to medium weight opaque fabric with little to no stretch, such as linen. Midi example is sewn with a Linen Look Fabric Solid. Mini example is sewn with Stretch Denim.
Exact fabric used (MIDI): https://go.magik.ly/ml/22sa4/
Exact fabric used (MINI): https://go.magik.ly/ml/22sab/

LINING: Light to medium weight fabric with little to no stretch, such as cotton. Both examples are sewn with plain cotton.
Exact fabric used (MIDI): https://go.magik.ly/ml/23m4a/
Exact fabric used (MINI): https://go.magik.ly/ml/1ql18/

HEIGHT INFORMATION

There are skirt cut lines indicated for both standard heights and TALL heights for mini and midi lengths on the skirt shell and lining. Cut on the line that corresponds with the style and height you wish to create.

FABRIC WARNING

Important information regarding the grain of your fabric:

Because the skirt pieces are so large, you will have to cut them out of the fabric on the crosswise grain. The bodice and straps of this dress are also cut on the crosswise grain (as indicated by the grainlines on your pattern pieces). Please refer to the suggested cutting layout on the previous pages to see how both the bodice and skirt are cut crosswise. If your material is wide enough, you may choose to cut the skirt and bodice on the lengthwise grain.

***Take this into consideration if you are using a patterned fabric, as this could impact your design.

Printing & Pattern Assembly

Print out at 100% scale on your home printer. Use the scale provided to double check printing has been done correctly. Check out pdfplotting.com for inexpensive large format pattern printing. If printing out on your home printer, line up the edges of the sheets of paper and tape together. Do NOT overlap or trim down sheets of paper. Make sure you are using the print file that corresponds with your paper size (Ex. Letter Size File with Letter Size Paper). IMPORTANT: To reduce paper waste, the print pages for the mini and midi lengths have been separated for Letter and A4 size print files. Refer to the information provided on the first page of your print file to determine which pages to print for your desired length.

Cutting

Cut on the line that corresponds with your desired size. 1/2" (12.7 mm) seam allowance has already been included in the pattern unless otherwise stated.

IMPORTANT SEWING INFORMATION

1) Seam allowance is included. Seam allowance is 1/2" (12.7mm) unless otherwise stated. Recognize that this means the length of some raw edges will not match up. However, it is important to make sure seam lengths match where you stitch.

2) It is always smart to create a prototype when using a commercial pattern to make any personal adjustments necessary.

CHOOSE YOUR SIZE

For reference, the model on the previouse page is wearing a US Size 0.

BODY MEASUREMENTS

	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM
SIZE	00		0		2		4		6		8		10		12		14	
BUST	30	76.2	31	78.7	32	81.3	33	83.8	34	86.4	35	88.9	36	91.4	38	96.5	40	101.6
WAIST	24	60.9	25	63.5	26	66	27	68.6	28	71.1	29	73.7	30	76.2	32	81.3	34	86.4
HIPS	35	88.9	36	91.4	37	94	38	96.5	39	99.1	40	101.6	41	106.7	43	109.2	44	111.8

SIZE CONVERSIONS

US	00	0	2	4	6	8	10	12	14
EU	30	32	34	36	38	40	42	44	46
UK	2	4	6	8	10	12	14	16	18
AU	2	4	6	8	10	12	14	16	18

GARMENT MEASUREMENTS

	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM
SIZE	00		0		2		4		6		8		10		12		14	
BUST	30.3	77	31.3	79.5	32.3	82	33.3	84.6	34.3	87.1	35.3	89.7	36.3	92.2	38.3	97.3	40.3	102.4
WAIST	24	60.9	25	63.5	26	66	27	68.6	28	71.1	29	73.7	30	76.2	32	81.3	34	86.4
HIPS	45.4	115.2	46.4	117.7	47.4	120.3	48.4	122.8	49.4	125.4	50.4	127.9	51.4	130.4	53.4	135.5	55.4	140.6

SIZES

U.S. Sizing

SIZE 00

SIZE 0

SIZE 2

SIZE 4

SIZE 6

SIZE 8

SIZE 10


SIZE 12

SIZE 14

SUGGESTED CUTTING LAYOUT

MIDI LENGTH

SHELL: 5 Yards (4.6 m) of at least 48” (1.22 m) Wide Fabric

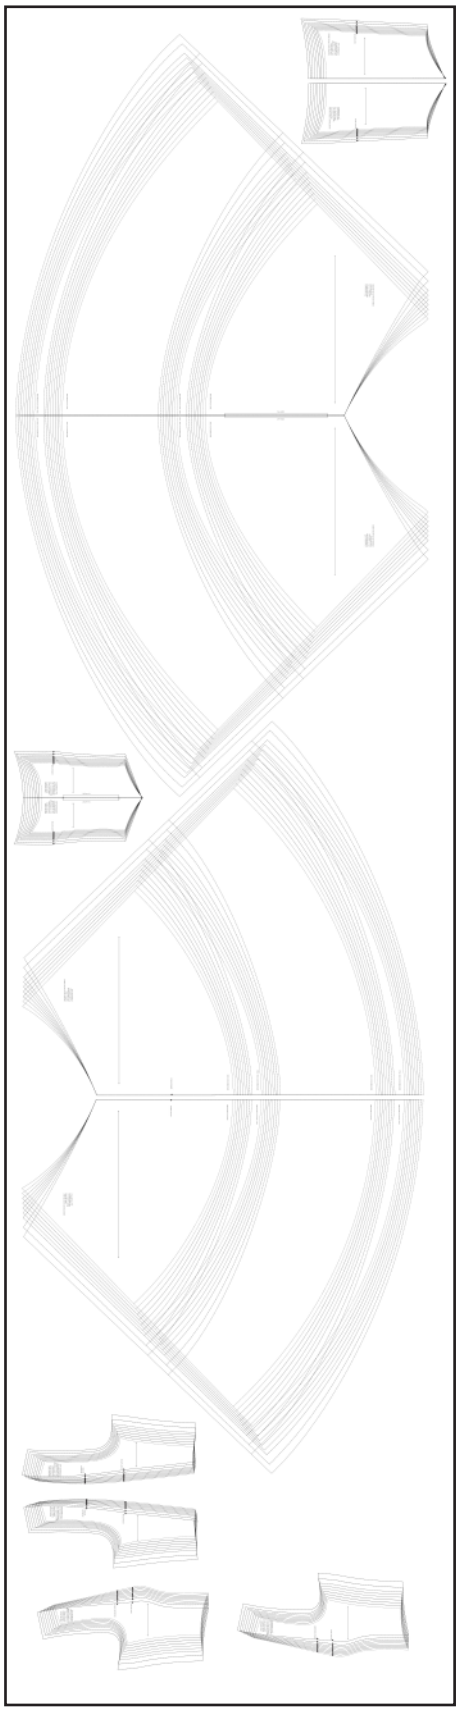

LINING: 3 3/4 Yards (3.43 m) of at least 48” (1.22 m) Wide Fabric




SUGGESTED CUTTING LAYOUT


(cont.)

MINI LENGTH

SHELL: 2 7/8 Yards (2.63 m) of at least 48” (1.22 m) Wide Fabric

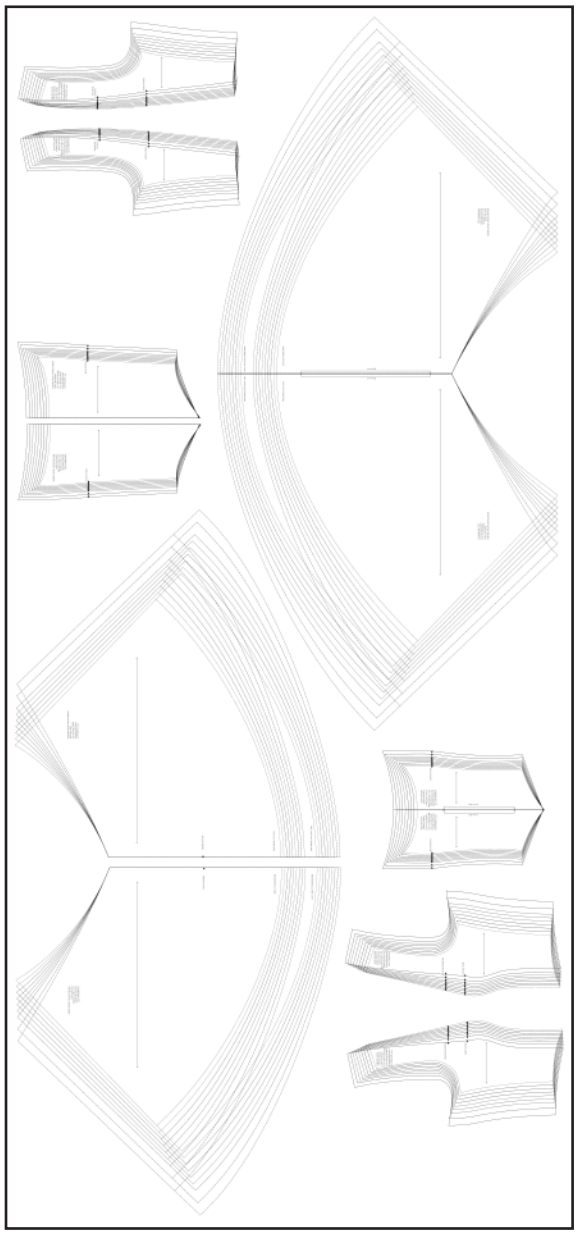

LINING: 2 1/4 Yards (2.06 m) of at least 48” (1.22 m) Wide Fabric

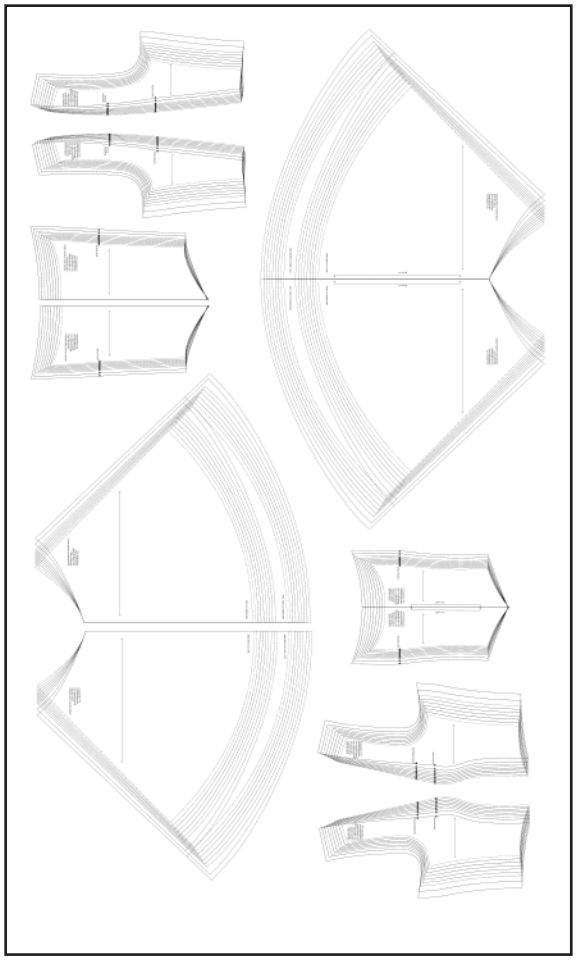

SEWING INSTRUCTIONS


Read instructions from left to right.

Video Tutorial: https://youtu.be/BxWH2puxY1Y

*****Check out the video tutorial for more detailed instructions & EXTRA tips on how to sew this dress!*** I HIGHLY recommend watching this as it goes into extreme detail. This instruction pamphlet shows the sewing steps, but the video tutorial goes into extreme detail on how to do each technique. The video tutorial ALSO covers some important callouts on cutting/marking details. Do not skip this video!**

*If you have a fabric that frays easily like denim, serge around bodice pieces first.


Place front bodice shell pieces right sides together at princess seams and pin. Sew, clip curves, and press INWARD (towards the center).

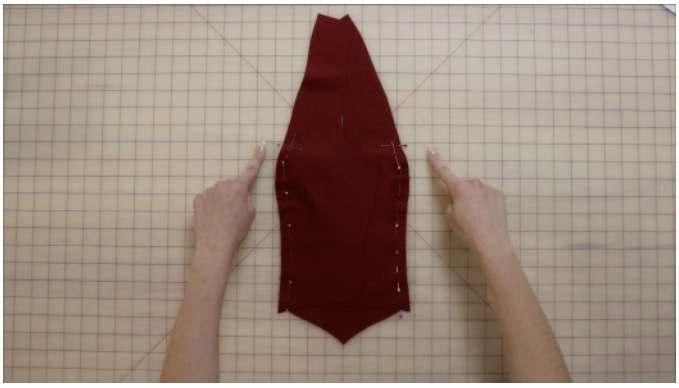

Place front and back bodice right sides together at side and shoulder seams and pin. Sew, clip curves, and press open. Repeat steps 1-3 for lining bodice.



Sew two rows of basting stitches in the seam allowance on the skirt SHELL waistline, starting at the side and stopping at the center. Repeat for other side. Do NOT backstitch and leave the thread tails long.

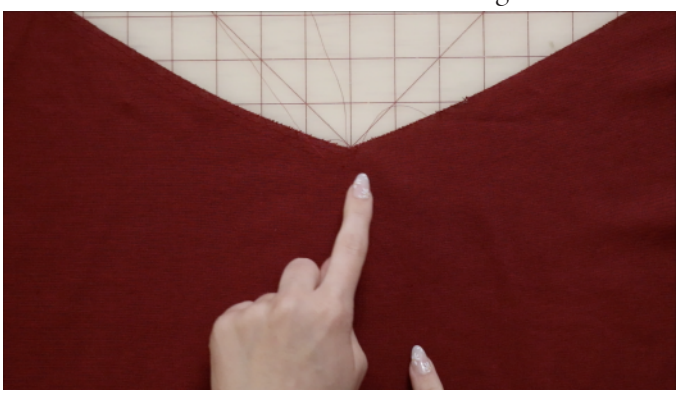


Place back bodice shell pieces right sides together at princess seams and pin. Sew, clip curves, and press INWARD



Serge sides of skirt shell pieces individually. Place skirt shell right sides together at side seams and pin. Sew and press open. Repeat for skirt lining.




Pull on the bobbin threads to gather the skirt waist to fit the bodice waistline. Even out the gathers, lining up skirt side seams with bodice side seams.

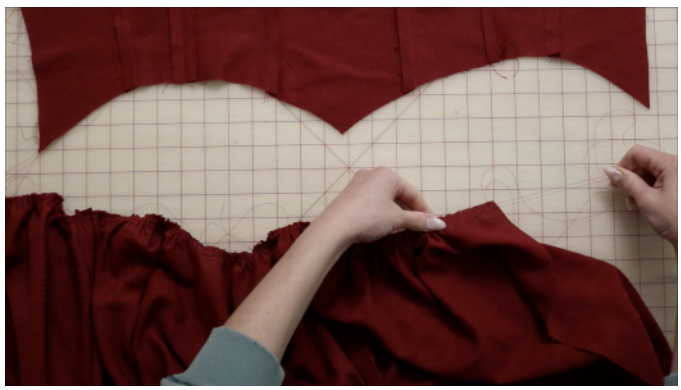

Place bodice shell and skirt shell right sides together at the waistline and pin. Sew, serge, clip waist at center point, and press upwards.



Place skirt and bodice lining right sides together at waistline and pin. Sew, serge, clip waist at center point, and press downwards.

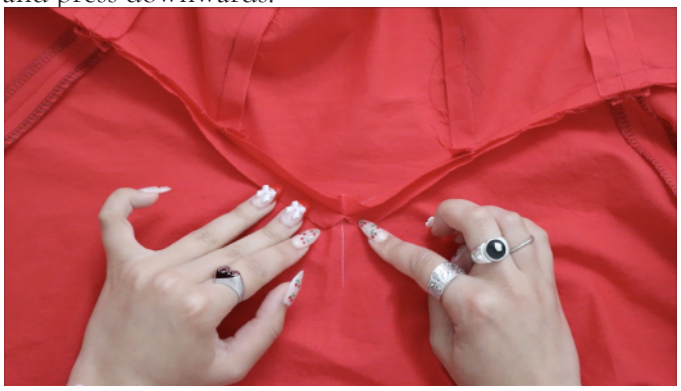

Finish center back shell seam by sewing the rest of the center back closed below the zipper. Press open.



Place shell and lining RIGHT sides together. Pin neckline, straps, and center back seam to zipper stop. Sew neckline/straps with 1/2" (12.7 mm) seam allowance and center back seam with 1/4" (6.35 mm) seam allowance.



TIP: Mark stitch line 1/2" away from raw edge to help with pinning/sewing the waistline seams.



Finish center back edges of shell AND lining by serging to prep for invisible zipper. Insert invisible zipper into the SHELL.



Clip excess zipper 1" (2.54 cm) below the start of the closed center back seam.



Clip and notch curves of neckline. Press neckline seam allowance.



Finish center back lining seam by sewing the rest of the center back closed below the zipper. Press open.




Secure the lining and shell armholes together by staystitching around the armscye 1/8" (3.2mm) from the edge.



Try on dress before hemming. Finish the shell hem by marking and cutting 1 1/4" (3.2 cm) below your desired length. Create a rolled hem.




Trim down the hem allowance to 1/8" (3.2 mm). Fold the hem up one more time and press. Topstitch. Done!

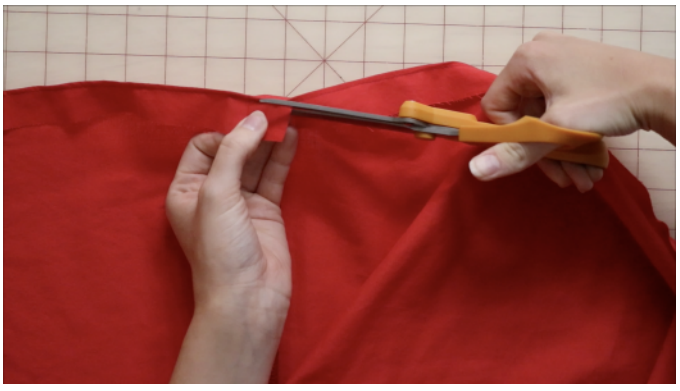

Flip dress rightside out and press neckline. Topstitch neckline.



Use your bias tape to sew a non-exposed bound finish to your armscye. Remember- the video tutorial shows how to do all these techniques **in-depth**!

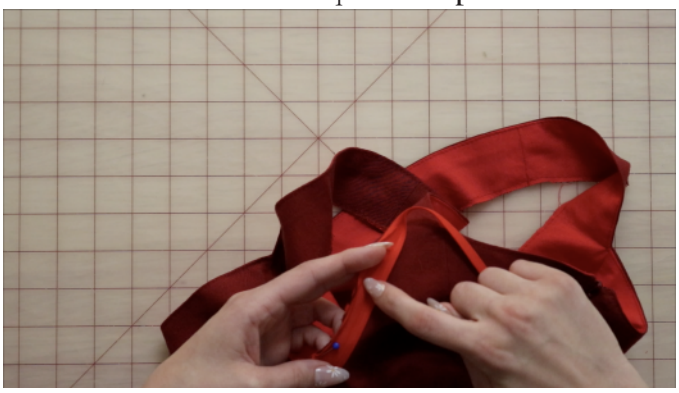

Mark and cut lining 1" shorter than shell. Create a rolled hem. To create a rolled hem: Press up hem allowance and sew 1/8" (3.2 mm) away from the edge.

