


TOAST SYSTEM — CONNECTION ORDER				INTERNET → DEVICES
#	Equipment	Purpose	Typical Location	Network Cable
1	ISP Router	Brings internet service into the building.	Network closet	Customer Provided
2	Pronto / Meraki	Toast's private managed network — a dedicated, isolated network for all Toast equipment.	Network closet	Toast Managed
3	Access Point	Its own extender that broadens the Toast network's wireless coverage for handhelds.	Wall or ceiling mounted	Yes
	↳ Handheld POS Device	Lets servers take orders and payments at the table. Connects over the access point or cellular — no cable needed.	Dining area	Wi-Fi / Cellular
4	24-Port PoE Switch	Connects and powers all wired devices. No PoE injector needed.	Network closet	Yes
5	POS Terminal	Takes orders, processes payments, manages operations. The devices below connect through it.	Host stand, cashier, bar	Yes
	↳ Cash Drawer	Opens during transactions; connects to the terminal.	Under POS terminal	No
	↳ Customer Display	Shows totals, payment prompts, and tips to guests.	Checkout counter	No
	↳ Receipt Printer	Prints customer receipts.	POS station	No
	↳ Barcode Scanner	Scans products and inventory items.	POS station	No
6	Kitchen Printer	Prints food tickets for kitchen staff.	Kitchen	Yes
7	Kitchen Display (KDS)	Screen that shows kitchen orders digitally instead of paper tickets.	Kitchen / expo station	Yes

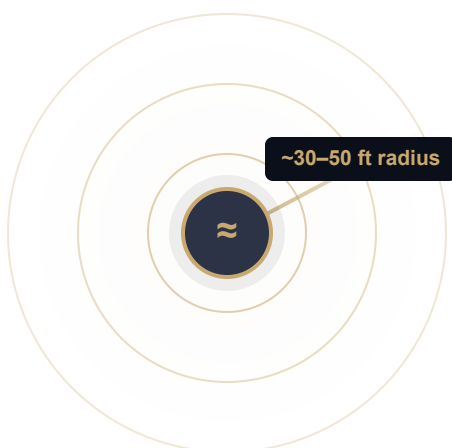

How far one access point reaches

A single indoor access point typically covers a **30–50 ft radius**, or roughly **1,500–2,500 sq ft** of open space. Walls, kitchen equipment, walk-in coolers, and metal shelving shorten that range, so real-world coverage in a busy restaurant sits at the lower end. We plan slight overlap between APs so handhelds stay connected as servers move between the dining room, bar, and kitchen.

30–50 ft

EFFECTIVE RADIUS

~2,000 sq ft

COVERAGE PER AP

15–20%

OVERLAP PLANNED

OUR CABLING

BUILT TO LAST



Handmade, defect-free

Every cable is hand-terminated and tested — no mass-produced manufacturer defects.



CAT6 outdoor jacket

Heavy-duty outdoor-rated jacketing, waterproof and sealed against moisture.



Gold-plated connectors

Corrosion-resistant gold contacts for a clean, reliable connection over the long haul.



Heat-resistant

Built to withstand the heat and humidity of a working kitchen without degrading.



10–15 year lifespan

Engineered to last 10 to 15 years with no maintenance once installed.



Terminated & certified

Each run is labeled, tested, and certified at handover, with documentation provided.

The IOT TECHS standard — handmade CAT6 with waterproof outdoor jackets and gold-plated connectors, made to survive the heat of your kitchen and last 10–15 years maintenance-free.

Good to know — Router and PoE switch installation charges are typically **waived** when the equipment is located within 6 feet of the ISP modem or an existing network rack.