


| TOAST SYSTEM — CONNECTION ORDER |                       |                                                                                                                   |                          | INTERNET → DEVICES |
|---------------------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------|
| #                               | Equipment             | Purpose                                                                                                           | Typical Location         | Network Cable      |
| 1                               | ISP Router            | Brings internet service into the building.                                                                        | Network closet           | Customer Provided  |
| 2                               | Pronto / Meraki       | Toast's private managed network — a dedicated, isolated network for all Toast equipment.                          | Network closet           | Toast Managed      |
| 3                               | Access Point          | Its own extender that broadens the Toast network's wireless coverage for handhelds.                               | Wall or ceiling mounted  | Yes                |
|                                 | ↳ Handheld POS Device | Lets servers take orders and payments at the table. Connects over the access point or cellular — no cable needed. | Dining area              | Wi-Fi / Cellular   |
| 4                               | 24-Port PoE Switch    | Connects and powers all wired devices. No PoE injector needed.                                                    | Network closet           | Yes                |
| 5                               | POS Terminal          | Takes orders, processes payments, manages operations. The devices below connect through it.                       | Host stand, cashier, bar | Yes                |
|                                 | ↳ Cash Drawer         | Opens during transactions; connects to the terminal.                                                              | Under POS terminal       | No                 |
|                                 | ↳ Customer Display    | Shows totals, payment prompts, and tips to guests.                                                                | Checkout counter         | No                 |
|                                 | ↳ Receipt Printer     | Prints customer receipts.                                                                                         | POS station              | No                 |
|                                 | ↳ Barcode Scanner     | Scans products and inventory items.                                                                               | POS station              | No                 |
| 6                               | Kitchen Printer       | Prints food tickets for kitchen staff.                                                                            | Kitchen                  | Yes                |
| 7                               | Kitchen Display (KDS) | Screen that shows kitchen orders digitally instead of paper tickets.                                              | Kitchen / expo station   | Yes                |

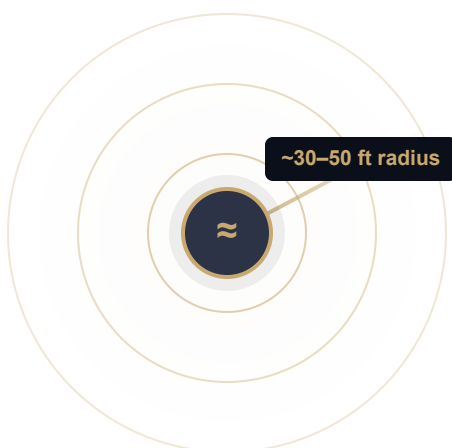

### How far one access point reaches

A single indoor access point typically covers a **30–50 ft radius**, or roughly **1,500–2,500 sq ft** of open space. Walls, kitchen equipment, walk-in coolers, and metal shelving shorten that range, so real-world coverage in a busy restaurant sits at the lower end. We plan slight overlap between APs so handhelds stay connected as servers move between the dining room, bar, and kitchen.

**30–50 ft**

EFFECTIVE RADIUS

**~2,000 sq ft**

COVERAGE PER AP

**15–20%**

OVERLAP PLANNED

## OUR CABLING

## BUILT TO LAST



### Handmade, defect-free

Every cable is hand-terminated and tested — no mass-produced manufacturer defects.



### CAT6 outdoor jacket

Heavy-duty outdoor-rated jacketing, waterproof and sealed against moisture.



### Gold-plated connectors

Corrosion-resistant gold contacts for a clean, reliable connection over the long haul.



### Heat-resistant

Built to withstand the heat and humidity of a working kitchen without degrading.



### 10–15 year lifespan

Engineered to last 10 to 15 years with no maintenance once installed.



### Terminated & certified

Each run is labeled, tested, and certified at handover, with documentation provided.

**The IOT TECHS standard** — handmade CAT6 with waterproof outdoor jackets and gold-plated connectors, made to survive the heat of your kitchen and last 10–15 years maintenance-free.

**Good to know** — Router and PoE switch installation charges are typically **waived** when the equipment is located within 6 feet of the ISP modem or an existing network rack.