
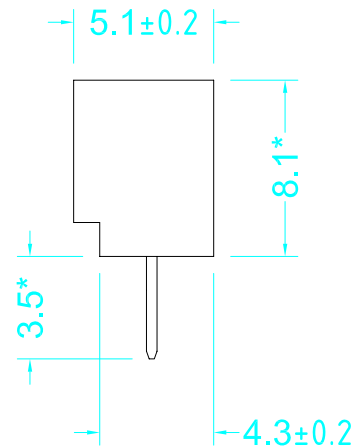


标记	版本	文件编号	变更前	变更后	日期	变更人
	A		/	新版图	2013.07.25	WZW

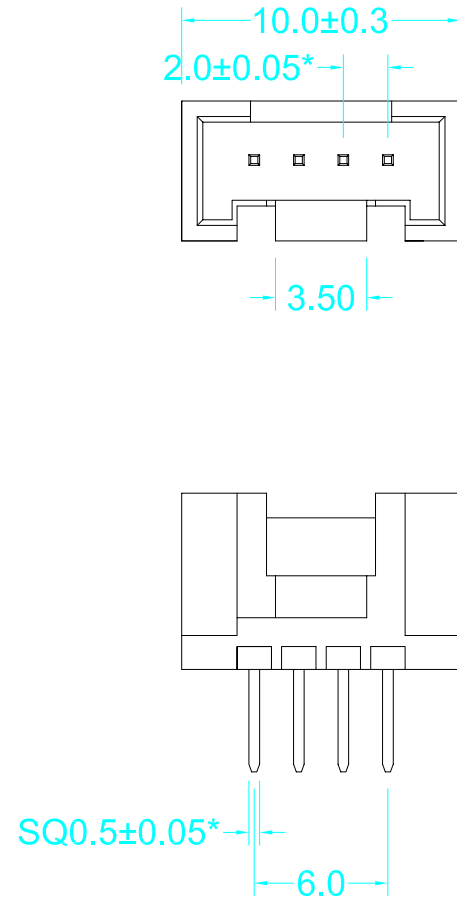

Performance characteristics:

1.The dimensions with "*" are key control size

2.Main body part material

Insulator: NYLON UL94V-0

Contact: Brass

3.Plating

Contact: Tin-plated according to customer needs

4.Electrical requirements:

Current rating: 2 A

Voltage rating: 250V

Contact resistance: $\leq 10 \text{ m}\Omega$


Insulation resistance: $\geq 1000 \text{ M}\Omega$

Withstanding voltage: 800 V AC, 60s

5.Environment specification

Working temperature: $-25^\circ\text{C} \sim 85^\circ\text{C}$

Method of packing: 1000 pcs per bag

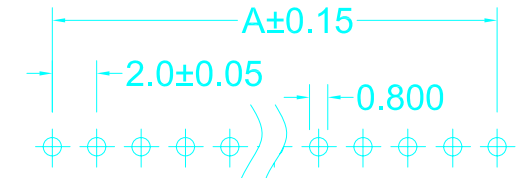

PCB LAYOUT

DRAWN		DATE		<div></div> SHENZHEN NS-TECH CO.,LTD.	
WZW		2013.07.25			
CHECKED		DATE		TITLE: 1125S-4P SPEC: 不打K 环保	
APPROVED		DATE		PART NO.	
				CLIENT P/N	
				UNIT: mm	SCALE: free
					 
°				FILE NO.:NS-1125-W00008	REVA
					HC