


42HS4013A4-G10 40 mm nema 17 hybrid high speed gear printer stepper motor with 10:1 gear reduction box square

Electrical Specification Content

Step Angle	1.8 degree
Phase Current	1.3A
Resistance	2.5ohm
Inductance	5mH
Rotor Inertia	54g.cm ²
Holding Torque	40N.cm
Detent Torque	2.2N.cm
Motor length	40mm
Lead Wire	4
Radial Torque	4N.m

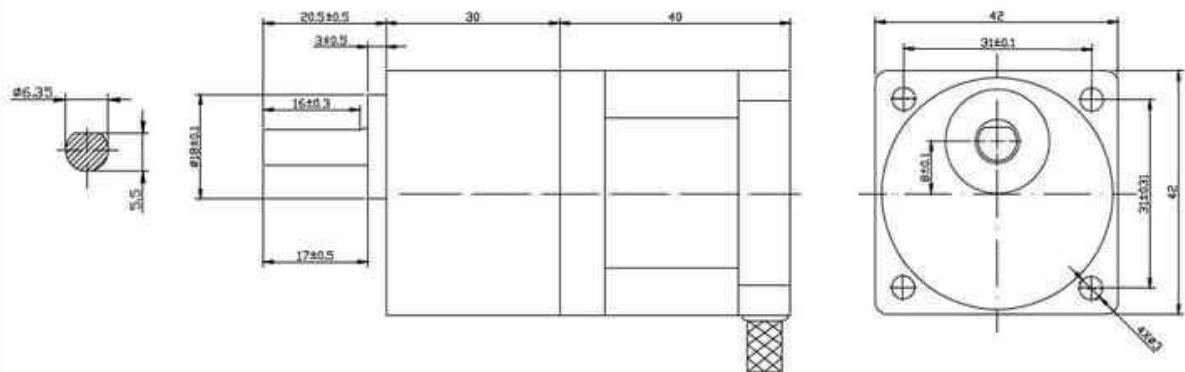

Nema 17 gear reducer stepper motor

Electrical Specifications			
STEP ANGLE	步距角	1.8	° /STEP
RATED VOLTAGE	相电压	3.25	V
CURRENT	相电流	1.3	A/PHASE
RESISTANCE	相电阻	2.5	Ω /PHASE
INDUCTANCE	相电感	5	mH/PHASE
HOLDING TORQUE	静力矩	40	N.cm
DETENT TORQUE	定位力矩	2.2	N.cm
ROTOR INERTIA	转动惯量	54	g.cm ²
MOTOR LENGTH	机身长度	40	mm
LEAD WIRE	引线数	4	NO

