Point type crimping



Code: HS8

Purpose: Point-type crimping for non-insulated cable lugs and links.

Capacity	1.25-10 mm²
AWG	16-8
Length	270 mm
Weight	0.55 kg
Mechanism	Ratchet action



Code: CT80

Purpose: Point-type crimping for larger copper tube terminals.

Capacity	10-95 mm²
AWG	8-3/0
Length	635 mm
Weight	3.2 kg
Mechanism	Adjustable jaws

Cable lug crimping



Code: HX26B

Purpose: Manual crimping for non-insulated terminals.

Capacity	6-25 mm²
Operation	Hand operated
Application	Bare cable terminals



Code: HX150SC

Purpose: Manual crimping for large copper tube cable lugs.

Capacity	25-150 mm²
Operation	Two-hand lever action
Application	Copper tube terminals

Series reference photo

Ratchet terminal crimping



Code: HS03BC

Purpose: Crimping non-insulated tabs and receptacles.

Capacity	1.5-6 mm²
AWG	16-10
Length	230 mm
Weight	0.6 kg
Mechanism	Ratchet with release lock



Code: HS30J

Purpose: Ratchet crimping for insulated terminals and connectors.

Capacity	0.5-6 mm²
AWG	22-10
Length	230 mm
Weight	0.6 kg
Mechanism	Ratchet with release lock

Replaces unverified code HS2303BC


Multifunction crimping pliers



Code: HS313

Purpose: Multifunction pliers for stripping, cutting and crimping non-insulated terminals.

Functions	5 in 1
Length	235 mm
Weight	0.20 / 0.24 kg*
Operation	Manual pliers

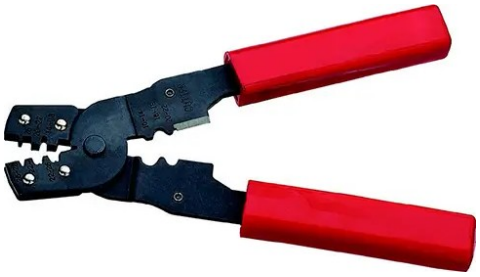

Code: HS202B

Purpose: Crimping non-insulated terminals and cutting wires.

Capacity	0.08-2.5 mm²
AWG	28-14
Length	185 mm
Weight	0.20 / 0.24 kg*

Ferrule crimping



Code: HSC816-4

Purpose: Square-profile crimping for insulated and non-insulated ferrules.

Capacity	4-16 mm²
AWG	12-6
Length	210 mm
Weight	0.52 kg
Mechanism	Self-adjusting jaws




Code: HS05WF

Purpose: Crimping insulated and non-insulated wire ferrules.

Capacity	0.5-6 mm²
AWG	20-10
Length	203 mm
Weight	0.4 kg
Mechanism	Ratchet with release lock

Modular plug crimping

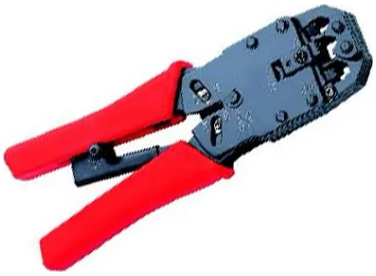

Code: HT2008R

Purpose: Crimping telephone and network modular plugs.

Connectors	RJ10 / RJ11 / RJ45
Length	205 mm
Weight	0.51 kg
Mechanism	Ratchet action



Code: HT315

Purpose: Crimping modular plugs, with wire cutting and stripping functions.

Connectors	RJ10 / RJ11 / RJ45
Length	200 mm
Weight	0.35 / 0.40 kg*
Functions	Crimp / cut / strip

Ratchet cable cutting



Code: VC36A

Purpose: Cutting copper and aluminium cables.

Cable diameter	Up to 36 mm
Cable area	Up to 300 mm²
Length	260 mm
Weight	0.6 kg
Mechanism	Ratchet drive

Not for steel wire or wire rope



Code: VC60A

Purpose: Cutting larger copper and aluminium cables.

Cable diameter	Up to 60 mm
Cable area	Up to 500 mm²
Length	320 mm
Weight	0.8 kg
Mechanism	Ratchet drive

Not for steel wire or wire rope

Automatic wire stripping



Code: HS-D1

Purpose: Automatic stripping, wire cutting and terminal crimping.

Stripping range	0.25-10 mm²
Length	205 mm
Weight	0.30 / 0.35 kg*
Functions	Strip / cut / crimp



Code: HS700D

Purpose: Automatic wire stripping for electrical installation work.

Stripping range	0.25-6 mm²
Length	170 mm
Weight	0.22 kg
Operation	Spring-return handle

Wire preparation



Code: FSA0625

Purpose: Cutting and stripping small wires and cable preparation.

Stripping range	0.2-2.4 mm²
Cutting capacity	Up to 25 mm²
Operation	Manual pliers



Code: HS1041

Purpose: Wire cutting, stripping and terminal crimping.

Stripping range	0.9-6 mm²
Cutting capacity	Up to 16 mm²
Length	165 mm
Weight	0.16 kg

Image reproduced from the source catalogue

Hole cutting



Code: HC-19

Purpose: Drilling circular holes for installation work.

Diameter	19 mm
Cutter material	High-speed steel
Finish	Nickel plated
Brand	CHISU

Series reference photo



Code: HC25

Purpose: Drilling a larger circular opening for installation work.

Diameter	25 mm
Cutter material	High-speed steel
Finish	Nickel plated
Brand	CHISU

Series reference photo

PVC conduit bending



Code: BS20

Purpose: Supporting PVC conduit during manual bending.

Conduit size	20 mm
Tool type	Internal bending spring
Profile	Flat type
Brand	SHELL

Series reference photo



Code: BS25

Purpose: Supporting larger PVC conduit during manual bending.

Conduit size	25 mm
Tool type	Internal bending spring
Profile	Flat type
Brand	SHELL

Series reference photo

Pipe holding and threading



Code: HPV-1

Purpose: Holding pipe securely during cutting and threading.

Size designation	No. 1
Body	Ductile iron
Jaws	Hardened steel
Mounting	Bench or stand



Code: JT4411PD

Purpose: Manual threading of steel conduit pipe.

Contents	4 die sets and carrying case
Body / dies	Cast steel / alloy
Thread form	BSPT or NPT option*
Brand	SHELL

Cable pulling and pipe cutting



Code: TWP-15

Purpose: Pulling electrical wires through conduit.

Length	15 m
Material	Polyester
Construction	Twisted-pair puller



Code: FYC-101C

Purpose: Cutting PVC conduit and plastic pipe.

Pipe diameter	20-32 mm
Operation	Manual pipe cutter
Application	PVC / plastic pipe

Not for steel pipe or electrical cables

Selection notes

Choose the tool by terminal type and cable size. mm² indicates conductor cross-sectional area; AWG means American Wire Gauge.

Core crimping families are presented as two-model selections. The final pages retain the requested cutting, stripping and conduit accessories.

Dimensions and weights appear only where a matching published specification was located. Unpublished values have been omitted.

Photos are supplier references. Shared series photos are labelled; colour and supplied packaging may vary.

* A slash between two weights reproduces the supplier listing; the supplier does not identify the basis of each figure. Confirm the supplied unit when ordering.

* JT4411PD: confirm the required thread standard and included die sizes before ordering.

Source records and model notes

Specification and image references checked 19 October 2026. Links below open the matching supplier product record or source catalogue.

[01] HS8	Open source record
[02] CT80	Open source record
[03] HX26B	Open source record
[04] HX150SC	Open source record
[05] HS03BC HS30J HS05WF	Open source record
[06] HS313 HS202B	Open source record
[07] HSC816-4	Open source record
[08] HT2008R HT315	Open source record
[09] VC36A VC60A	Open source record
[10] HS-D1	Open source record
[11] HS700D HS1041	Open source record
[12] FSA0625	Open source record
[13] HC-19 HC25	Open source record
[14] BS20 BS25	Open source record
[15] HPV-1	Open source record
[16] JT4411PD	Open source record
[17] TWP-15	Open source record
[18] FYC-101C	Open source record

Model clarification

HS2303BC could not be verified. HS03BC is used as the nearest documented model. The supplier specification sheet calls it HS-03B, while the selectable product code and catalogue use HS03BC.

Hyphens and spaces vary by source: HS8 / HS-8, CT80 / CT-80, HSC816-4 / HSC8 16-4, HC-19 / HC19, TWP-15 / TWP15 and FYC-101C / FYC101C refer to the listed catalogue codes.

HS-D1: the dedicated specification sheet states 0.25-10 mm² for stripping. An older general catalogue states 0.25-6 mm². The dedicated specification sheet is used here.

SHELL conduit tools and CHISU hole cutters are associated products in the supplier range; their brands are shown where identified. No country of origin or stock availability is implied.