

ERGOPACK 726E

MOBILE AND ERGONOMIC PALLET STRAPPING SYSTEM



ERGOPACK 726E

MOBILE AND ERGONOMIC PALLET STRAPPING SYSTEM



SYSTEM INFORMATION:

Line:	Economy Line
Model:	<u>726E</u>
Generation:	2
Tariff Nr.:	842240
Dimensions (l, w, h):	6300 x 7700 x 1200 mm
Weight:	~92,9 kg
Flexibility (pallet width):	40 - 255 cm
Flexibility (pallet height):	10 - 230 cm
Chain Speed:	40m/min



ERGOPACK 726E

Mobile and Ergonomic Pallet Strapping System

[ErgoPack Economy-Line](#)

System Specifications:

Chain:	Standard 6 m
Flexibility (pallet width):	30 - 255 cm
Chain Speed:	40m/min
Flexibility (pallet height):	10 - 230 cm
Line-Laser Type 2:	Optional
Standard Tool-Lift:	Included
Sledge 85:	Included
Control:	Electrically via joystick
Sealing head:	Mounted on Tool-Lift
Change settings:	With pin

Sealing Head:

Weight:	3,8 – 4,3 kg
Dimensions (l, w, h):	335 x 140 x 180 mm
Tension power:	400 - 2500N
Current (nominal):	Up to 10 A
Strap width:	13 - 16 mm
Strap thickness	0,40 – 0,80 mm
Strap ¹ :	Polypropylene (PP), Polyester (PET)

Certifications:

ISO 12100:2010:	✓ Available
EU decl. of conformity:	✓ Available
AGR:	✓ Available

¹ Coil diameter: 406, 400, 200



ERGOPACK 726E

Mobile and Ergonomic Pallet Strapping System

[ErgoPack Economy-Line](#)

Available Options:

[Triplex-Tool-Lift:](#)

Sledge¹:

[Strap-Brake-Relief:](#)

[Headpiece with Bumper²:](#)

Spare battery:

[MOHM³](#) up to 3.05m:

Additional chain:

Optional

47 | 47S | 85L

Optional

Optional

Optional

Optional

Optional

Battery:

Type:

24 V lead-fleece battery

Weight:

12,3 kg

Loading time:

8 - 10 hours

Voltage (nominal):

24 V

Strapping cycles

350

Charging Station:

Type:

3-stage lead loader

Operating voltage:

100-240 V - 50/60 Hz

Power consumption:

Max. 60 W

Power supply:

2x 12 V DC/2A

Certifications:

ISO 12100:2010:

✓ Available

EU decl. of conformity:

✓ Available

AGR:

✓ Available

¹ Sledge 47 for pallets with lower clearance height (min. clearance of 55mm); standard sledge 85 for EPAL and equivalent

² Max. 40mm overhang

³ Mobile Overheight Module



ERGOPACK 726E

OPTIONS INCLUDED IN SYSTEM AND PRICE

ERGOPACK 726E

OPTIONS INCLUDED IN SYSTEM AND PRICE

TOOL-LIFT

- Standard for pallets >80cm
- Sealing head quick release included
- [Video](#)



SET PALLET WIDTH

- With pin
- Pallet width + 20cm
- [Video](#)



SLEDGE

- Standard sledge 85 included
- For clearance height >95mm





ERGOPACK 726E

OPTIONS INCLUDED IN SYSTEM AND PRICE


CONTROL

- Electrical via joystick



SEALING HEAD

- Sealing head installed and mounted on system

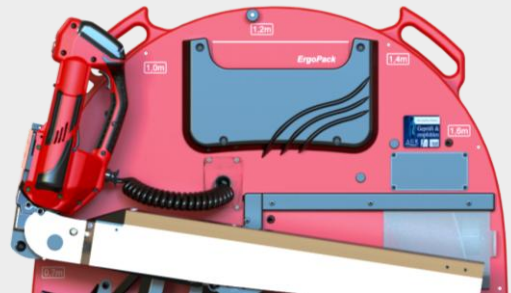



ERGOPACK 726E

OPTIONAL ACCESSORIES

ERGOPACK 726E

ADDITIONAL OPTIONS AND ACCESSORIES

TRIPLEX-TOOL-LIFT (TTL)

- Ideal for pallets lower than 80cm
- Suitable for pallets as low as 10cm in height
- [Video](#)



SEALING HEAD REMOVABLE FROM TTL

- Adapter to release the sealing head from the Tool-Lift



SLEDGE

- 47 for pallets with a clearance height of 55mm to 95mm
- 47S for pallets with narrow entry, 160mm in width
- 47L extended skid for lower runner heights of up to 40mm



ERGOPACK 726E

ADDITIONAL OPTIONS AND ACCESSORIES

STRAP-BRAKE-RELIEF

- For pallets higher than 120cm
- Relief in pulling out strap
- [Video](#)




HEAD PIECE WITH BUMPER

- For pallets with an overhang of max. 40mm
- Bumper to pass the overhang
- [Video](#)



LINE LASER

- For optimal system positioning

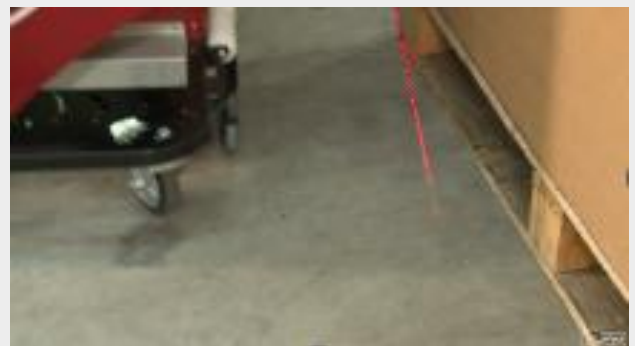

ERGOPACK 726E

ADDITIONAL OPTIONS AND ACCESSORIES


MORE CHAIN IN SYSTEM

- Up to 2m extra, 8m in total



SPARE BATTERY

- Optimal for multiple shifts

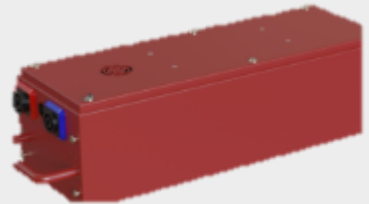

ERGOPACK 726E

ADDITIONAL OPTIONS AND ACCESSORIES

MOBILE OVERHEIGHT MODULE

- For pallets higher than 230cm
- Up to 305cm
- [Video](#)



MOBILE SLEDGE TUNNEL

- Goods strapped on scantlings
- One pair includes two tunnels
- [Video](#)



STATIONARY SLEDGE TUNNEL

- Adjustable sledge tunnel for different widths
- [Video](#)



ERGOPACK 726E

APPLICATION EXAMPLES

