



ERGOPACK 726X-Li


MOBILE AND ERGONOMIC PALLET STRAPPING SYSTEM





ERGOPACK 726X-LI

MOBILE AND ERGONOMIC PALLET STRAPPING SYSTEM

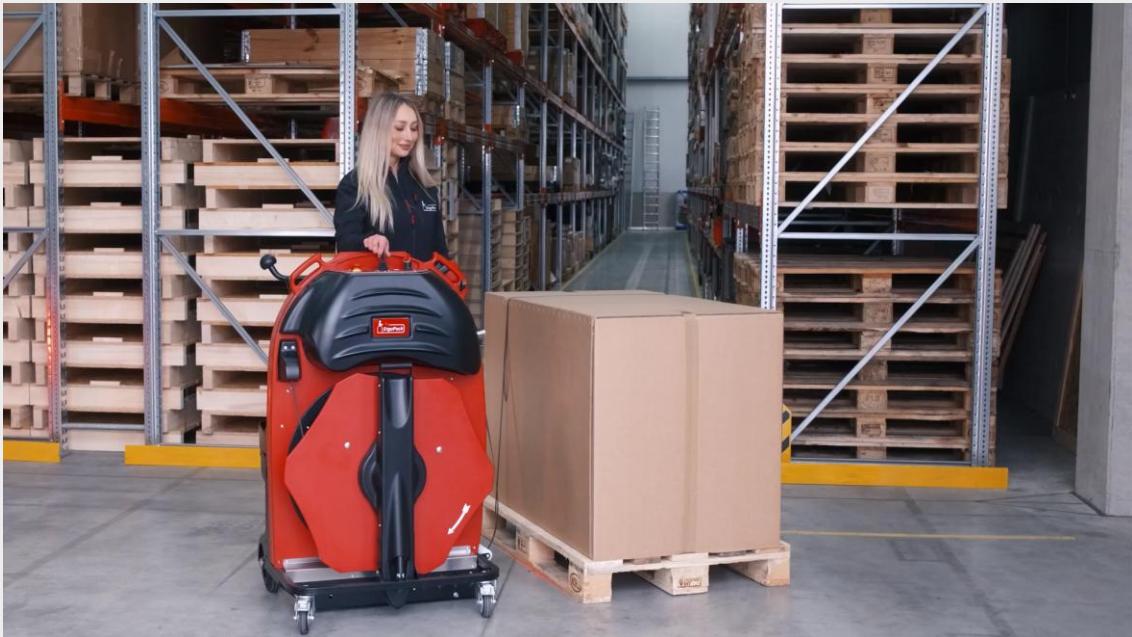

SYSTEM INFORMATION:

| | |
|------------------------------|--------------------------------|
| Line: | X-pert |
| Model: | <u>726X Li</u> |
| Generation: | 2 |
| Tariff Nr.: | 842240 |
| Dimensions (l, w, h): | 665 x 770 x 1200 mm |
| Weight: | ~104 kg |
| Flexibility (pallet width): | 40 - 270 cm |
| Flexibility (pallet height): | 10 - 230 cm |
| Chain Speed: | 66m/min |



ERGOPACK 726X-LI

Mobile and Ergonomic Pallet Strapping System ErgoPack X-pert Line

System Specifications:

| | |
|------------------------------------|------------------------------|
| Chain: | Standard 6 m |
| <u>Flexibility (pallet width):</u> | 40 - 270 cm |
| Chain Speed: | 66m/min |
| Flexibility (pallet height): | 10 - 230 cm |
| <u>Line-Laser Type 2:</u> | Included |
| <u>Standard Tool-Lift:</u> | Included |
| Sledge 85: | Included |
| Control: | Electrically via joystick |
| Sealing head: | Mounted on Tool-Lift |
| <u>Change settings:</u> | Siemens industry touchscreen |

Sealing Head:

| | |
|-----------------------|-------------------------------------|
| Weight: | 3,8 – 4,3 kg |
| Dimensions (l, w, h): | 335 x 140 x 180 mm |
| Tension power: | 400 - 2500N |
| Current (nominal): | Up to 10 A |
| Strap width: | 13 - 16 mm |
| Strap thickness | 0,40 – 0,80 mm |
| Strap ¹ : | Polypropylene (PP), Polyester (PET) |

Certifications:

| | |
|-------------------------|-------------|
| ISO 12100:2010: | ✓ Available |
| EU decl. of conformity: | ✓ Available |
| AGR: | ✓ Available |

¹Coil diameter: 406, 400, 200



ERGOPACK 726X-LI

Mobile and Ergonomic Pallet Strapping System

ErgoPack X-pert Line

Available Options:

Triplex-Tool-Lift:

Optional

Sledge¹:

47 | 47S | 85L

Strap-Brake-Relief:

Optional

Headpiece with Bumper²:

Optional

Spare battery:

Optional

MOHM³ up to 3.05m:

Optional

Additional chain:

Optional

Battery:

Type:

Lithium-Ion

Dimensions (l, w, h):

393 x 153 x 82 mm

Weight:

~5 kg

Loading time:

~3,5 hours

Voltage (nominal):

36,3 V

Capacity (nominal):

24,15 Ah

Strapping cycles:

Up to 1200

Charging Station:

Type:

Wide-range charger

Dimensions (l, w, h):

225 x 156 x 69 mm

Weight (incl. charger):

8,8 kg

Operating voltage:

100-240 V - 50/60 Hz

Power consumption:

Up to ~650 W

Current (nominal):

Up to 10 A

¹ Sledge 47 for pallets with lower clearance height (min. clearance of 55mm); standard sledge 85 for EPAL and equivalent

² Max. 40mm overhang

³ Mobile Overheight Module



ERGOPACK 726X-Li

OPTIONS INCLUDED IN SYSTEM AND PRICE

ERGOPACK 726X-Li

OPTIONS INCLUDED IN SYSTEM AND PRICE

CONTROL

- Electrical via joystick
- [Video](#)



DISPLAY

- Siemens Industry Touchscreen
- Easy change of settings
- Set pallet width
- [Video](#)



SLEDGE

- Standard sledge 85 included
- For clearance height >95mm





ERGOPACK 726X-Li

OPTIONS INCLUDED IN SYSTEM AND PRICE

TOOL-LIFT

- Standard for pallets >80cm
- Sealing head quick release included
- [Video](#)



LINE LASER

- For optimal system positioning
- [Video](#)



SLEDGE

- Standard sledge 85 included
- For clearance height >95mm





ERGOPACK 726X-Li

OPTIONAL ACCESSORIES

ERGOPACK 726X-Li

ADDITIONAL OPTIONS AND ACCESSORIES

TRIPLEX-TOOL-LIFT (TTL)

- Ideal for pallets lower than 80cm
- Suitable for pallets as low as 10cm in height
- [Video](#)



SEALING HEAD REMOVABLE FROM TTL

- Adapter to release the sealing head from the Tool-Lift



SLEDGE

- 47 for pallets with a clearance height of 55mm to 95mm
- 47S for pallets with narrow entry, 160mm in width
- 47L extended skid for lower runner heights of up to 40mm



ERGOPACK 726X-Li

ADDITIONAL OPTIONS AND ACCESSORIES

STRAP-BRAKE-RELIEF

- For pallets higher than 120cm
- Relief in pulling out strap
- [Video](#)



HEAD PIECE WITH BUMPER

- For pallets with an overhang of max. 40mm
- Bumper to pass the overhang
- [Video](#)



EASY MOVE ASSISTANT

- For easier handling of machine
- More ergonomic for longer distances





ERGOPACK 726X-Li

ADDITIONAL OPTIONS AND ACCESSORIES

MOBILE OVERHEIGHT MODULE

- For pallets higher than 230cm
- Up to 305cm
- [Video](#)



MOBILE SLEDGE TUNNEL

- Goods strapped on scantlings
- One pair includes two tunnels
- [Video](#)



STATIONARY SLEDGE TUNNEL

- Adjustable sledge tunnel for different widths
- [Video](#)





ERGOPACK 726X-Li

ADDITIONAL OPTIONS AND ACCESSORIES

MORE CHAIN IN SYSTEM

- Up to 2m extra, 8m in total




SPARE BATTERY

- Optimal for multiple shifts



SCREEN PROTECTOR

- Protect the display from damages





ERGOPACK 726X-Li

APPLICATION EXAMPLES

