



ERGOPACK 700X-LI

MOBILE AND ERGONOMIC PALLET STRAPPING SYSTEM



ERGOPACK 700X-Li

MOBILE AND ERGONOMIC PALLET STRAPPING SYSTEM



SYSTEM INFORMATION:

Line:	X-pert
Model:	700X Li
Generation:	2
Tariff Nr.:	842240
Dimensions (l, w, h):	665 x 770 x 1200 mm
Weight:	95 kg
Flexibility (pallet width):	40 - 270 cm
Flexibility (pallet height):	10 - 230 cm
Chain Speed:	66m/min



ERGOPACK 700X Li

Mobile and Ergonomic Pallet Strapping System

[ErgoPack X-pert Line](#)

System Specifications:

Chain:	Standard 6 m
Flexibility (pallet width):	40 - 270 cm
Chain Speed:	66m/min
Flexibility (pallet height):	10 - 230 cm
Line-Laser Type 2:	Optional
Standard Tool-Lift:	Optional
Sledge 85:	Included
Control:	Electrically via joystick
Sealing head:	Optional
Change settings:	Siemens industry touchscreen
Possible straps ¹ :	Polypropylene (PP), Polyester (PET), Paper, Cord, Composite

Certifications:

ISO 12100:2010:	✓ Available
EU decl. of conformity:	✓ Available
AGR:	✓ Available

¹ Coil diameter: 406, 400, 200



ERGOPACK 700X Li

Mobile and Ergonomic Pallet Strapping System

[ErgoPack X-pert Line](#)

Available Options:

[Triplex-Tool-Lift:](#)

Sledge¹:

[Strap-Brake-Relief:](#)

[Headpiece with Bumper²:](#)

Spare battery:

[MOHM³](#) up to 3.05m:

Additional chain:

Optional

47 | 47S | 85L

Optional

Optional

Optional

Optional

Optional

Battery:

Type:

Dimensions (l, w, h):

Weight:

Loading time:

Voltage (nominal):

Capacity (nominal):

Strapping cycles:

Lithium-Ion

393 x 153 x 82 mm

~5 kg

~3,5 hours

36,3 V

24,15 Ah

Up to 1200

Charging Station:

Type:

Dimensions (l, w, h):

Weight (incl. charger):

Operating voltage:

Power consumption:

Current (nominal):

Wide-range charger

225 x 156 x 69 mm

8,8 kg

100-240 V - 50/60 Hz

Up to ~650 W

Up to 10 A

¹ Sledge 47 for pallets with lower clearance height (min. clearance of 55mm); standard sledge 85 for EPAL and equivalent

² Max. 40mm overhang

³ Mobile Overheight Module



ERGOPACK 700X-LI

OPTIONS INCLUDED IN SYSTEM AND PRICE

ERGOPACK 700X-LI

OPTIONS INCLUDED IN SYSTEM AND PRICE


CONTROL

- Electrical via joystick
- [Video](#)



DISPLAY

- Siemens Industry Touchscreen
- Easy change of settings
- Set pallet width
- [Video](#)

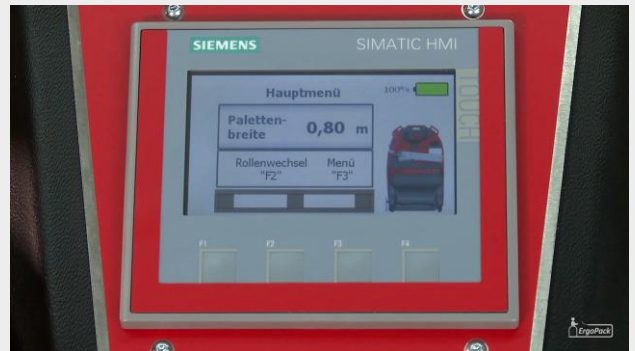

SLEDGE

- Standard sledge 85 included
- For clearance height >95mm





ERGOPACK 700X-LI

OPTIONAL ACCESSORIES

ERGOPACK 700X-LI

ADDITIONAL OPTIONS AND ACCESSORIES

TOOL-LIFT

- Standard for pallets >80cm
- Sealing head quick release included
- [Video](#)




SEALING HEAD

- Sealing head installed and mounted on system



SLEDGE

- 47 for pallets with a clearance height of 55mm to 95mm
- 47S for pallets with narrow entry, 160mm in width
- 47L extended skid for lower runner heights of up to 40mm



ERGOPACK 700X-LI

ADDITIONAL OPTIONS AND ACCESSORIES

TRIPLEX-TOOL-LIFT (TTL)

- Ideal for pallets lower than 80cm
- Suitable for pallets as low as 10cm in height
- [Video](#)



SEALING HEAD REMOVABLE FROM TTL

- Adapter to release the sealing head from the Tool-Lift



LINE LASER

- For optimal system positioning
- [Video](#)



ERGOPACK 700X-LI

ADDITIONAL OPTIONS AND ACCESSORIES

STRAP-BRAKE-RELIEF

- For pallets higher than 120cm
- Relief in pulling out strap
- [Video](#)



HEAD PIECE WITH BUMPER

- For pallets with an overhang of max. 40mm
- Bumper to pass the overhang
- [Video](#)



EASY MOVE ASSISTANT

- For easier handling of machine
- More ergonomic for longer distances



ERGOPACK 700X-LI

ADDITIONAL OPTIONS AND ACCESSORIES

MOBILE OVERHEIGHT MODULE

- For pallets higher than 230cm
- Up to 305cm
- [Video](#)



MOBILE SLEDGE TUNNEL

- Goods strapped on scantlings
- One pair includes two tunnels
- [Video](#)



STATIONARY SLEDGE TUNNEL

- Adjustable sledge tunnel for different widths
- [Video](#)



ERGOPACK 700X-LI

ADDITIONAL OPTIONS AND ACCESSORIES

MORE CHAIN IN SYSTEM

- Up to 2m extra, 8m in total




SPARE BATTERY

- Optimal for multiple shifts



SCREEN PROTECTOR

- Protect the display from damages



ERGOPACK 700X LI

APPLICATION EXAMPLES

