
THIRD ANGLE PROJECTION

		REVISIONS			
REV	ECN No.	DESCRIPTION	DATE		AUTH
OR	ECO-004039	NEW RELEASE	09/18/20	ITG	IL

SUGGESTED MOUNTING CONFIGURATION FOR JV2579 CASE STYLE

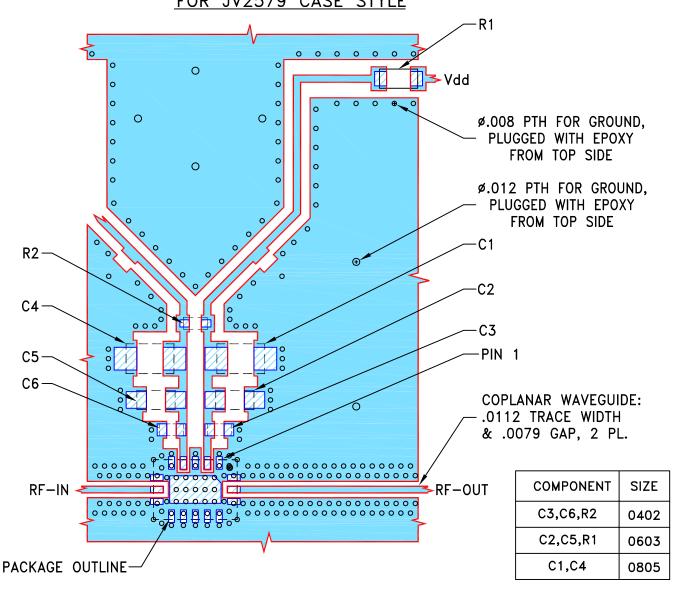

NOTES:

- 1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .0066±.0007". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
- 2. CHIP COMPONENT FOOT PRINTS SHOWN FOR REFERENCE. FOR COMPONENT VALUES REFER TO TB-PMA-183LNC+.
- 3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED	INITIALS		DATE									
DIMENSIONS ARE IN INCHES	DRAWN	ITG	09/15/20	Mini-Circuits® 13 Neptune Avenue Brooklyn NY 11235							iue	
TOLERANCES ON: 2 PL DECIMALS ±	CHECKED	GF	09/15/20		Brooklyn N1 112							.30
3 PL DECIMALS ± .005 ANGLES ±	APPROVED	IL	09/15/20									
FRACTIONS ±				PL, JV2579, TB-PMA-183LNC+								
Mini−Circuits ®					,		,				-	
THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE , MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS. ASHEETA1.DWG REV:A DATE:01/12/95					1554		DRAWING NO: 98-PL-691 REV:					OR
					98PL6	91	SCALE:	6:1	SHEET:	1	OF	1