High Frequency Ceramic Solutions

868 MHz Low Pass Filter

P/N 0868LP15A020

Detail Specification: 06/04/09

Page 1 of 2

General Specifications


Part Number	0868LP15A020
Frequency (MHz)	858~878
Insertion Loss	0.50 max.
Return Loss	14.0 dB min.
Attenuation (min.)	30 dB @ 2 x fo
Attenuation (min.)	40 dB @ 3 x fo

Input Power	2W max.	
Impedance	50 Ω	
Operating Temperature	-40 to +85°C	
Storage Temperature	+5 ~ +35 °C, 12 mos max. Humidity 45~75%RH	
Reel Quanity	4,000	

P/N Suffix	Packaging	Bulk	Suffix = S	Eg. 0868LP15A020S
	Style	T&R	Suffix = E	Eg. 0868LP15A020E
	Termination Style	100% Tin	Suffix = None	Eg. 0868LP15A020(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 0868LP15A020(E or S)/Pb

Mechanical Dimensions

	ln	mm	
L	0.079 ± 0.004	2.00 ± 0.10	а
W	0.049 ± 0.004	1.25 ± 0.10	
Т	0.037 ± 0.004	0.95 ± 0.10	
а	0.012 ± 0.004	0.30 ± 0.10	
b	0.008 ± 0.004	0.20 ± 0.10	
С	0.012 +.004/008	0.30 +0.1/-0.2	
g	0.014 ± 0.004	0.35 ± 0.10	١.
р	0.026 ± 0.002	0.65 ± 0.05	ı



Terminal Configuration

No.	Function	
1	GND	
2	NC	
3	GND	
4	OUT	
5	GND	
6	NC	
7	GND	
8	IN	
4	3 2 1	

Mounting Considerations

Mount these devices with brown mark facing up.
Line width should be designed to provide 50 Ω impedance matching characteristics.

DC Blocking capacitor is connected in series at each In/Out Port.

Units: mm

Solder Resist

Land

Through-hole (φ 0.3)

DC Blocking Capacitor

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



High Frequency Ceramic Solutions


868 MHz Low Pass Filter

P/N 0868LP15A020

Detail Specification: 06/04/09

Page 2 of 2

Typical Electrical Performance (T=25°C)

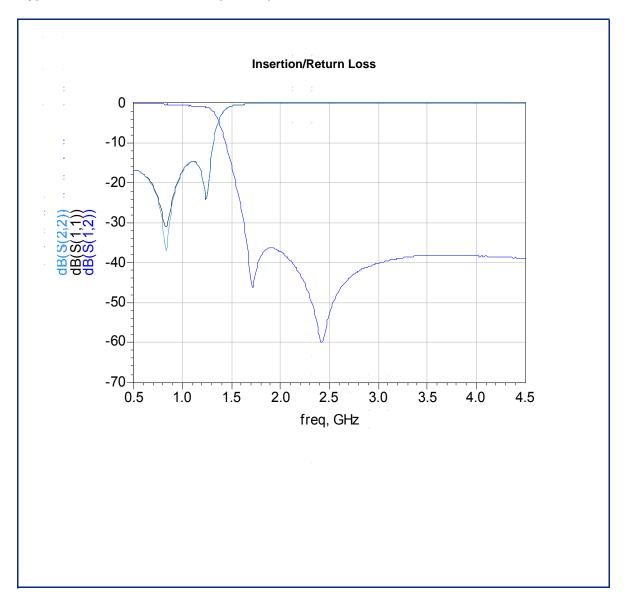

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

