"High Frequency Ceramic Solutions"

915 MHz Low Pass Filter

P/N 0915LP15B026

Detail Specification: 10/09/2015

Page 1 of 2

General Specifications

- chicken opening				
Part Number	0915LP15B026			
Frequency (MHz)	902 - 928			
Insertion Loss	0.5 dB max.			
Return Loss	14.0 dB min.			
Attenuation (min.)	30 @ 2 x fo			
Attenuation (min.)	30 @ 3 x fo			

Input Power	3 Watts max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Reel Quanity	4000


Packagii P/N Style	Packaging	Bulk (loose)	Suffix = S	Eg. 0915LP15B026S
	Style	T&R	Suffix = E	Eg. 0915LP15B026E (Embossed Tape)
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 0915LP15B026(E or S)
	Evaluation Board	0915LP15B026-EB-SMA (2-Port SMA EVB)		

Terminal Configuration

reminal configuration			
No.	Function		
1	GND		
2	NC		
3	GND		
4	I/O		
5	GND		
6	NC		
7	GND		
8	I/O		
4	3 2 1		

Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
Т	0.033 ± 0.004	0.85 ± 0.10
а	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
С	0.012 +.004/008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
р	0.026 ± 0.002	0.65 ± 0.05



Mounting Considerations

Mount these devices with brown mark facing up.

*Line width should be designed to provide 50Ω impedance matching characteristics.

*DC Blocking capacitor is connected in series at each In/Out Port.
Units: mm

Solder Resist

Land

DC Blocking Capacitor

Through-hole (φ0.35)

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



"High Frequency Ceramic Solutions"


915 MHz Low Pass Filter

P/N 0915LP15B026

Detail Specification: 10/09/2015

Page 2 of 2

Typical Electrical Performance (T=25°C)

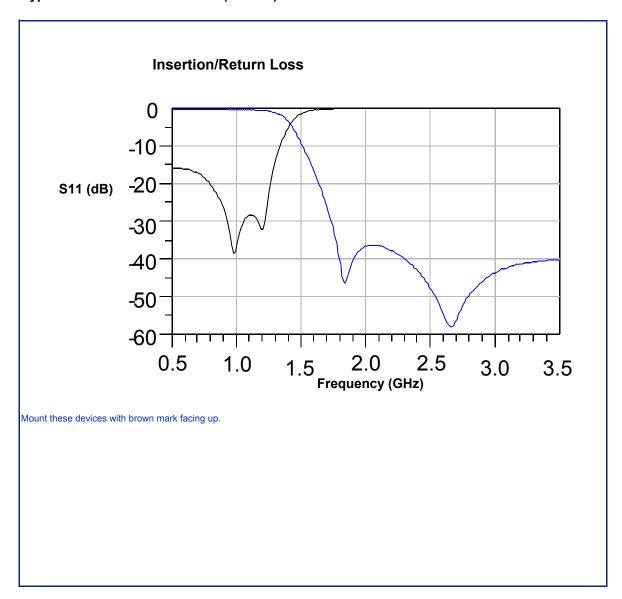

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.

