
Tennis Court Dew Cover: Specification for Quote

Sleepy Hollow Swim & Tennis Club, 1 Sunnyside Lane, Orinda, CA 94563, USA · Contact: Darrin Cohen

Purpose: We cover the back 30 ft of an outdoor hard tennis court at night so it does not get wet from dew. In the morning, staff roll it up against the fence in about 2 minutes. Each cover is made as **2 panels** that join together, because each panel has to be light enough for 1–2 people to handle every day.



Product concept

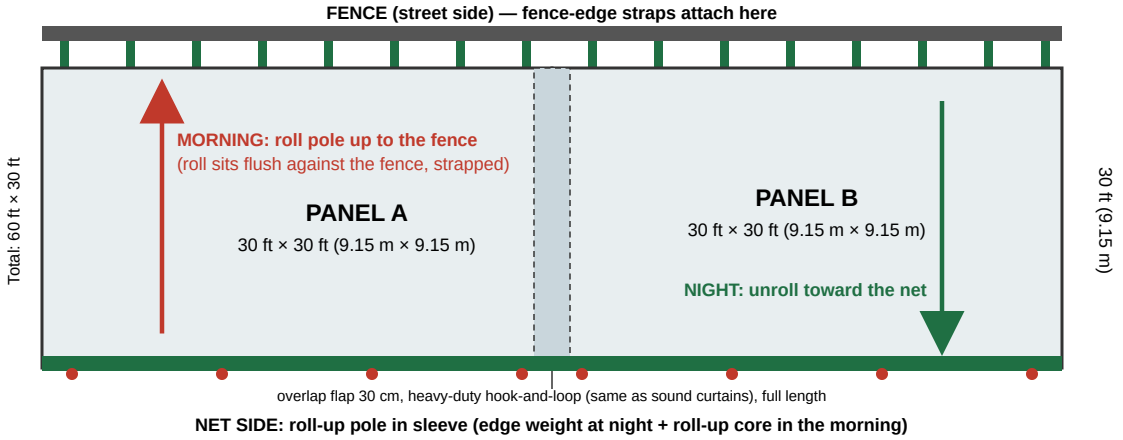

Concept render: cover out at sunrise (main) · rolled and strapped to the fence (inset)

Specification (per panel, 2 panels = 1 cover)

Finished size	30 ft × 30 ft (9.15 m × 9.15 m) per panel. Panel A + Panel B = 60 ft × 30 ft cover.
Material	Waterproof PVC-coated polyester or PE, about **250–300 g/m²**. **Target weight ≤ 25 kg per panel.** UV-stabilized for California sun, anti-mildew, does not crack in cold. Please quote 2 material options with g/m² and finished panel weight.

Color	Top: light grey or white. Bottom: any. Must not leave color or marks on an acrylic hard court.
Perimeter	Hem reinforced with 5 cm (2") polyester webbing on all 4 sides, double stitched with UV-resistant thread.
Fence-edge straps	**Hook-and-loop (velcro) straps, 5 cm wide × 75 cm long, every 60 cm** along the fence edge (about 15 per panel), sewn to the webbing with box-X stitching. Use the **same heavy-duty hook-and-loop as your sound barrier curtains**, outdoor UV-grade. Each **corner** on the fence edge also gets a webbing strap with a plastic side-release buckle as a backup in wind.
Net-side roll-up pole (supplied by you)	A sewn sleeve along the full net-side edge, opening at both ends, **inside diameter 7 cm**. **Please supply the pole too:** a light aluminum pole, about 50 mm diameter, made in sections of 1.5 m or shorter that lock together (push-fit or screw joints) to a total of 9.15 m per panel, with end caps. Sections must ship in the same box. The pole holds the edge down at night, and in the morning the cover rolls up onto it.
Handles	Webbing pull loops every 3 m along the net-side edge, below the sleeve.
Panel join	Panel A has a 30 cm overlap flap along its joining edge, with **the same heavy-duty hook-and-loop you use on your sound barrier curtain joins**, 10 cm wide (or 2 rows of 5 cm), running the full 9.15 m. It mates with a matching strip on Panel B. The joined panels must not pull apart in wind.
Corners	Reinforced patch plus a brass or stainless grommet at all 4 corners (for optional weights).

How it works

1. **Evening:** Unroll from the fence toward the net. Velcro the fence-edge straps through the chain-link or around the bottom rail. The pole in the sleeve holds the net-side edge down.
2. **Morning:** Undo the straps, then roll the pole toward the fence so the cover winds onto it. At the fence, wrap the **same straps** around the roll and the fence to store it. One set of straps does both jobs.

Please quote: (1) price per **complete cover** (2 panels + 2 poles + all straps, everything included) at quantity **2, 4 and 8 covers**, for each material option; (2) finished weight per panel; (3) photos of the material and the hook-and-loop strap you would use; (4) production time; (5) DDP shipping to 1 Sunnyside Lane, Orinda, CA 94563. A **sample** of the strap + hem + sleeve + pole section would be great before full production.