Single Supply, Rail-to-Rail Output Single Operational Amplifier

■GENERAL DESCRIPTION

NJM2741 is a low noise Rail-to-Rail Output single operational amplifier.

Rail-to-Rail Output function provides wide dynamic range, is from ground to power supply level. And Input range rails from ground level.

It is suitable for audio section of portable sets, PCs and any General-purpose applications.

■PACKAGE OUTLINE

NJM2741F

NJM2741F3

■ FEATURES

●Operating Voltage	2.5V to 14V
●Rail-to-Rail Output	V_{OH} ≥4.9V Typ. (at V^+=5V, R_L=5kΩ)
	V_{OL} ≤0.1V Typ. (at V^+=5V, R_L=5kΩ)
●Offset Voltage	1mV Typ.
●Slew Rate	3.5V/μs Typ.
●Low Distortion	0.001% Typ. (at V^+=5V, f=1kHz)
●Low Input Voltage Noise	10nV/√Hz Typ. (at f=1kHz)
●Bipolar Technology	
●Package Outline	SOT−23−5, SC88A

■ PIN CONFIGURATION



NJM2741F
NJM2741F3
(Top View)

PIN FUNCTION

1. +INPUT
2. GND
3. -INPUT
4. OUTPUT
5. V^+

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	15	V
Differential Input Voltage Range	V_{ID}	±15 (Note1)	V
Common Mode Input Voltage Range	V_{ICM}	0 to 15 (Note1)	V
Power Dissipation	P_D	390[SOT−23−5] (Note2) 280[SC88A] (Note2)	mW
Operating Temperature Range	T_{opr}	-40 to +85	˚C
Storage Temperature Range	T_{stg}	-50 to +125	˚C

(Note1) For supply voltage less than 15V, the absolute maximum input voltage is equal to the supply voltage.

(Note2) On the PCB " EIA/JEDEC (76.2×114.3×1.6mm, two layers, FR-4) "

■ OPERATING VOLTAGE (Ta=25˚C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	2.5 to 14	V

■ ELECTRICAL CHARACTERISTICS

●DC CHARACTERISTICS (V^+=5V,Ta=25˚C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I_{CC}	R_L=∞, V_{IN}=2.5V, No Signal Apply	-	2.2	3.3	mA
Input Offset Voltage	V_{IO}	R_S ≤ 10kΩ	-	1	6	mV
Input Bias Current	I_B		-	100	350	nA
Input Offset Current	I_{IO}		-	5	100	nA
Large Signal Voltage Gain	A_V	R_L≥10kΩ to 2.5V, Vo=0.5V to 4.5V	65	85	-	dB
Common Mode Rejection Ratio	CMR	0V ≤ V_{CM} ≤ 4V	60	75	-	dB
Supply Voltage Rejection Ratio	SVR	V^+=2.5V to 14V, V_{CM}=V^+/2	60	80	-	dB
Output Voltage	V_{OH}	R_L=5kΩ to 2.5V	4.75	4.9	-	V
	V_{OL}	R_L=5kΩ to 2.5V	-	0.1	0.25	V
Input Common Mode Voltage Range	V_{ICM}	CMR ≥ 60dB	0	-	4	V

●AC CHARACTERISTICS (V^+=5V,Ta=25˚C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	f=10kHz, R_L=10kΩ to 2.5V	-	10	-	MHz
Phase Margin	Φ_M	R_L=10kΩ to 2.5V, C_L=10pF	-	75	-	Deg
Equivalent Input Noise Voltage	V_{NI}	f=1kHz, V_{CM}=2.5V	-	10	-	nV/√Hz
Total Harmonic Distortion	THD	f=1kHz, A_V=+2 R_L=10kΩ to 2.5V, Vo=1.5Vrms	-	0.001	-	%

●AC CHARACTERISTICS (V^+=5V,Ta=25˚C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	(Note 3), A_V=1, V_{IN}=2Vpp R_L=10kΩ to 2.5V, C_L=10pF	-	3.5	-	V/μs

(Note 3) Number specified is the slower of the positive and negative slew rates.

■ Typical Characteristics

Supply Current vs. Supply Voltage
(Temperature)
G_V=0dB

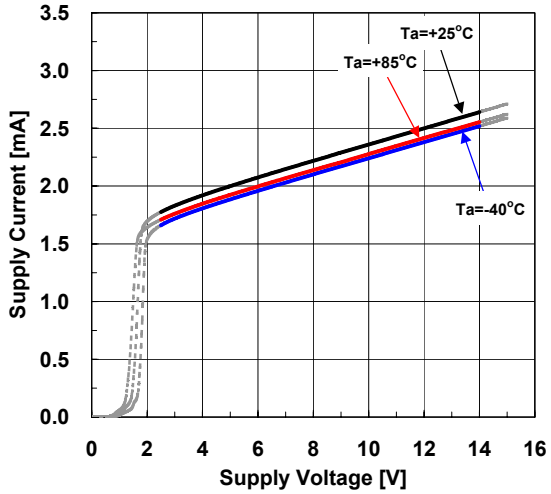

Supply Current vs. Ambient Temperature
(Supply Voltage)
G_V=0dB

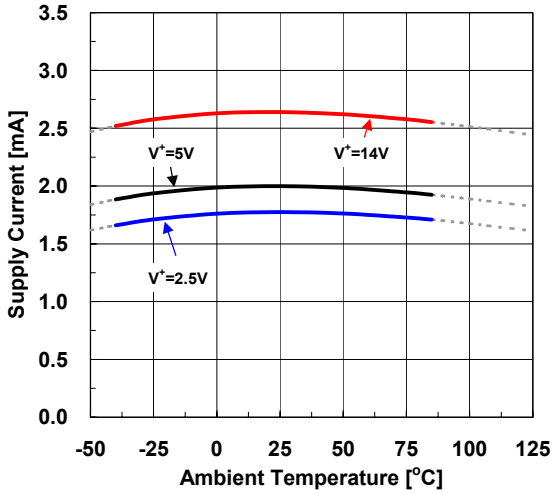

Input Offset Voltage vs. Supply Voltage
(Temperature)
R_L=R_S=10kΩ

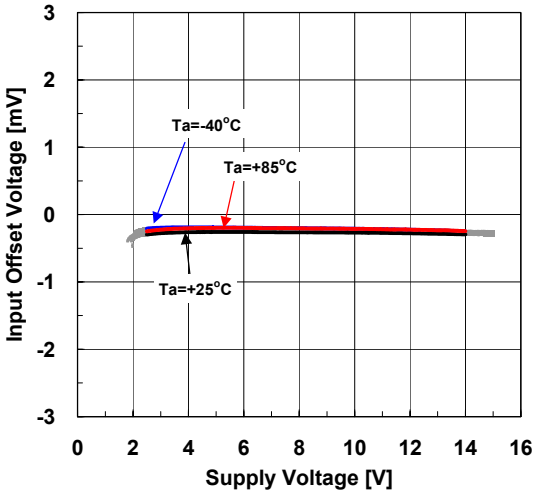

Input Offset Voltage
vs. Ambient Temperature (Supply Voltage)
R_L=R_S=10kΩ

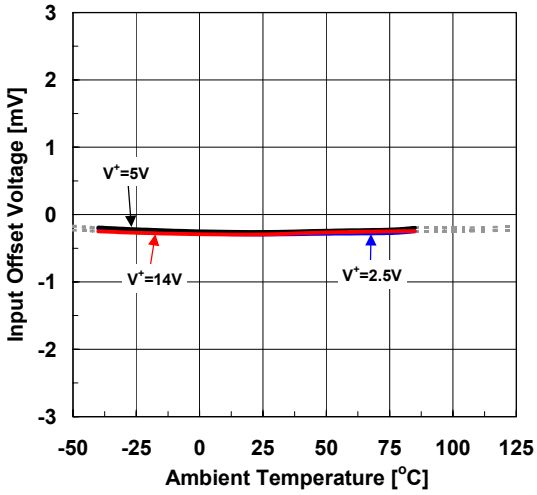

Input Offset Voltage
vs. Input Common Mode Voltage
(Temperature, V^+=5V)
V^+=5V, R_L=10kΩ

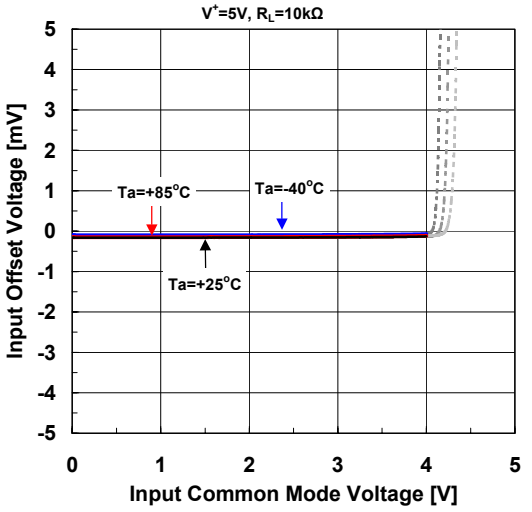

■ Typical Characteristics

Input Bias Current vs. Ambient Temperature
(Supply Voltage)
R_L=10kΩ

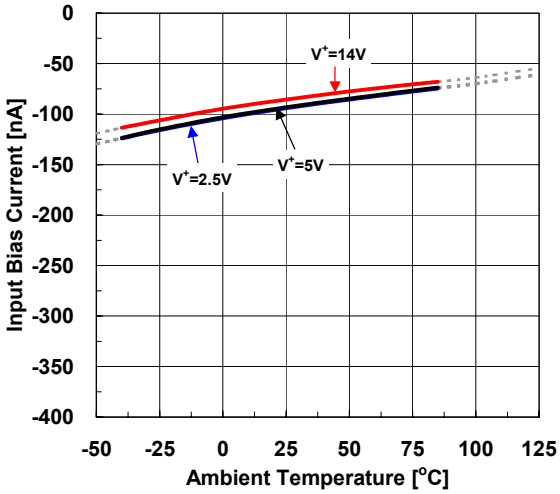

Input Offset Current
vs. Ambient Temperature (Supply Voltage)
R_L=10kΩ

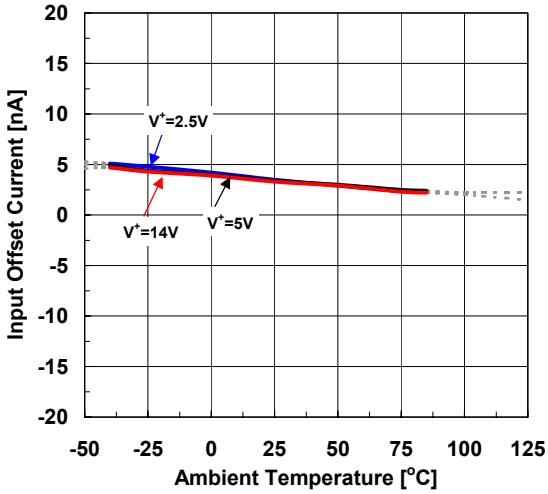

Maximum Output Voltage vs. Supply Voltage
(Temperature, R_L=10kΩ)
G_V=OPEN, R_L=10kΩ

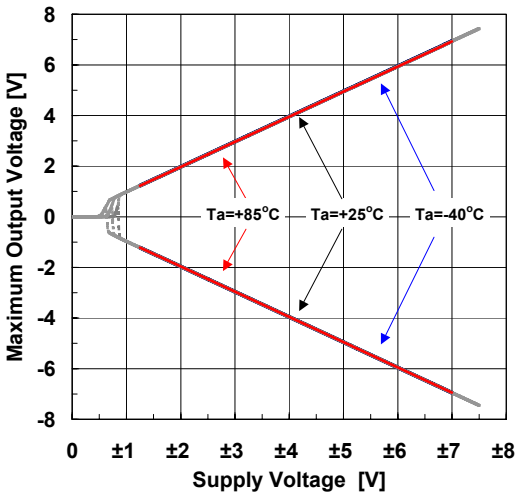

Maximum Output Voltage vs. Supply Voltage
(Temperature, R_L=5kΩ)
G_V=OPEN, R_L=5kΩ

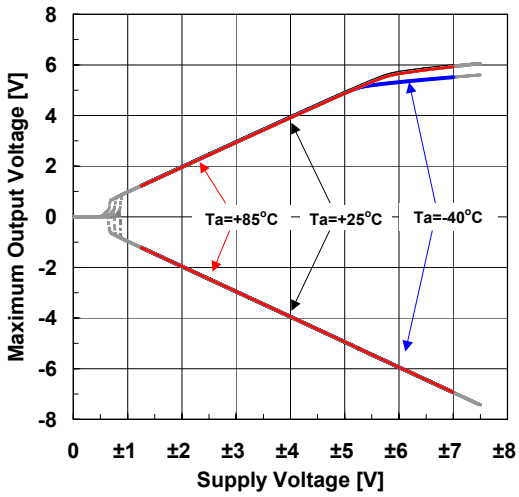

Maximum Output Voltage
vs. Load Resistance
(Ambient Temperature, V+=5V)
V+=5V, G_V=OPEN

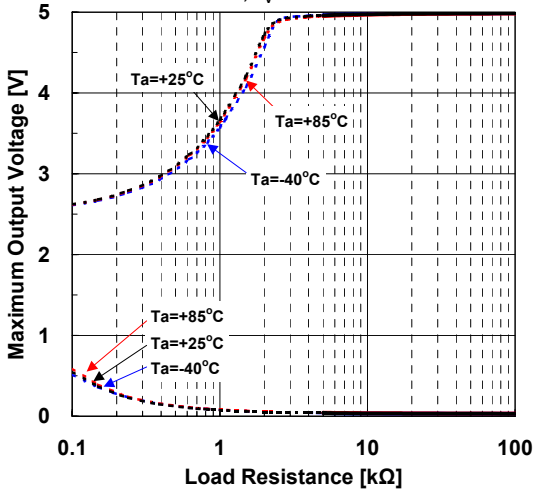

Maximum Output Voltage vs. Output Current
(Temperature, V+=5V)
V+=5V,G_V=OPEN

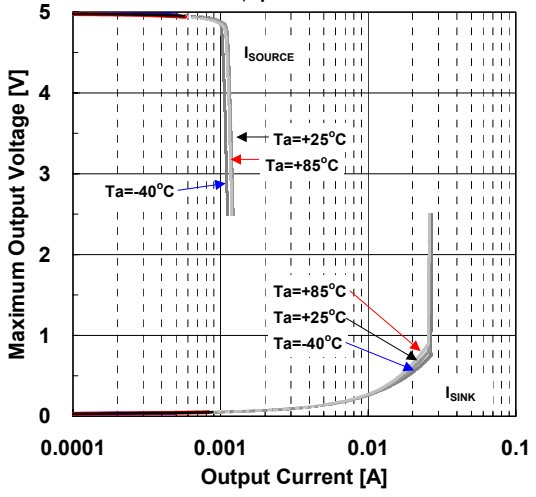

■ Typical Characteristics

Maximum Output Voltage
vs. Ambient Temperature
(Supply Voltage, R_L=10kΩ)
G_V=OPEN, R_L=10kΩ

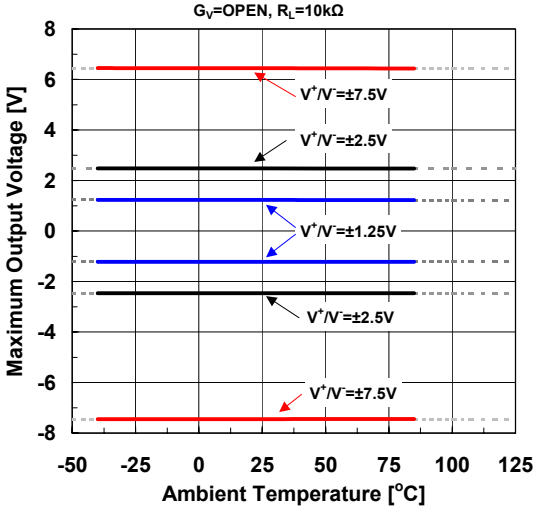

Maximum Output Voltage
vs. Ambient Temperature
(Supply Voltage, R_L=5kΩ)
G_V=OPEN, R_L=5kΩ

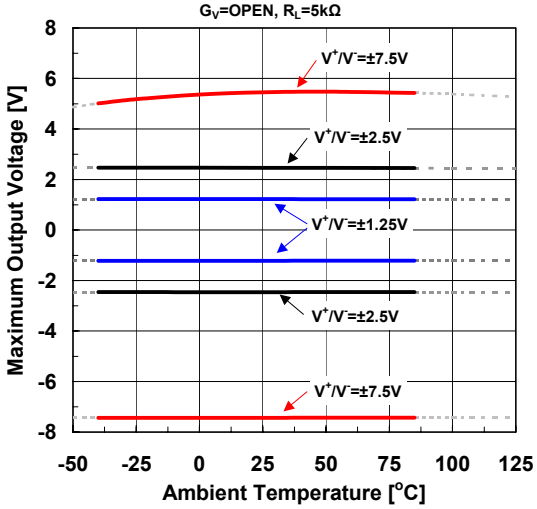

Common Mode Rejection Ratio
vs. Ambient Temperature (Supply Voltage)
R_L=10kΩ, 0V ≤ V_{ICM} ≤ V^+-1V

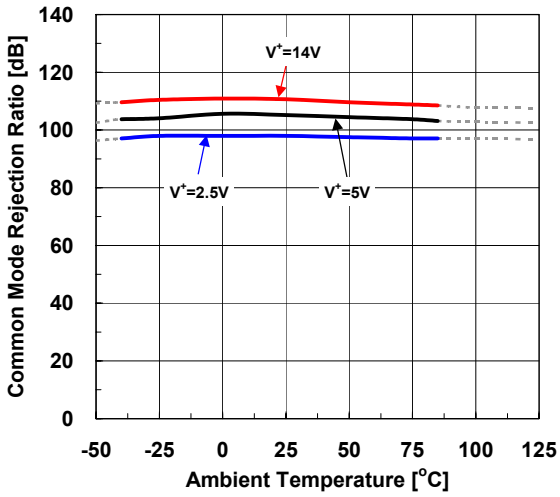

Supply Voltage Rejection Ratio
vs. Ambient Temperature
R_L=10kΩ, 2.5V ≤ V^+ ≤ 14V

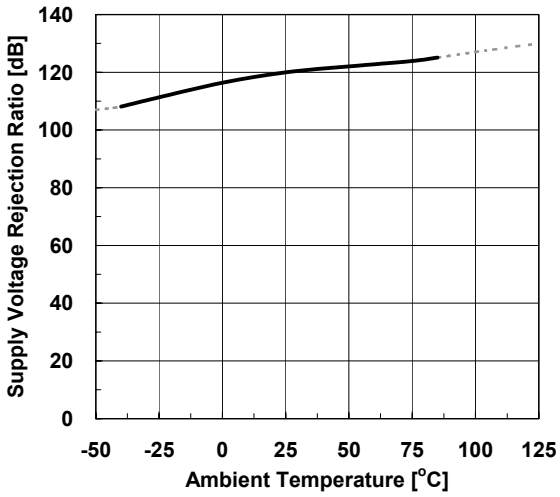

■ Typical Characteristics

Gain/Phase vs. Frequency (capacitive Load)

V^+=5V, V_{IN}=-30dBm, G_V=40dB, R_T=50Ω, R_F=10kΩ, R_G=100Ω, Ta=25°C

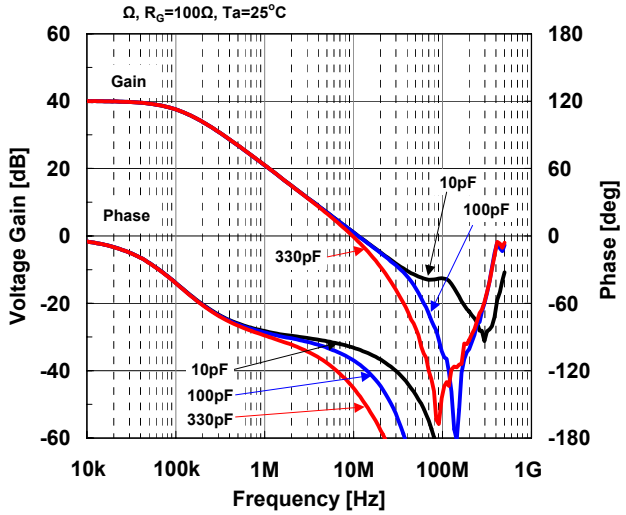

Gain/Phase vs. Frequency (Temperature)

V^+=5V, V_{IN}=-30dBm, G_V=40dB, R_T=50Ω, R_F=10kΩ, R_G=100Ω, C_L=10pF

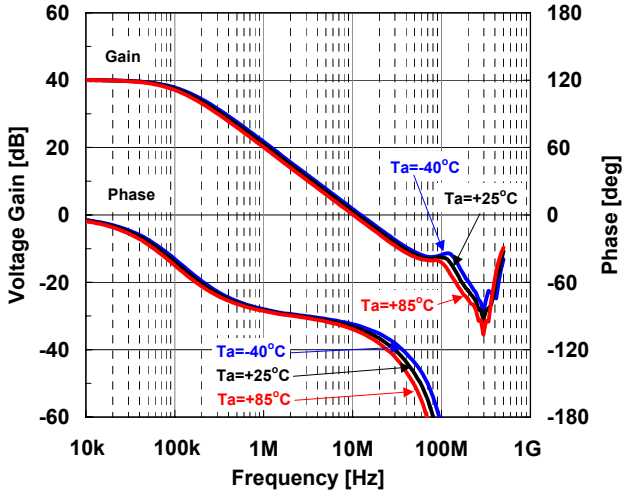

Phase Margin vs. Load Capacitance
(Supply Voltage)

V_{IN}=-30dBm, G_V=40dB, R_T=50Ω, R_F=10kΩ, R_G=100Ω, Ta=25°C

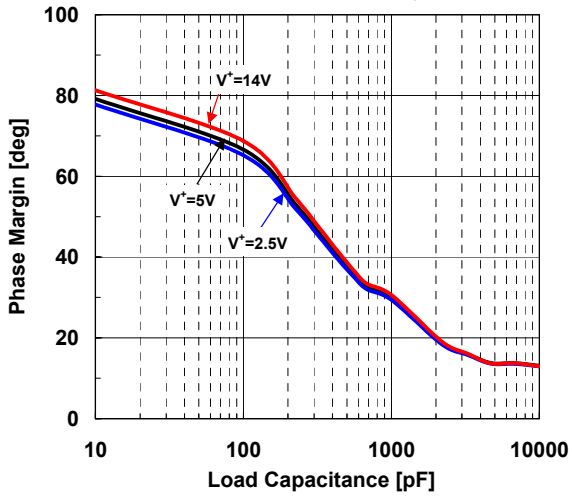

Phase Margin vs. Load Capacitance
(Temperature)

V+=5V, V_{IN}=-30dBm, G_V=40dB,RT=50Ω, R_F=10kΩ, R_G=100Ω

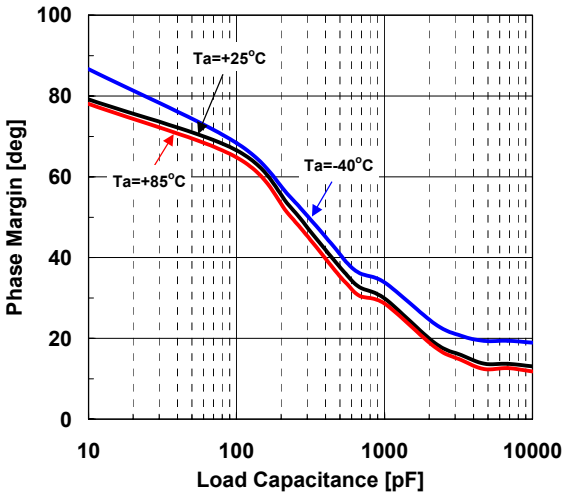

Pulse Response
(Ambient Temperature, V^+/V^-=±2.5V)

V^+/V^-=±2.5V, V_{IN}=1Vpp, A_V=+1, R_L=10kΩ, C_L=10pF

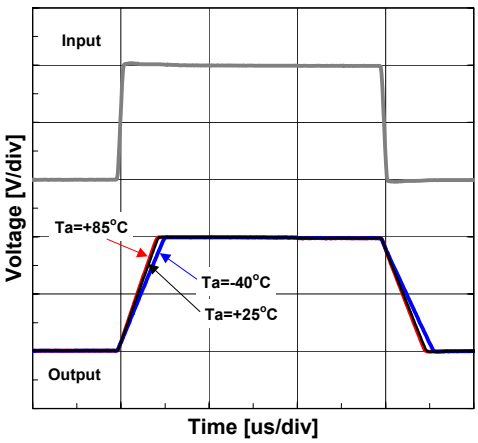

Pulse Response
(Load Capacitance, V^+/V^-=±2.5V)

V^+/V^-=±2.5V, V_{IN}=1Vpp, A_V=+1, R_L=10kΩ, Ta=25°C

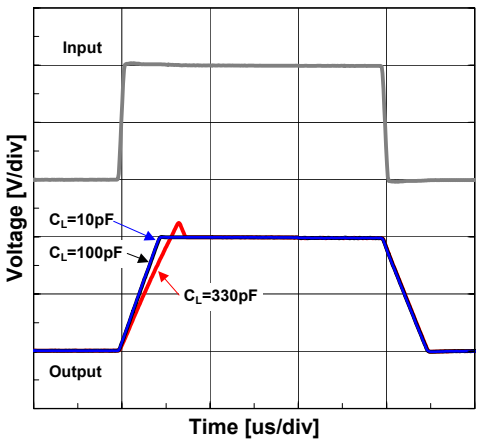

■ Typical Characteristics

THD+N vs. Output Voltage (Frequency)

V^+=5V, A_V=+2, R_S=600kΩ, R_F=5kΩ, R_G=5kΩ
BPF=100Hz:10-80kHz, Ta=25°C

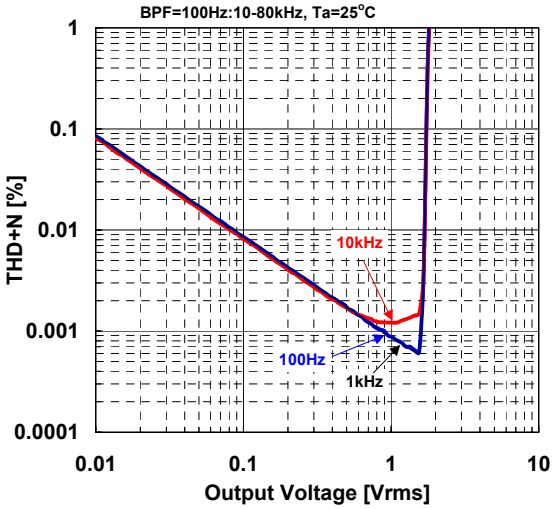

THD+N vs. Output Voltage (Supply Voltage)

f=1kHz, A_V=+2, R_S=600Ω, R_F=5kΩ, R_G=5kΩ,
BW=10Hz~80kHz, Ta=25°C

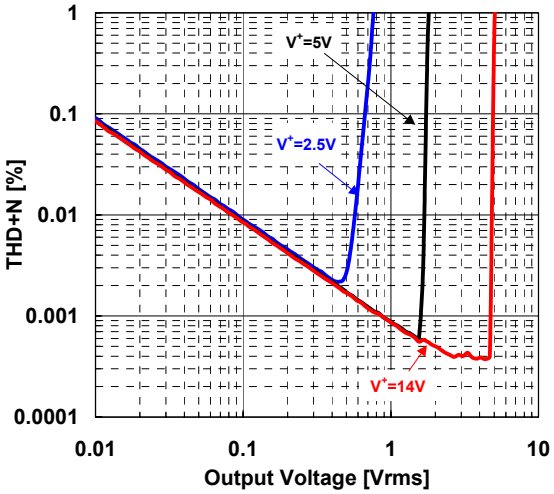

Equivalent Input Noise Voltage vs. Frequency (Supply Voltage)

G_V=60dB, R_T=600Ω, R_F=100kΩ, R_G=100Ω, Ta=25°C

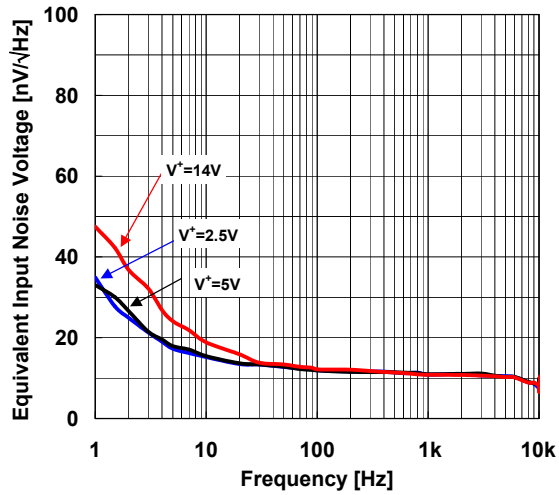

Equivalent Input Noise Voltage vs. Signal Source Resistance (Supply Voltage)

f=1kHz, GV=60dB, RF=100kΩ, RG=100Ω, Ta=25°C

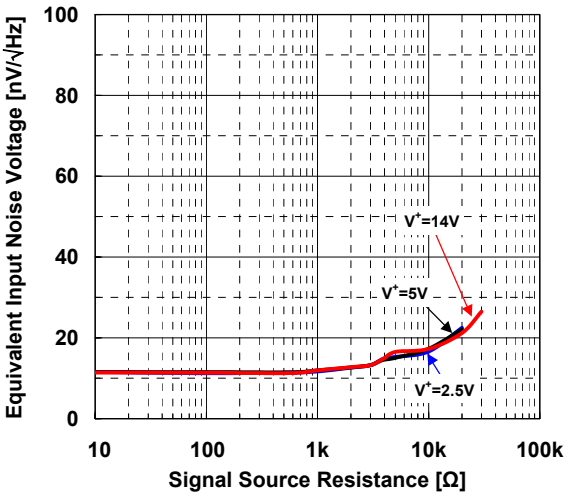

■ MEMO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

NJM2741F-TE1