




USB Connection and renumeration circuitry

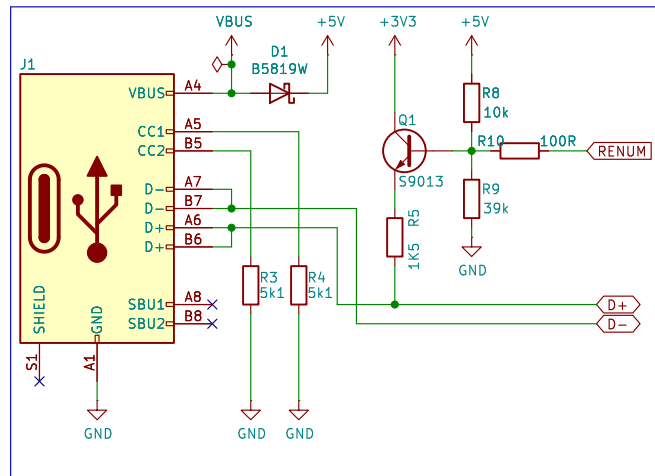


Power Supply

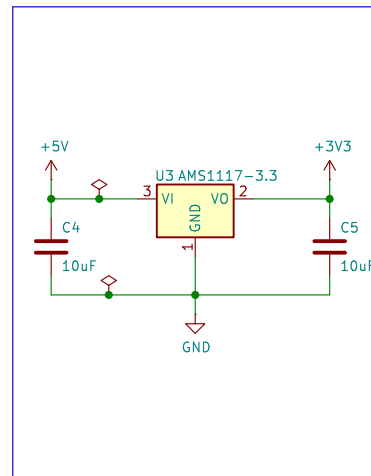


Decoupling

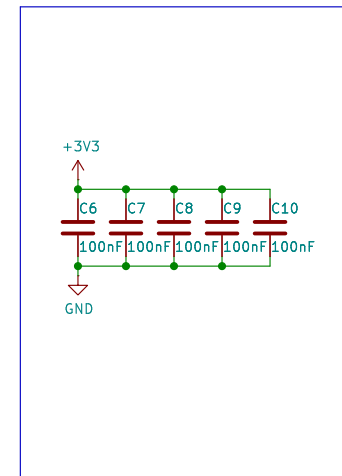

Programming Pins

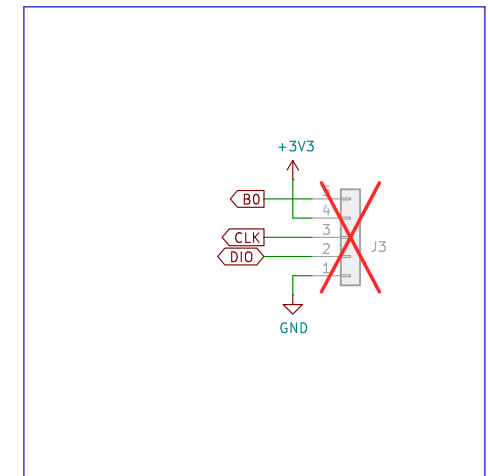


MCU

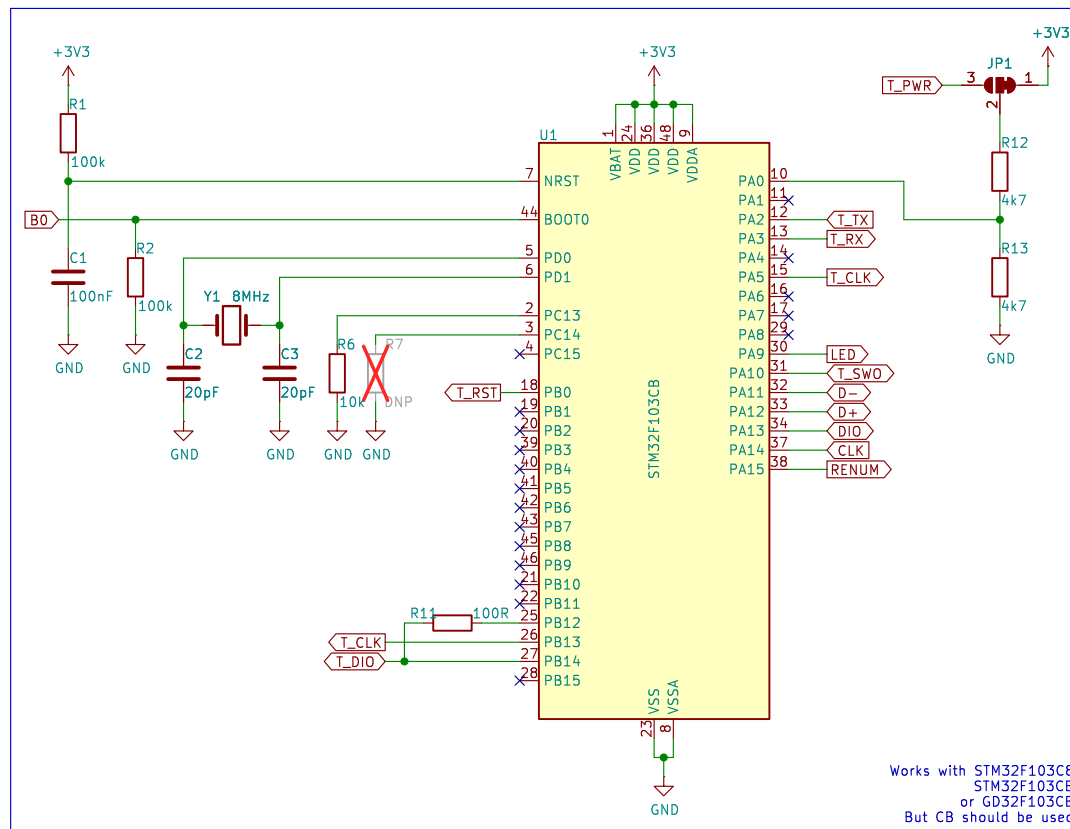


Works with STM32F103CB
STM32F103CB
or GD32F103CB
But CB should be used



Two-color LED

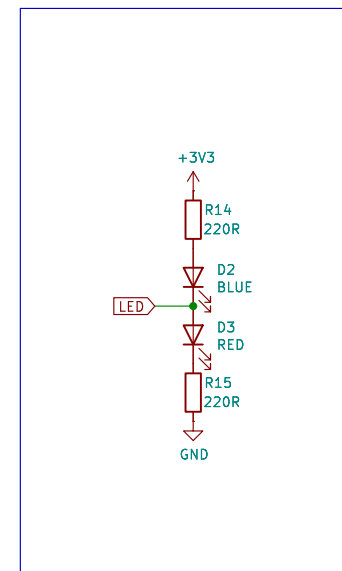

Target Header

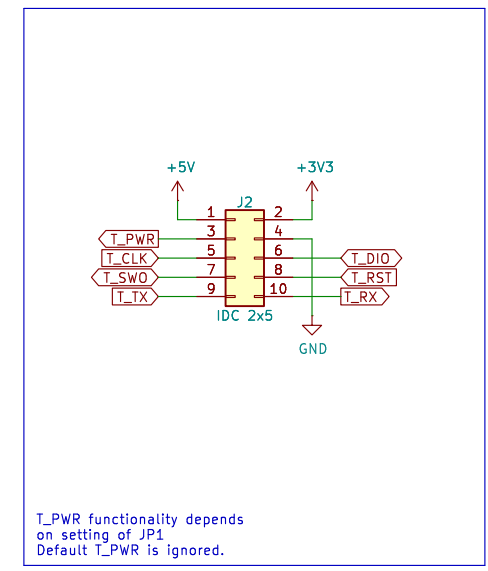

T_PWR functionality depends
on setting of JP1
Default T_PWR is ignored.

lth@currentmakers.com
Lars Boegild Thomsen
[https://stm32world.com/wiki/DIY_STM32_Programmer_\(ST-Link/V2-1\)](https://stm32world.com/wiki/DIY_STM32_Programmer_(ST-Link/V2-1))
CurrentMakers.com

Sheet: /
File: stlink.kicad_sch

Title: STM32 Programmer 2

Size: A4
KiCad E.D.A. 9.0.4

Date:

Rev: a
Id: 1/1