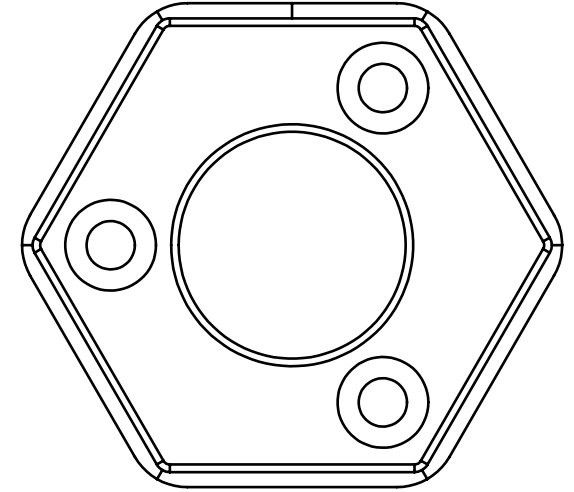
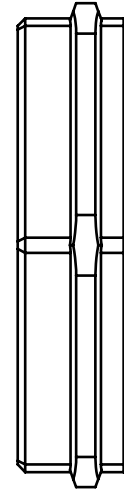


0-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000
±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

$$\pm 0.1 \quad \pm 0.2 \quad \pm 0.3 \quad \pm 0.5 \quad \pm 0.8 \quad \pm 1.2$$

未注角度

 $\pm 1^\circ$ 

技术要求:

1. 其余未注尺寸见3D模型；
2. 未注形位公差按GB/T1184-K级；
3. 表面无明显划伤、刮痕、无生锈、无氧化皮等；
4. 边角去毛刺倒钝；
5. 未注机加面Ra3.2；
6. 未注倒角C0.5；
7. 喷砂150目，本色阳极氧化，厚度>15um。



6061 合金

广州灵动方程科技有限公司

质量/Kg