


当前12种PCB：按同一比例查看外形与器件占位


淡蓝 = 原生封装包围框（不含文字）；棕色 = 焊盘；白色 = 非金属化孔。图中未绘铜区、插头与线束包络。

舵机主电源

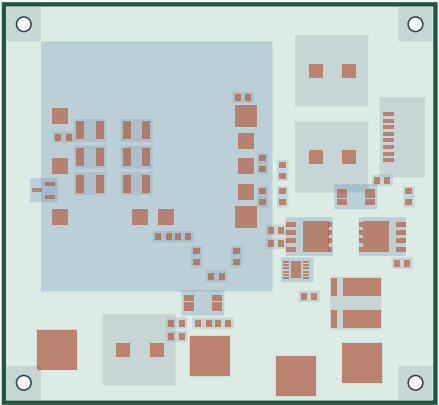


65 × 60 mm · 3900 mm² / 块

5V电源与监测

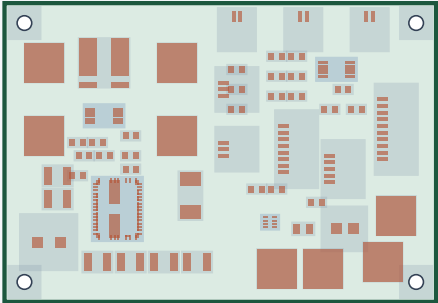


65 × 45 mm · 2925 mm² / 块

RK3576核心板载板

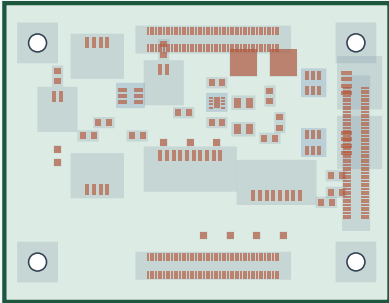


58 × 45 mm · 2610 mm² / 块

腿部配电 ×2




40 × 36 mm · 1440 mm² / 块

头部配电




40 × 25 mm · 1000 mm² / 块

回生控制




32 × 30 mm · 960 mm² / 块

主保险




30 × 25 mm · 750 mm² / 块

功放




28 × 20 mm · 560 mm² / 块

姿态传感器




24 × 18 mm · 432 mm² / 块

麦克风




20 × 14 mm · 280 mm² / 块

65°C温保



16 × 12 mm · 192 mm² / 块

75°C温保



16 × 12 mm · 192 mm² / 块

13块总板框面积 16681 mm² (166.81 cm²) 。图示空白不等于可裁切空间；没有改变PCB或安装接口。