


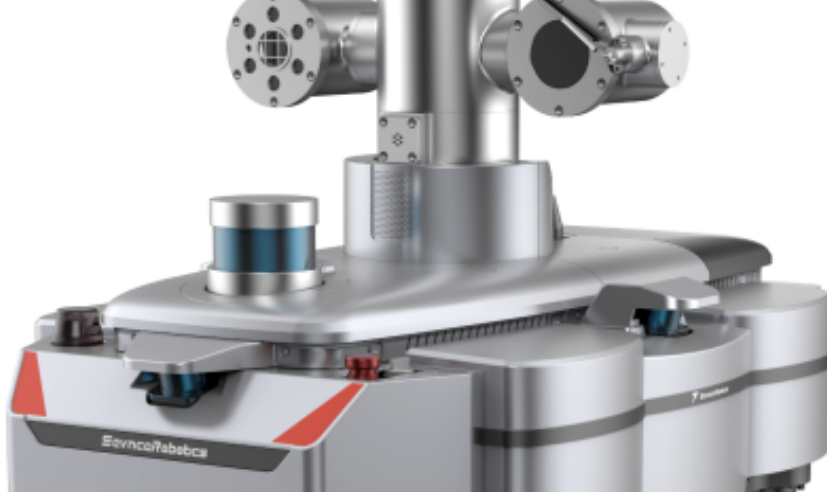

Explosion-Proof Wheeled Robot — L3

/ SevnceRobotics

■ Product Overview

Built on a modular design that balances compactness with light weight, the L3 uses independent sealed compartments and quick-maintenance interfaces to speed up field servicing. Rich expansion interfaces let sensor modules be freely configured, and an integrated one-piece pan-tilt gimbal delivers one machine, multiple uses. Four-wheel, eight-drive propulsion gives strong terrain adaptability across complex industrial environments.

■ Features and Capabilities

Dimensions	≤ 1010 × 650 × 1070 mm (L×W×H)	Climbing Ability	≤ 25°
Weight	≤ 180 kg (subject to actual product)	Obstacle Crossing Height	≤ 9 cm
Explosion-Proof Rating	Ex IIC T6 Gb	Wading Ability	≤ 9 cm
Protection Rating	IP66	Operating Temperature	-20°C to +60°C
Drive Method	Four-Wheel, Eight-Drive	Charging Time	≤ 2 h
Straight-Line Speed	≤ 1.0 m/s	Battery Life	≥ 3 h
Braking Distance	≤ 0.5 m	Navigation	Laser SLAM + IMU
Turning Diameter	120 cm	Positioning Accuracy	≤ ±5 cm

■ Standard Features

Autonomous Obstacle Avoidance	Emergency Stop	Auto-Charging
Auxiliary Lighting	Status Indicator	Audio-Visual Alarm
Edge Computing	Autonomous Inspection	Voice Intercom
Voice Broadcast	Voice Interaction	Live Monitoring

Video Surveillance	Self-Check	One-Key Return
Offline Patrol	Monitoring Backend	Fault Diagnosis
Modular Maintenance		

Optional Functions

Laser Telemetry	Laser Vibration Sensing	Optical Imaging
Acoustic Imaging	Acoustic Fingerprint Detection	Noise Detection
Flame Detection	Elevating Gimbal	BeiDou Navigation
Robotic Arm		