




Blackout Instructions





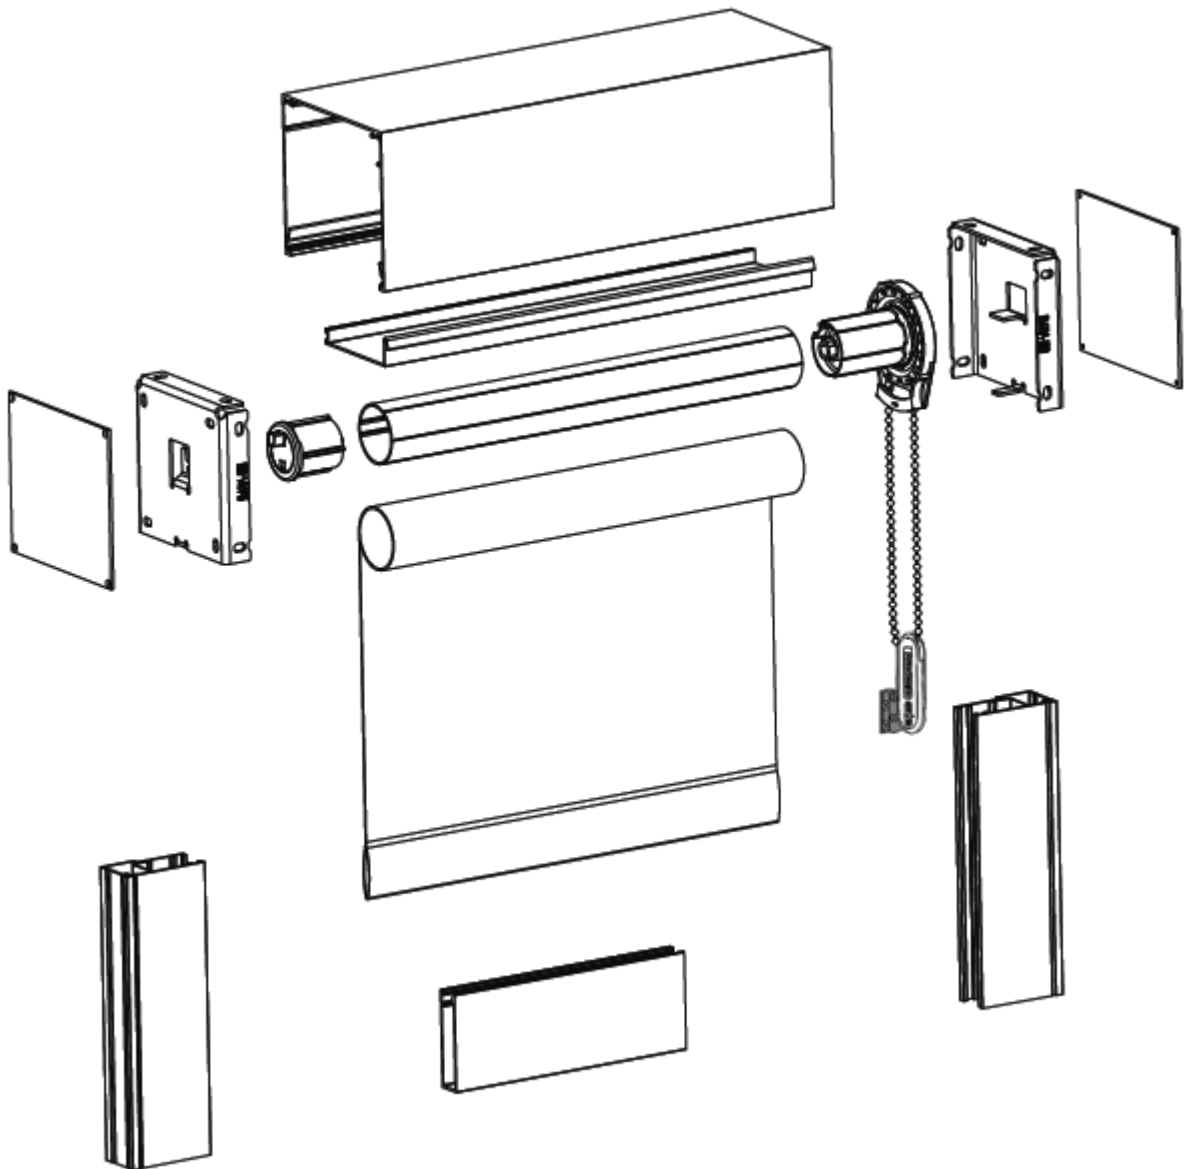


4" R-Series Pocket Installation – Outside Mount



| | |
|---|----------------------|
| <i>Components Needed</i> | <i>page 3</i> |
| <i>Tools Needed</i> | <i>page 4</i> |
| <i>System Diagram</i> | <i>page 5</i> |
| <i>Instructions</i> | |
| Step 1: Install Pocket. | Page 6 |
| Step 2: Install Brackets | Page 6 |
| Step 3: Install End Plates | Page 7 |
| Step 4: Mount Back Side Channels | Page 7 |
| Step 5: Install Shade | Page 8 |
| Step 6: Install Bottom Channel | Page 9 |
| Step 7: Install Front Side Channel | Page 9 |
| Step 8: Install Bottom Closure | Page 10 |
| Step 9: Install Tension Device | Page 11 |
| Installed Shade | Page 11 |
| Child Safety | Page 12 |
| Warranty | Page 13 |

Blackout Instructions

4" R-Series Pocket Installation Instructions

| Quantity | Description | Image |
|----------|---|--|
| 1 | 4" Roller shade assembled to tube with clutch and idler inserted. |  |
| 2 | 4" R-Series Fascia Brackets |  |
| 2 | End Plates |  |
| 1 | 4" Pocket |  |
| 1 | Bottom Closure |  |
| 2 | Front & Back Side Channels |  |
| 1 | Bottom Channel |  |


Blackout Instructions

4" R-Series Pocket Installation Instructions

Tools Needed

| |
|-------------------------|
| Screwdriver/Power Drill |
| 1/16" Metal Drill Bit |
| Screws |
| Hammer/Mallet |
| Measuring Tape |
| Level |
| Ladder |
| Chisel |
| Center Punch |
| Eye Protection |
| Gloves |

System Diagram

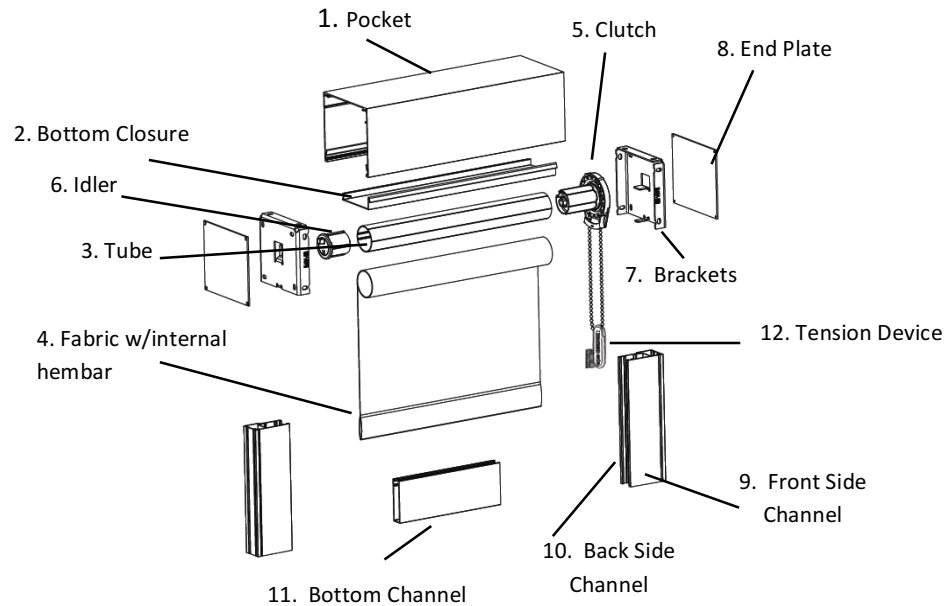

| | |
|-----------|------------------------------------|
| 1 | 4" Pocket |
| 2 | Bottom Closure |
| 3 | Tube |
| 4 | Fabric with internal Hembar |
| 5 | Clutch |
| 6 | Idler |
| 7 | 4" R-Series Fascia Brackets |
| 8 | 4" End Plates |
| 9 | Front Side Channel |
| 10 | Back Side Channel |
| 11 | Bottom Channel |
| 12 | Tension Device |

Blackout Instructions

4" R-Series Pocket Installation Outside Mount

Step 1: Install Pocket

- 1a. Mark mounting screw hole locations with a center punch (Ceiling Mount Only)
- 1b. Pre-drill mounting holes
- 1c. Mount pocket to wall or ceiling using the appropriate mounting screws

1a.



1b.



1c.



Step 2: Install Brackets

- 2a. Insert Bracket into pocket (may need mallet to gently tap bracket into place) until flush with end of pocket
- 2b. Secure bracket to pocket with supplied mounting screws OR:
- 2c. Secure bracket to pocket by staking pocket channel to bracket with a chisel.

2a.



2b.




2c.



Step 3: Install End Plates

3a. Insert End Plate screws into manufacturers pre-drilled holes in end plate and secure to pocket.

3.

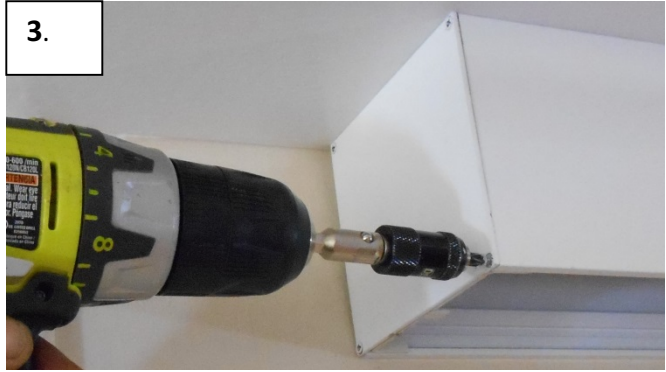

Step 4: Mount Back Side Channels (follow steps for right and left back side channels)

4a. Decide where to drill holes. Align Back channel under corner of pocket so that the side of the back channel is flush with the end plate and perpendicular to the pocket.

4b. Mark mounting screw hole locations with a center punch

4c. Pre-drill holes in the back of the side channel using 1/16" metal drill bit

4d. Re-align the back channel and mount with the correct mounting screws


4a.



4b.



4c.

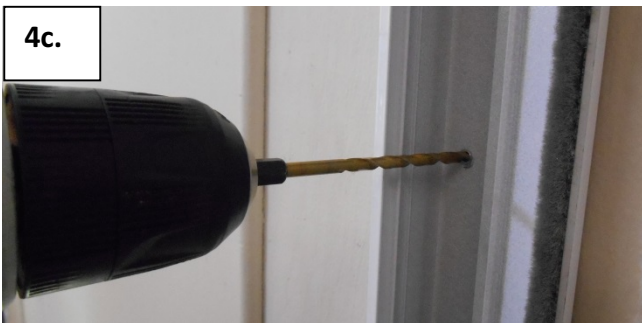





4d.



Step 5: Install Shade

5a. Insert Clutch side first by placing the hole in the clutch onto the tab on the bracket.

5b. Insert Idler by pulling shade up and around the flag on the middle of the idler end bracket (keeping the flag open), then insert the tab on the idler in the bracket (be sure to close flag using lever)

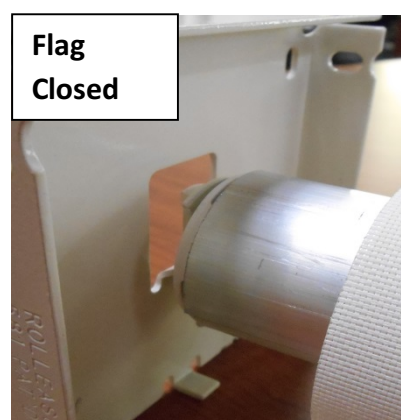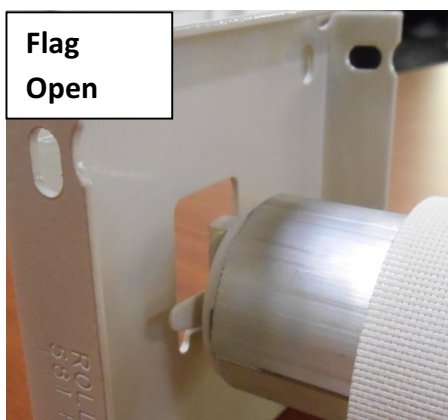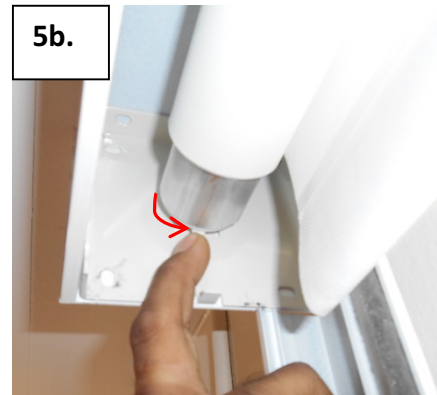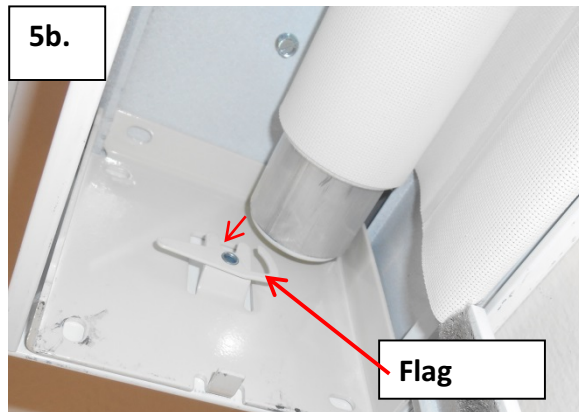


Step 6: Install Front Side Channel


6a. Snap front side channel by engaging lip of front side channel into the groove on the back side channel the snapping closed into place



Engage lip into groove



Snap into place

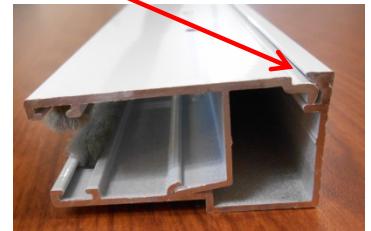


Step 7: Install Bottom Channel

7a. Place left side of bottom channel between the front and back side channels


7b. Slide the right side down in between the front and back side channels until the bottom closure is at the bottom of the side channels

7c. While holding the bottom closure in place, drill a a screw hole using a 1/16" metal drill bit 3/8" from the bottom left hand corner of the side and bottom channel and install mounting screw through both channels.through all channels and into the wall.


7a.

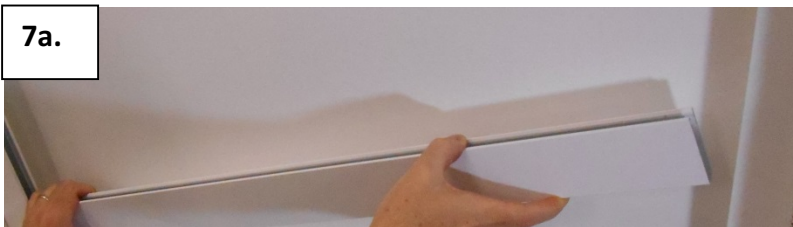

7b.

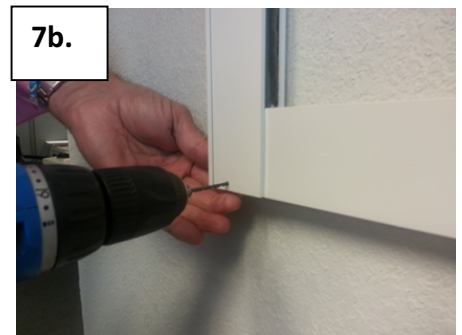

7c.

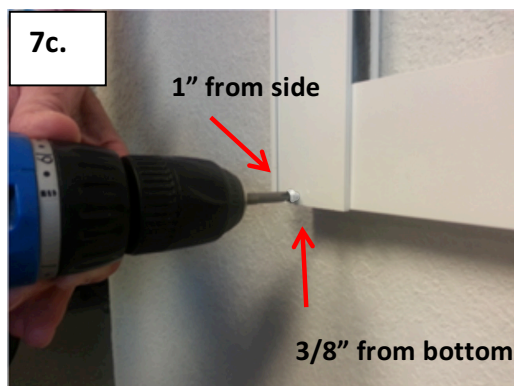


Step 8: Install Bottom Closure

8a. Insert bottom closure into pocket on an angle (as shown).

8b. Once it is aligned in shade, allow front of bottom closure to drop in place

8a.

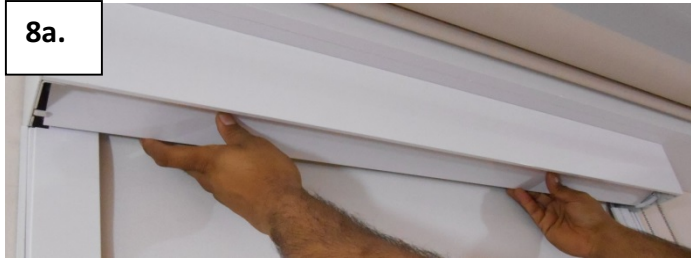

Idler Side




Clutch Side

8b.



Idler Side

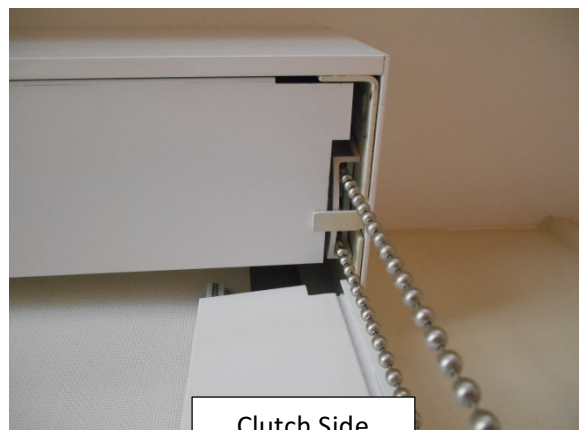

Clutch Side

Step 9: Install Tension Device



Installed Shade

SAFETY INFORMATION



! WARNING

For more safety information call 1-888-501-8364
in the U.S. or 1-866-662-0666 in Canada.

Young children can STRANGLE in cord loops and in the loop above the cord stop. They can also wrap cords around their necks and STRANGLE.

- Always keep cords out of children's reach.
- Move cribs, playpens and other furniture away from cords. Children can climb furniture to get to cords.



FOR RESIDENTS IN CANADA:



To get more information, call 1-866-662-0666 or visit
www.canada.ca/en/health-canada/services/home-safety/blind-cord-safety.html.





WARRANTY INFORMATION

Lifetime Limited Warranty covering our Custom Made Blinds

We extend this lifetime limited warranty to the original purchaser. This warranty applies only to manually operated Custom Products properly installed in the window, door or interior area for which they were intended. Installation of the product must be in accordance with accompanying instructions. The product cannot be modified. It is the purchaser's responsibility to maintain and clean the product in compliance with the instruction provided. The product must be used only in the window for which it was purchased. Damage to the product resulting from misuse, abuse, direct exposure to salty air or discoloration due to sunlight or the passage of time is not covered by this warranty.

This warranty does not apply to conditions caused by normal wear and tear upon the product. This warranty is exclusive and in lieu of all other obligations, liabilities or warranties. In no event shall the Manufacturer be liable for incidental or consequential damages or for any other direct or indirect damage, loss, cost, expense or fee. Some states do not allow the exclusion or limitation of incidental or consequential damages, so this exclusion or limitation may not apply to you.

In the event of a defect under this warranty, we will repair or replace the product, at our option, provided it is returned to our store. Our warranty obligation excludes shipping charges and labor costs for measuring and installation. Repairs will be made with like or similar parts. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

Notes: Motorization Systems are warranted for five years from the date of purchase. Specialty Blinds and Shades are warranted for one year from the date of purchase.

This warranty does not apply to Commercial Orders.