

DISCUS AQUARIUM | General arrangement

OPTION B | mm | Front / right 1:9.524

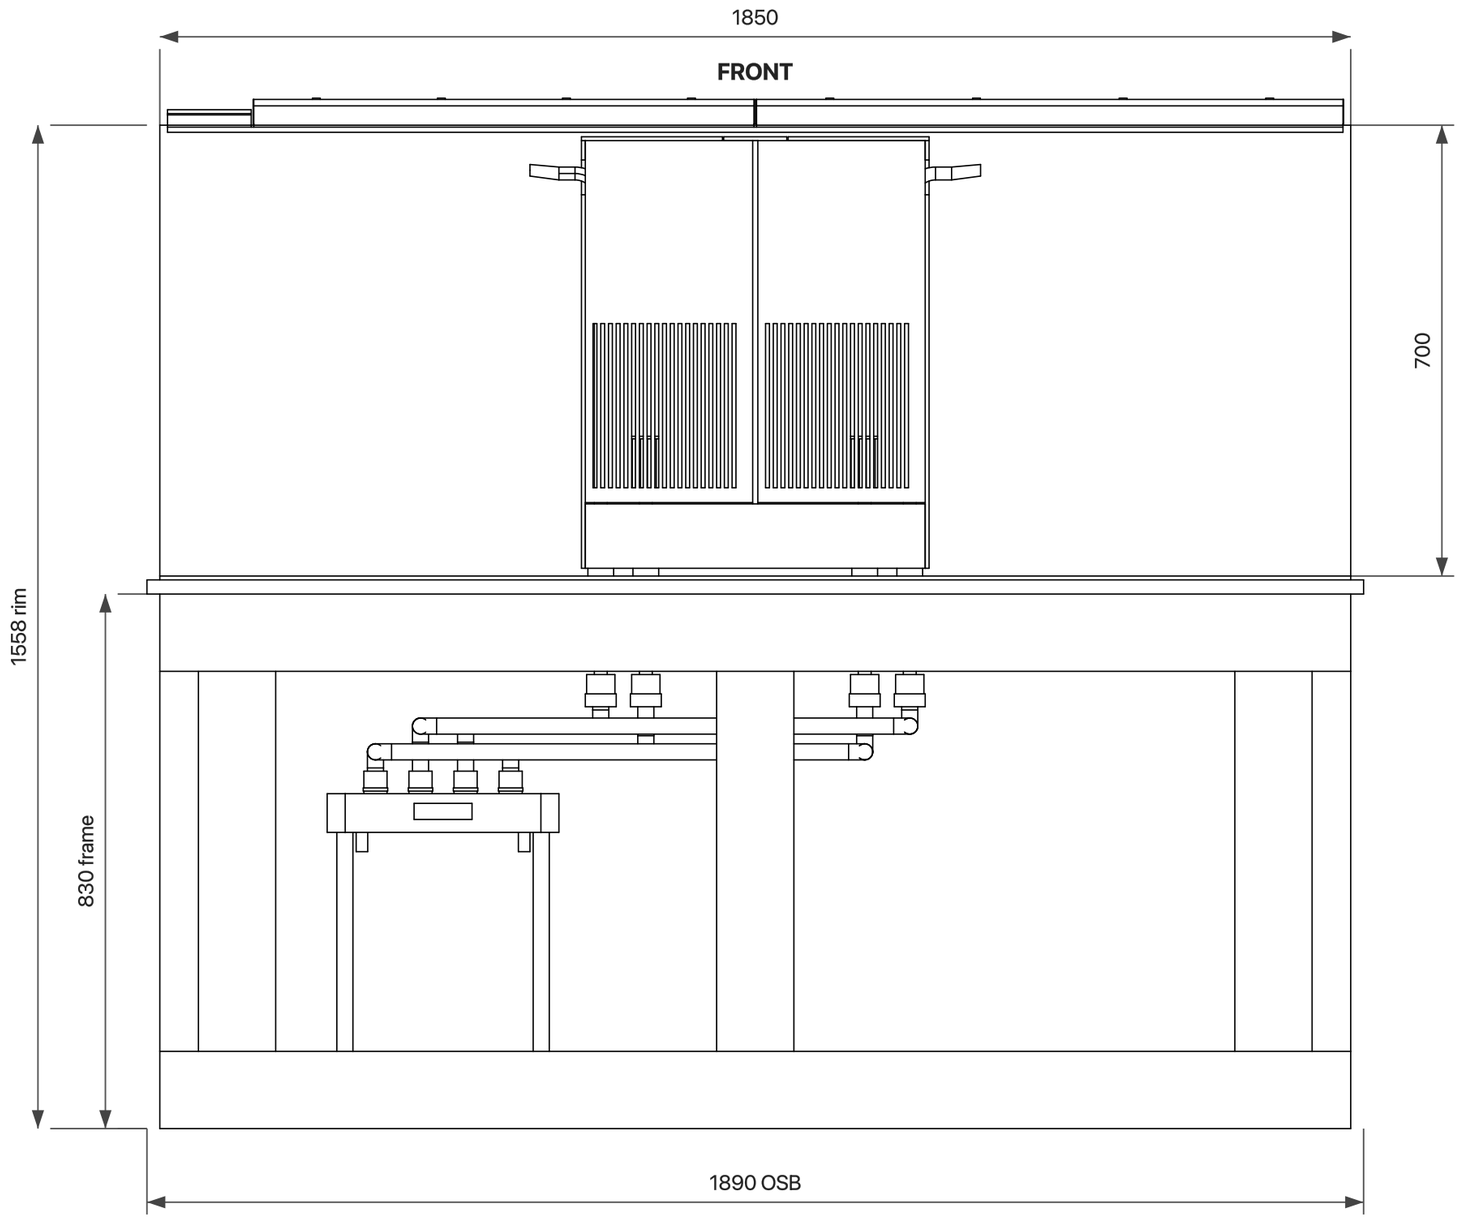

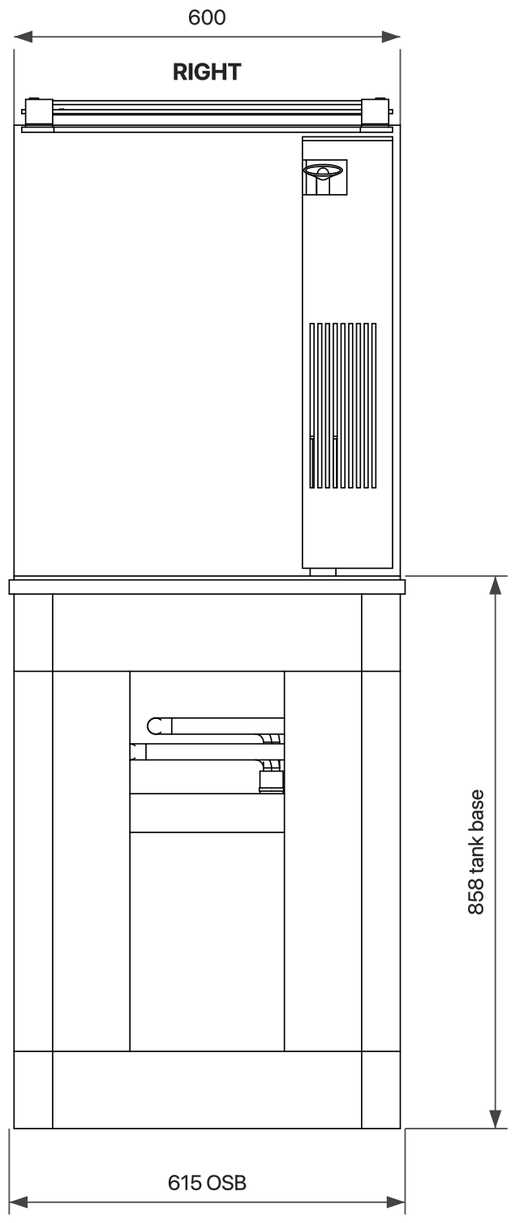

Tank 1850 x 600 x 700 | Front and sides: Optiwhite 12 mm

Stand 830 | OSB 22 | XPE mat 6 | Tank base 858


Rear-centre filter housing 540 x 140 x 670 | Lid top 1600

Acrylic cover with guide rails. Mat thickness before compression.

DISCUS AQUARIUM | Central plumbing

OPTION B | mm | Top 1:9.091 | housing 1:6.25


TOP / SUPPORT AND PIPE POSITIONS

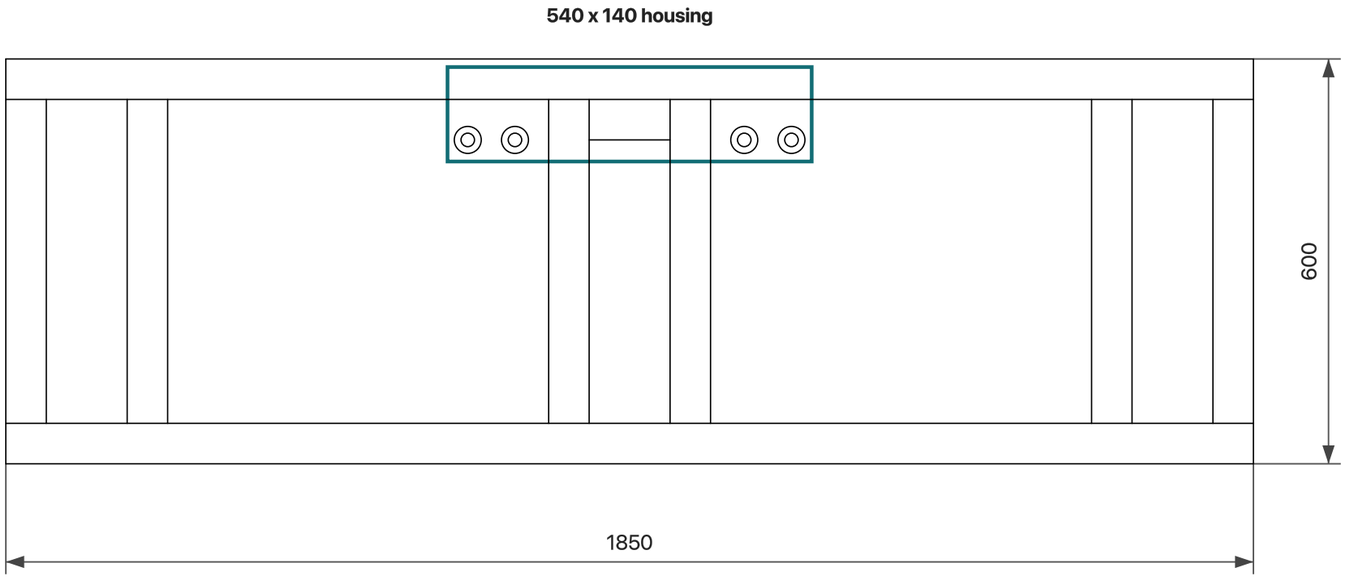

Housing 540 x 140 x 670; single-row connections beside the centre timber.

Pipe positions shown for layout; no drilling dimensions are given.

HOUSING / FRONT REMOVED

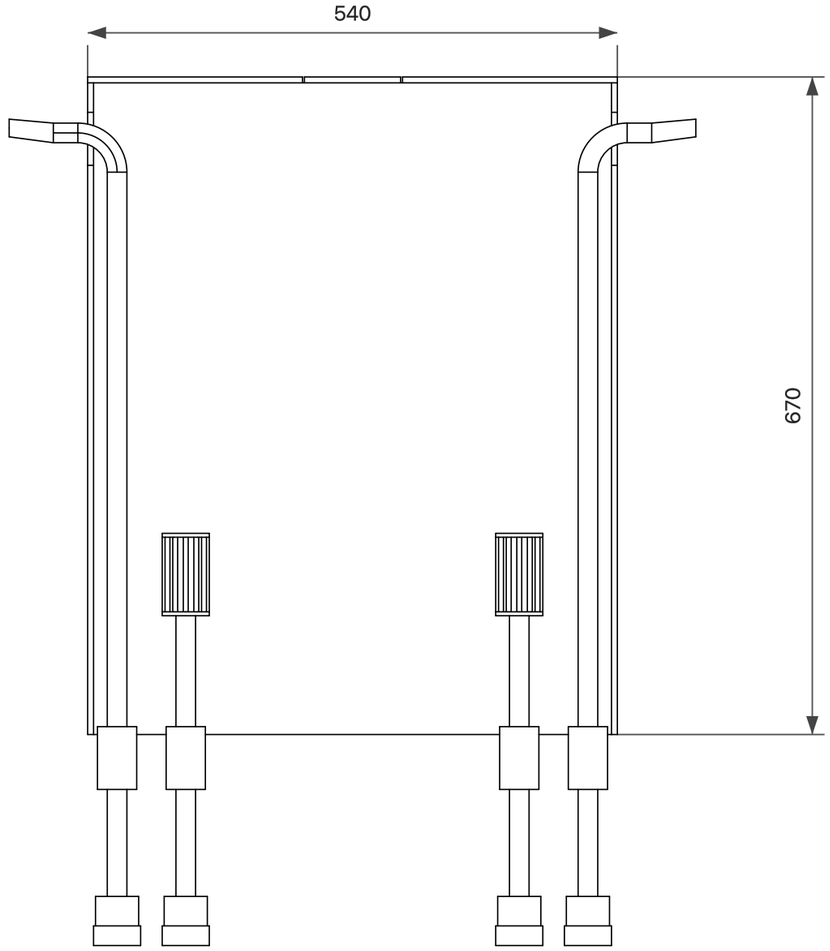

FLOW / CONNECTIONS

Two low intakes; two near-surface returns pointing left and right.

Intake slots 95 above substrate | Returns 30 below water

Levels above floor: bottom 870 | substrate 900 | water 1518

Aquael HYPERMAX LINK | 2 IN (blue) + 2 OUT (red) | Hose 19/25 mm

Use Aquael's supplied angled hose connectors. Tank-side PVC adapters: 20 mm; hose fit unresolved.

Fitting shapes and hose bends are schematic; selected products are not modelled.

Keep valves and unions accessible below the frame. The screened cover is not leak containment.

OPTION B | mm | Support views 1:28.571

PLUMBING MATERIALS

Item	Size	Qty
Glass bulkhead with nut	20 mm x 3/4"	4
Hose connector	20 mm	4
PVC elbow, 90 deg	20 mm	2
PVC elbow, 45 deg	20 mm	2
PVC pipe	20 mm	4

16 pieces.


Filter kit: hoses, intake baskets and return accessories.

Tank-side isolation valves, unions and supports are additional parts.

Glass: front and sides Optiwhite; rear and base clear float. Black film on rear.

SUPPORT LAYERS

OSB 1890 x 615 x 22 | XPE 1850 x 600 x 6

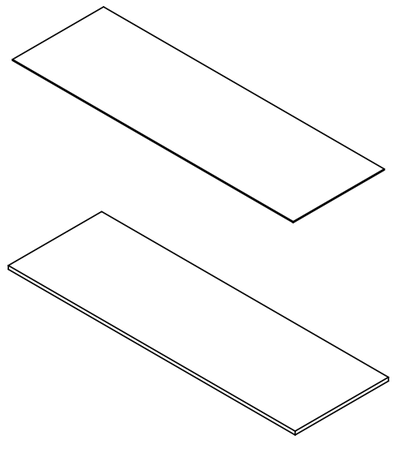

TIMBER STAND

KVH 60 x 120 | Frame 1850 x 600 x 830

