Senador Cassiano Projetos e Cortes.skp

Summary

Settings

Optimization Level : AdvancedPreferred Direction : No preference

Blade Thickness : 3mmTrimming : 5mm

• Shape of Parts: Hidden

Statistics

Number of Cuts: 94
Length of Cuts: 115,84 m
Overall Efficiency: 79,42%


• **Leftovers to keep**: 7 (L x W > 100mm x 100mm)

Panel	Qty.	Length	Width	Σ Area	# Parts
Standard Panel	5	2750mm	1850mm	25,44 m²	55


В


550mm

1850mm

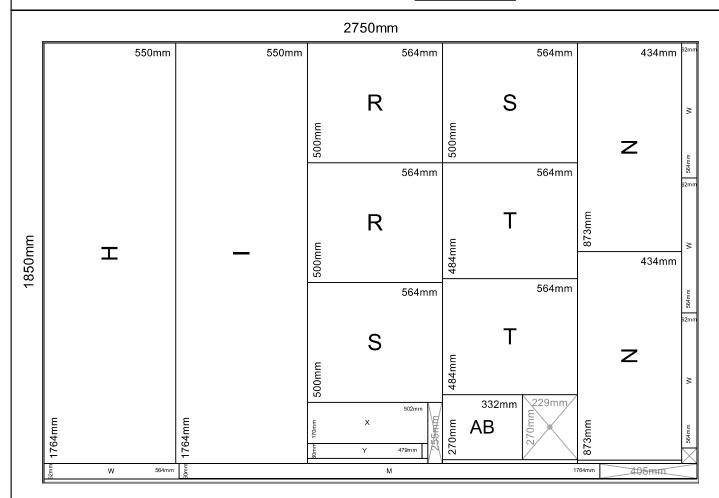


No.	Decignation	Qty.	Finished	
INO.	Designation		L	W
Н	Тор	1	1764mm	550mm
I	Top ▶ 4	1	1764mm	550mm
М	Soleira quarto	1	1764mm	60mm
N	Prat#1	2	873mm	434mm
R	Piso	2	564mm	500mm
S	Piso Piso	2	564mm	500mm
Т	Piso#1	2	564mm	484mm
W	Soleira	4	564mm	62mm
Х	Tecl	1	502mm	170mm
Υ	Meio quarto	1	479mm	60mm
AB	Div nicho	1	332mm	270mm
les Ni	- main Trimmin or Front 40 mate	00.04	I = cc ·	05.040/

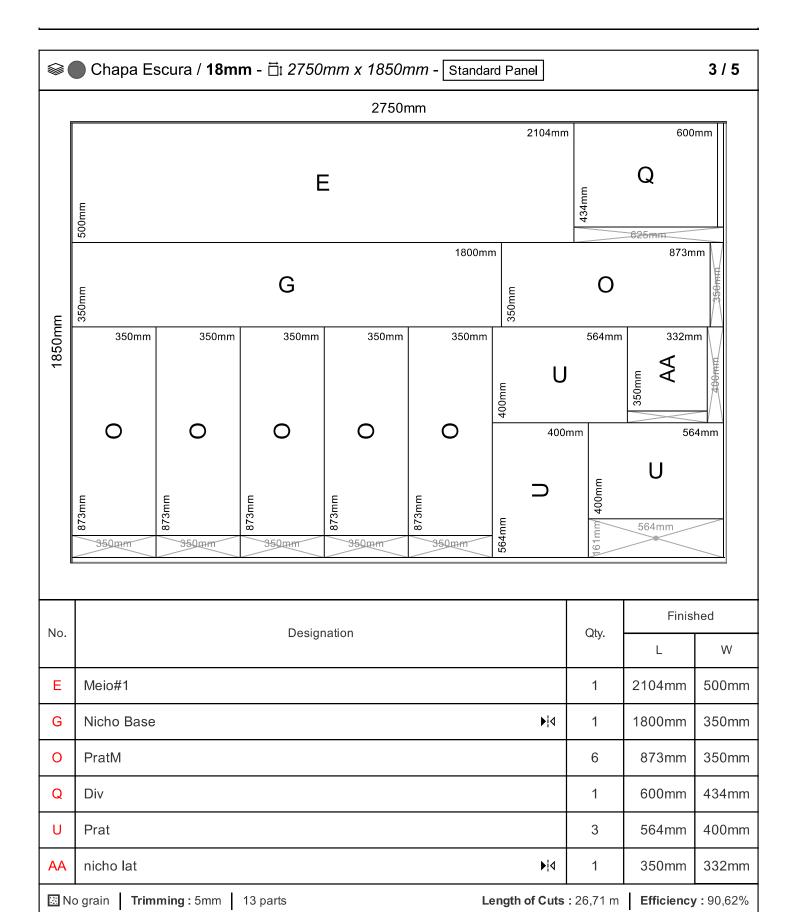

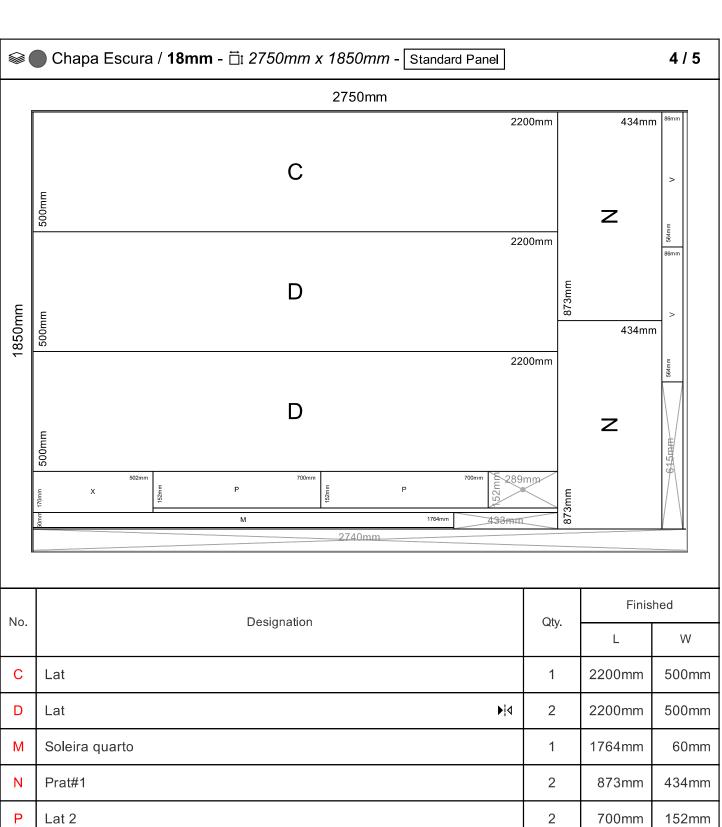

No.	Designation	Qty.	i illielled	
	Designation		L	W
С	Lat	1	2200mm	500mm
D	Lat ▶i4	2	2200mm	500mm
М	Soleira quarto	1	1764mm	60mm
N	Prat#1	2	873mm	434mm
Р	Lat 2	2	700mm	152mm
V	Sep	2	564mm	~ 86mm
Х	Tecl	1	502mm	170mm
☑ No grain Trimming : 5mm 11 parts Length of Cuts : 25,99 m Efficiency : 90,42%				

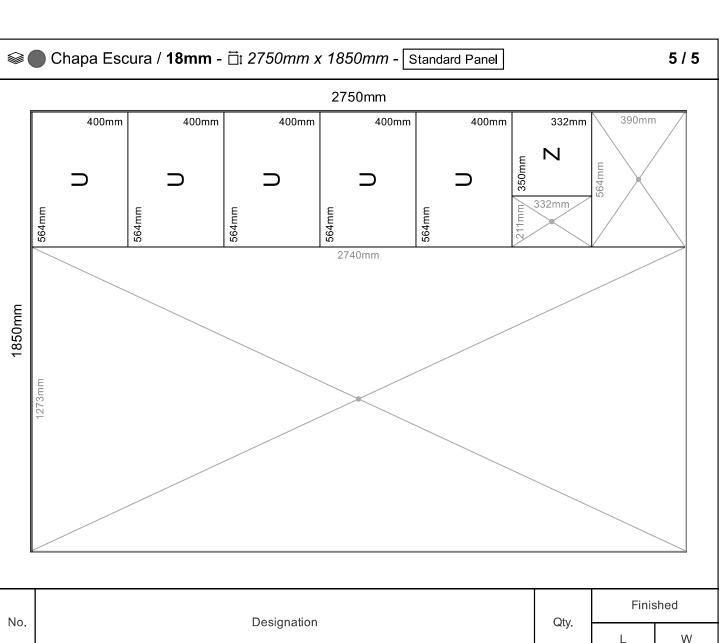

El No grain Trimming : Force 6 ports					
	Z	nicho lat	1	350mm	332mm
	C	Prat	5	564mm	400mm
INO	INO.	Designation	Qty.	L	W
No	No.	Designation	Otv	Finished	

■ No grain | Trimming: 5mm | 6 parts | Length of Cuts: 11,05 m | Efficiency: 24,68%