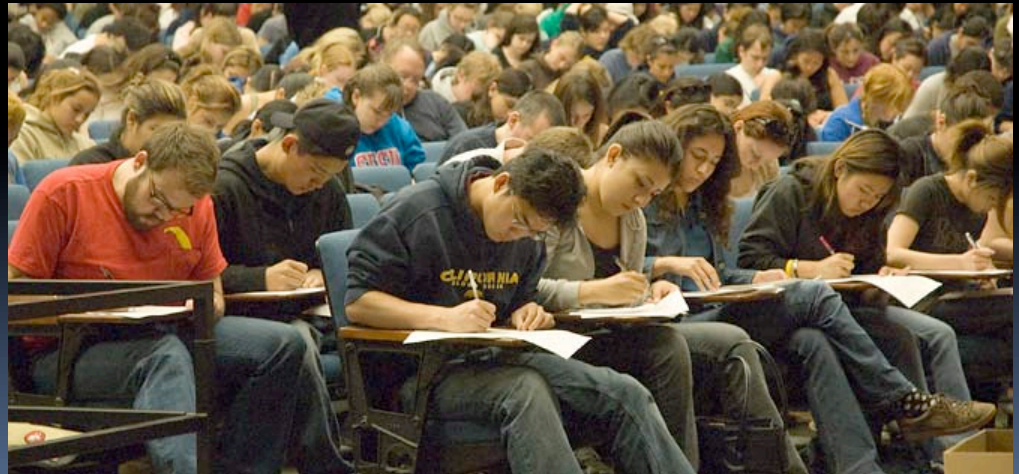inst.eecs.berkeley.edu/~cs61c

UCB CS61C : Machine Structures

Lecture 16 – Running a Program
(Compiling, Assembling, Linking, Loading)

Sr Lecturer SOE
Dan Garcia

SOME EECS FACULTY CONSIDERING LAPTOP BAN

Research shows laptops and tablets in class lower performance of people around them. Ban? Make 'em sit in the back? EECS faculty mulling over!

wapo.st/1rd6LOR

Administrivia…

- Midterm Exam - You get to bring
    - Your study sheet
    - Your green sheet
    - Pens & Pencils
- What you don't need to bring
    - Calculator, cell phone, pagers
- Conflicts? DSP accomodations? Email Head TA
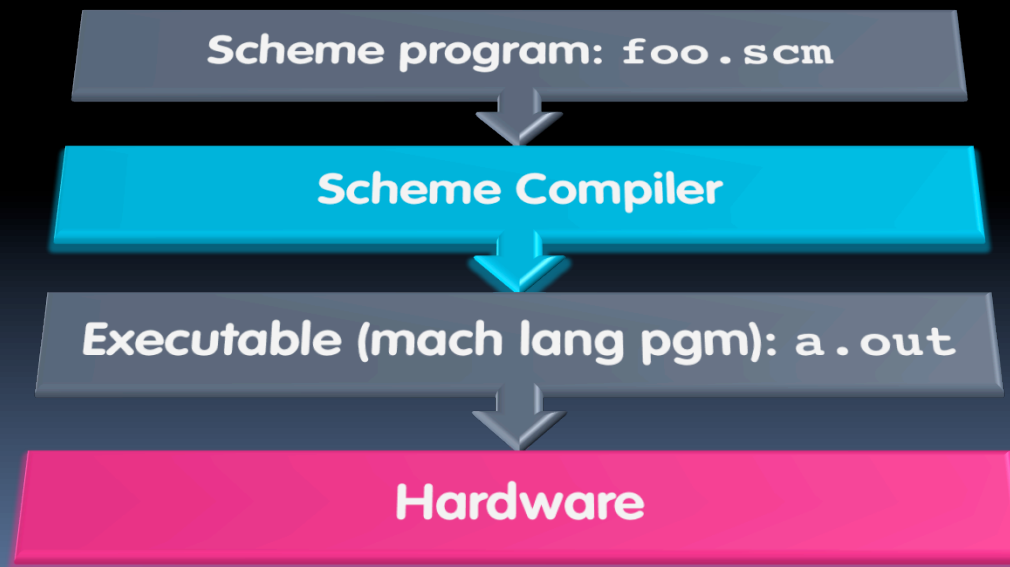
Interpretation

Scheme program: `foo.scm`

Scheme interpreter

- Scheme Interpreter is just a program that reads a scheme program and performs the functions of that scheme program.

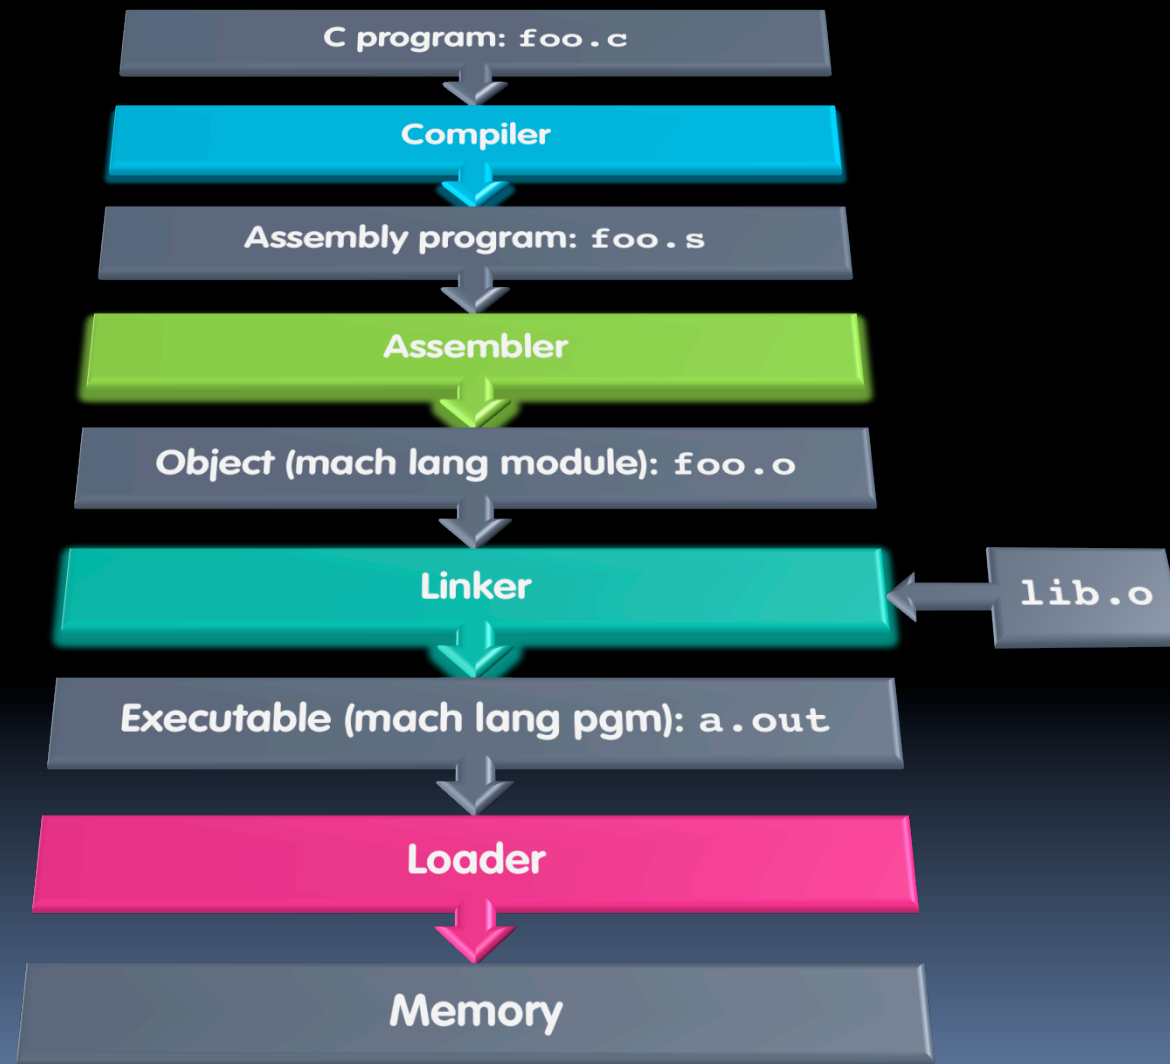# Translation

- Scheme Compiler is a translator from Scheme to machine language.

- The processor is a hardware interpeter of machine language.

Scheme program: `foo.scm`

↓

Scheme Compiler

↓

Executable (mach lang pgm): `a.out`

↓

Hardware

Steps to Starting a Program (translation)

C program: `foo.c`

Compiler

Assembly program: `foo.s`

Assembler

Object (mach lang module): `foo.o`

Linker ← `lib.o`

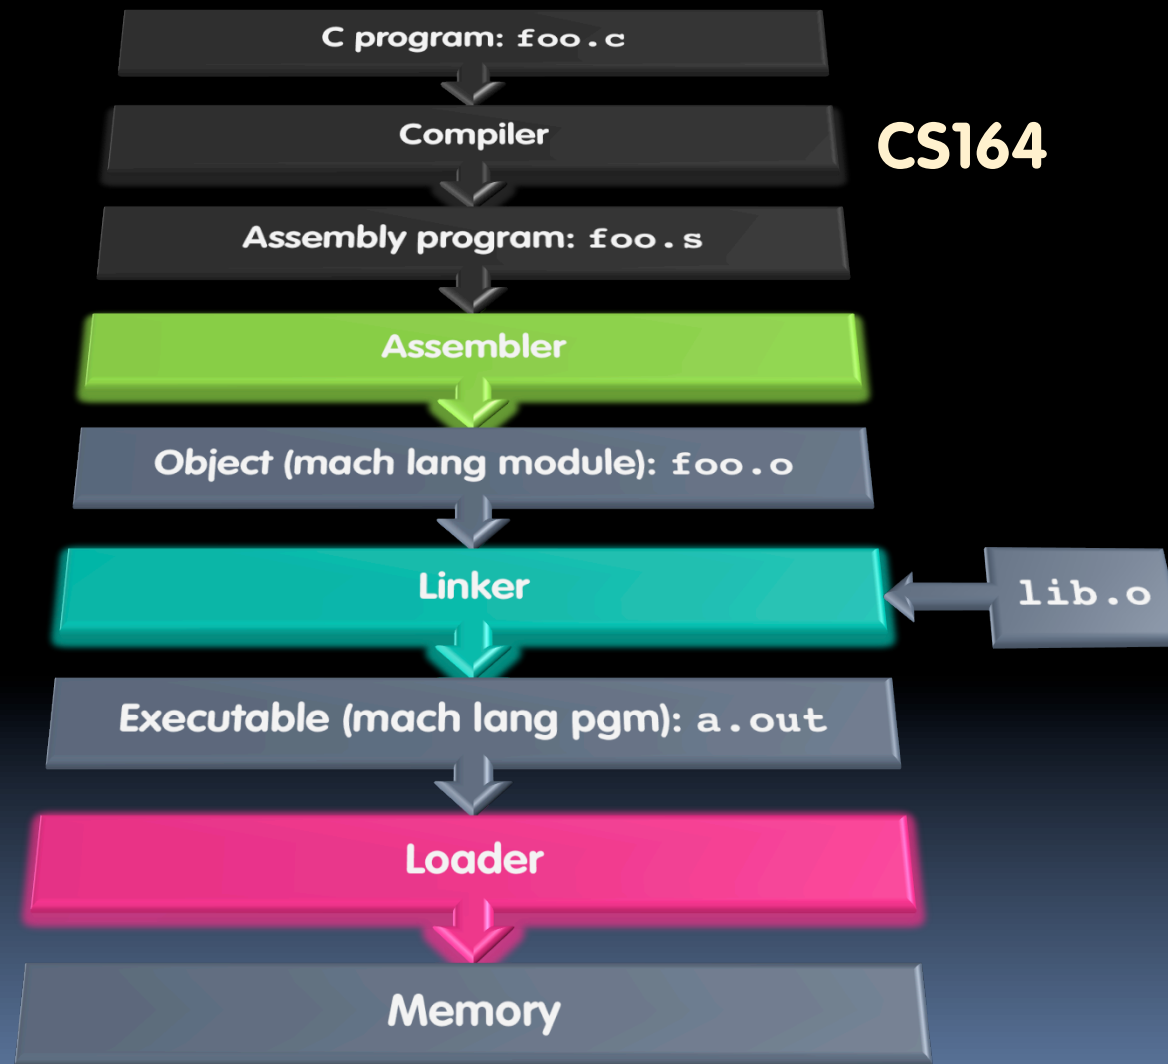Executable (mach lang pgm): `a.out`

Loader

Memory

Compiler

- Input: High-Level Language Code
  (e.g., C, Java such as `foo.c`)

- Output: Assembly Language Code
  (e.g., `foo.s` for MIPS)

- Note: Output *may* contain pseudoinstructions

- Pseudoinstructions: instructions that assembler understands but not in machine
  For example:
  - `move $s1,$s2` ⇒ `or $s1,$s2,$zero`

Where Are We Now?

C program: `foo.c`

↓

Compiler   CS164

↓

Assembly program: `foo.s`

↓

Assembler

↓

Object (mach lang module): `foo.o`

↓

Linker ← `lib.o`

↓

Executable (mach lang pgm): `a.out`

↓

Loader

↓

Memory

Assembler

- Input: Assembly Language Code (MAL)
  (e.g., `foo.s` for MIPS)

- Output: Object Code, information tables (TAL)
  (e.g., `foo.o` for MIPS)

- Reads and Uses Directives

- Replace Pseudoinstructions

- Produce Machine Language

- Creates Object File

Assembler Directives (p. A-51 to A-53)

- Give directions to assembler, but do not produce machine instructions

  - **.text:** Subsequent items put in user text segment (machine code)

  - **.data:** Subsequent items put in user data segment (binary rep of data in source file)

  - **.globl sym:** declares `sym` global and can be referenced from other files

  - **.asciiz str:** Store the string **str** in memory and null-terminate it

  - **.word w1...wn:** Store the *n* 32-bit quantities in successive memory words

Pseudoinstruction Replacement

- Asm. treats convenient variations of machine language instructions as if real instructions

Pseudo:	Real:
`subu $sp,$sp,32`	`addiu $sp,$sp,-32`
`sd $a0, 32($sp)`	`sw $a0, 32($sp)`
	`sw $a1, 36($sp)`
`mul $t7,$t6,$t5`	`mul $t6,$t5`
	`mflo $t7`
`addu $t0,$t6,1`	`addiu $t0,$t6,1`
`ble $t0,100,loop`	`slti $at,$t0,101`
	`bne $at,$0,loop`
`la $a0, str`	`lui $at,left(str)`
	`ori $a0,$at,right(str)`

Producing Machine Language (1/3)

- Simple Case
  - Arithmetic, Logical, Shifts, and so on.
  - All necessary info is within the instruction already.
- What about Branches?
  - PC-Relative
  - So once pseudo-instructions are replaced by real ones, we know by how many instructions to branch.
- So these can be handled.

Producing Machine Language (2/3)

- "Forward Reference" problem
  - Branch instructions can refer to labels that are "forward" in the program:

    ```
            or    $v0, $0,  $0
    L1: slt   $t0, $0,  $a1
            beq   $t0, $0,  L2
            addi  $a1, $a1, -1
            j     L1
    L2: add   $t1, $a0, $a1
    ```

  - Solved by taking 2 passes over the program.
    - First pass remembers position of labels
    - Second pass uses label positions to generate code

Producing Machine Language (3/3)

- What about jumps (**j** and **jal**)?
  - Jumps require absolute address.
  - So, forward or not, still can't generate machine instruction without knowing the position of instructions in memory.
- What about references to data?
  - **la** gets broken up into **lui** and **ori**
  - These will require the full 32-bit address of the data.
- These can't be determined yet, so we create two tables…

Symbol Table

- List of "items" in this file that may be used by other files.

- What are they?
  - Labels: function calling
  - Data: anything in the `.data` section; variables which may be accessed across files

Relocation Table

- List of "items" this file needs the address later.
- What are they?
    - Any label jumped to: `j` or `jal`
        - internal
        - external (including lib files)
    - Any piece of data
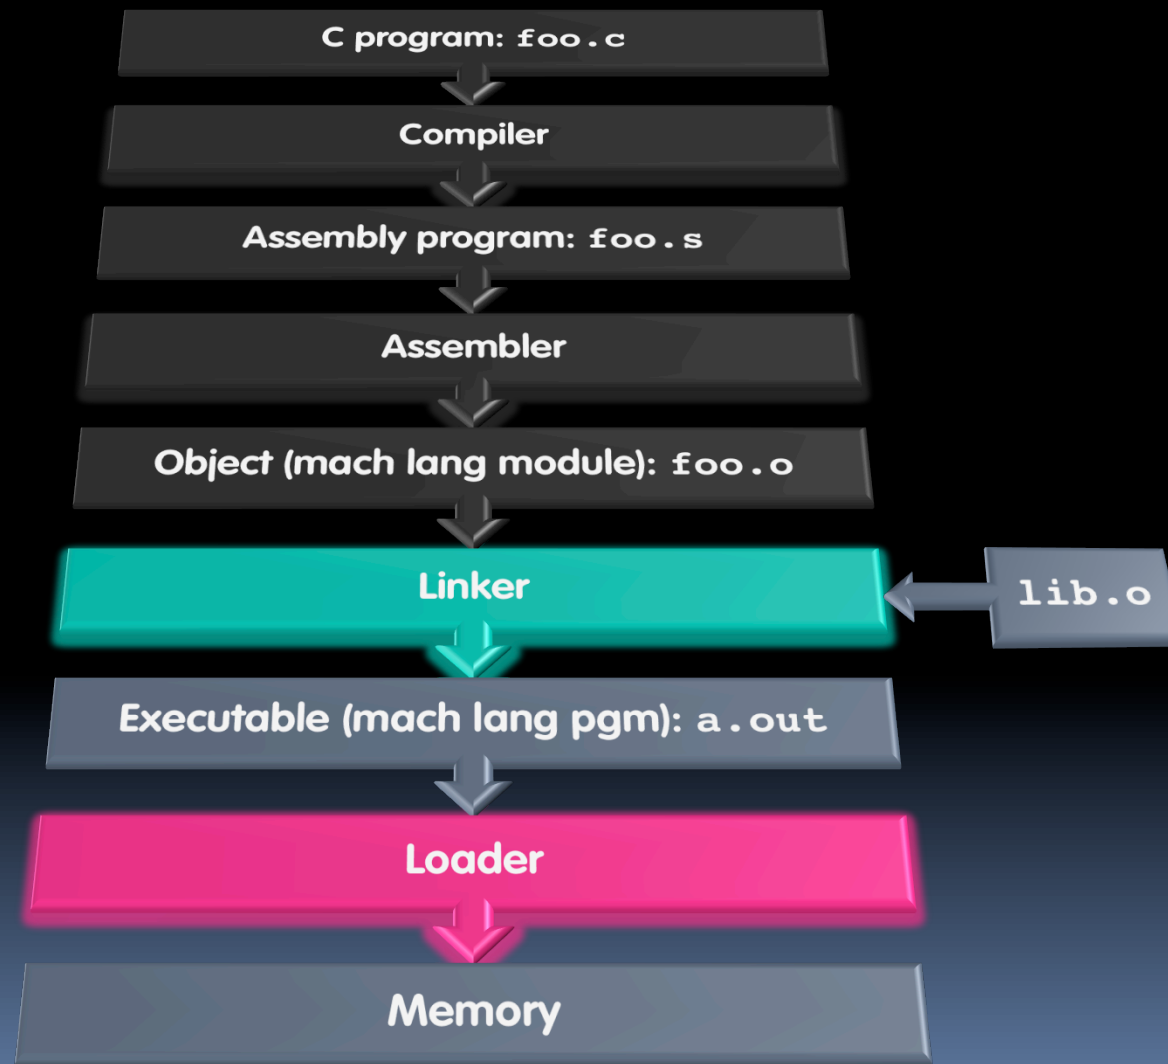   - such as the `la` instruction

Object File Format

- <u>object file header</u>: size and position of the other pieces of the object file

- <u>text segment</u>: the machine code

- <u>data segment</u>: binary representation of the data in the source file

- <u>relocation information</u>: identifies lines of code that need to be "handled"

- <u>symbol table</u>: list of this file's labels and data that can be referenced

- <u>debugging information</u>

- A standard format is ELF (except MS)

`http://www.skyfree.org/linux/references/ELF_Format.pdf`

Where Are We Now?

C program: `foo.c`

↓

Compiler

↓

Assembly program: `foo.s`

↓

Assembler

↓

Object (mach lang module): `foo.o`

↓

Linker ← `lib.o`

↓

Executable (mach lang pgm): `a.out`

↓

Loader

↓

Memory

Linker (1/3)

- Input: Object Code files, information tables (e.g., `foo.o,libc.o` for MIPS)

- Output: Executable Code
  (e.g., `a.out` for MIPS)

- Combines several object (`.o`) files into a single executable ("<u>linking</u>")

- Enable Separate Compilation of files

  - Changes to one file do not require recompilation of whole program

    - Windows NT source was > 40 M lines of code!

  - Old name "Link Editor" from editing the "links" in jump and link instructions

Linker (2/3)

.o file 1

text 1
data 1
info 1

.o file 2

text 2
data 2
info 2

Linker

a.out

Relocated text 1
Relocated text 2
Relocated data 1
Relocated data 2

Linker (3/3)

- Step 1: Take text segment from each `.o` file and put them together.

- Step 2: Take data segment from each `.o` file, put them together, and concatenate this onto end of text segments.

- Step 3: Resolve References
  - Go through Relocation Table; handle each entry
  - That is, fill in all absolute addresses

Four Types of Addresses we'll discuss

- PC-Relative Addressing (`beq`, `bne`)
    - never relocate
- Absolute Address (`j`, `jal`)
    - always relocate
- External Reference (usually `jal`)
    - always relocate
- Data Reference (often `lui` and `ori`)
    - always relocate

Absolute Addresses in MIPS

- Which instructions need relocation editing?

  - J-format: jump, jump and link

j/jal	xxxxx

  - Loads and stores to variables in static area, relative to global pointer

lw/sw	$gp	$x	address

  - What about conditional branches?

beq/bne	$rs	$rt	address

  - PC-relative addressing preserved even if code moves

Resolving References (1/2)

- Linker assumes first word of first text segment is at address **0x00000000**.
  - (More later when we study "virtual memory")
- Linker knows:
  - length of each text and data segment
  - ordering of text and data segments
- Linker calculates:
  - absolute address of each label to be jumped to (internal or external) and each piece of data being referenced
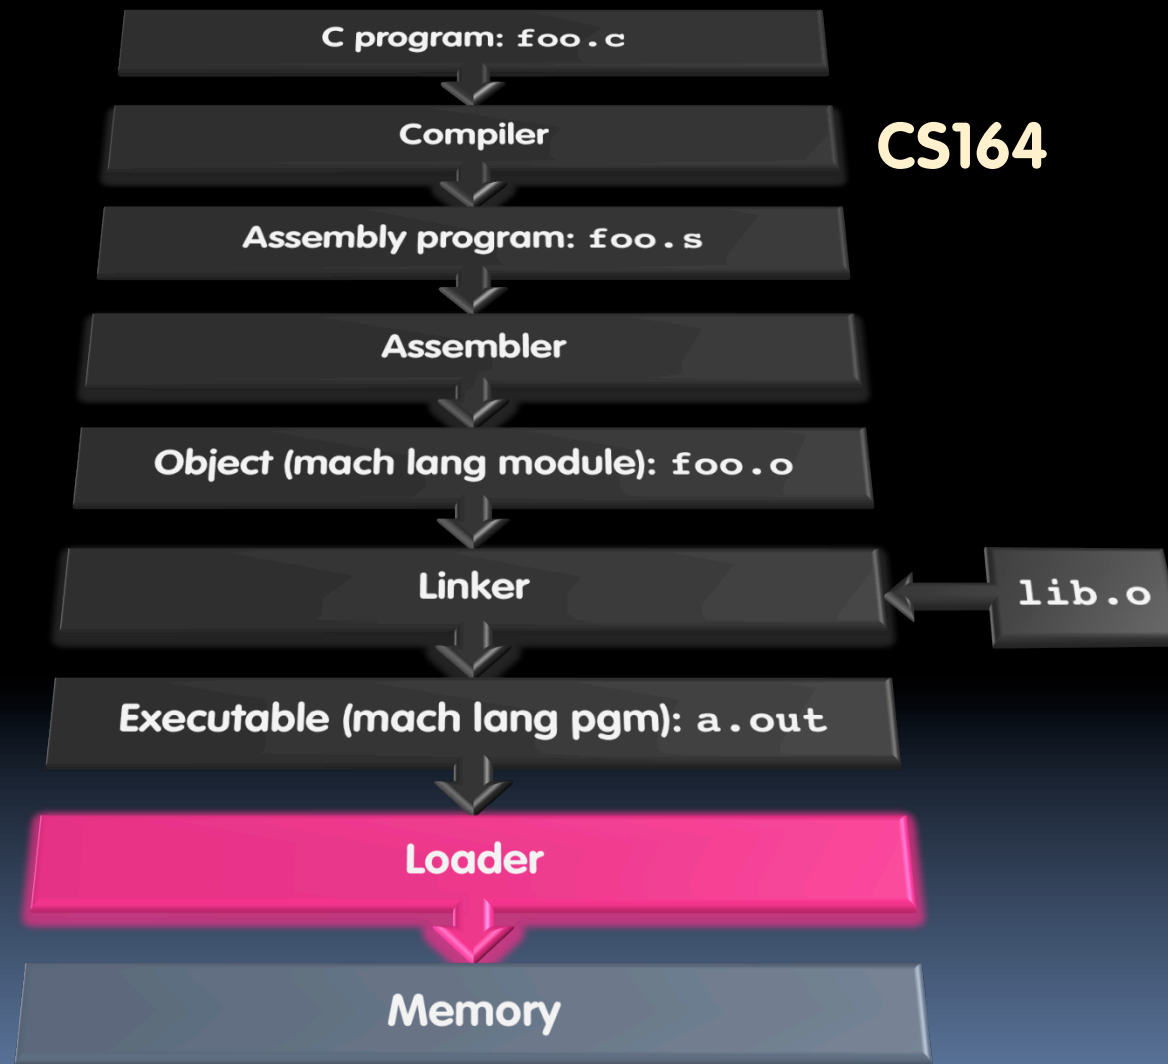
Resolving References (2/2)

- To resolve references:
  - search for reference (data or label) in all "user" symbol tables
  - if not found, search library files
    (for example, for `printf`)
  - once absolute address is determined, fill in the machine code appropriately

- Output of linker: executable file containing text and data (plus header)

Where Are We Now?

C program: `foo.c`

↓

Compiler   CS164

↓

Assembly program: `foo.s`

↓

Assembler

↓

Object (mach lang module): `foo.o`

↓

Linker ← `lib.o`

↓

Executable (mach lang pgm): `a.out`

↓

Loader

↓

Memory

Loader Basics

- Input: Executable Code
  (e.g., `a.out` for MIPS)

- Output: (program is run)

- Executable files are stored on disk.

- When one is run, loader's job is to load it into memory and start it running.

- In reality, loader is the operating system (OS)
  - loading is one of the OS tasks
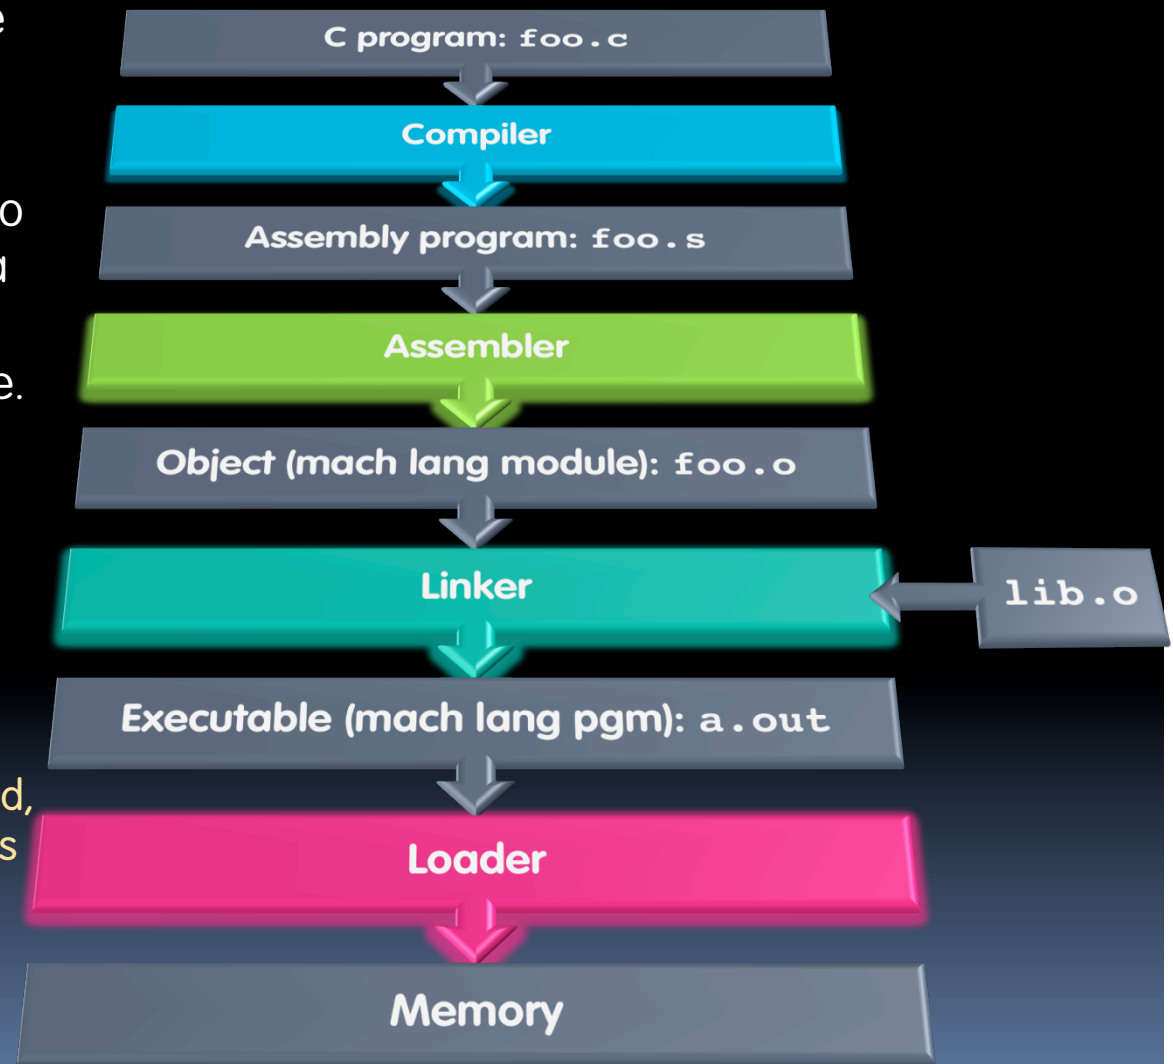
Loader … what does it do?

- Reads executable file's header to determine size of text and data segments

- Creates new address space for program large enough to hold text and data segments, along with a stack segment

- Copies instructions and data from executable file into the new address space

- Copies arguments passed to the program onto the stack

- Initializes machine registers
  - Most registers cleared, but stack pointer assigned address of 1st free stack location

- Jumps to start-up routine that copies program's arguments from stack to registers & sets the PC
  - If main routine returns, start-up routine terminates program with the exit system call

Conclusion

- Stored Program concept is very powerful. It means that instructions sometimes act just like data. Therefore we can use programs to manipulate other programs!
  - Compiler ⇒ Assembler ⇒ Linker (⇒ Loader)

- Compiler converts a single HLL file into a single assembly lang. file.

- Assembler removes pseudo instructions, converts what it can to machine language, and creates a checklist for the linker (relocation table). A `.s` file becomes a `.o` file.
  - Does 2 passes to resolve addresses, handling internal forward references

- Linker combines several `.o` files and resolves absolute addresses.
  - Enables separate compilation, libraries that need not be compiled, and resolves remaining addresses

- Loader loads executable into memory and begins execution.

C program: `foo.c`

Compiler

Assembly program: `foo.s`

Assembler

Object (mach lang module): `foo.o`

Linker ← `lib.o`

Executable (mach lang pgm): `a.out`

Loader

Memory

Which of the following instr. may need to be edited during link phase?

```
Loop: lui $at, 0xABCD  ⎫
      ori $a0,$at, 0xFEDC ⎬ # 1
      bne $a0,$v0, Loop    # 2
```

```
         12
a)  FF
b)  FT
c)  TF
d)  TT
```

Peer Instruction Answer

Which of the following instr. may need to be edited during link phase?

data reference; relocate

```
Loop: lui $at, 0xABCD
      ori $a0,$at, 0xFEDC } # 1
      bne $a0,$v0, Loop    # 2
```

PC-relative branch; OK

	12
a)	FF
b)	FT
c)	TF
d)	TT

Peer Instruction

1) Assembler will ignore the instruction **Loop:nop** because it does nothing.

2) Java designers used a translater AND interpreter (rather than just a translater) mainly because of (at least 1 of): ease of writing, better error msgs, smaller object code.

```
      12
a)   FF
b)   FT
c)   TF
d)   TT
```

Peer Instruction Answer

1) Assembler keeps track of all labels in symbol table…F!

Java Program
```
class HelloWorldApp {
    public static void main(String[] args) {
        System.out.println("Hello World!");
    }
}

HelloWorldApp.java
```

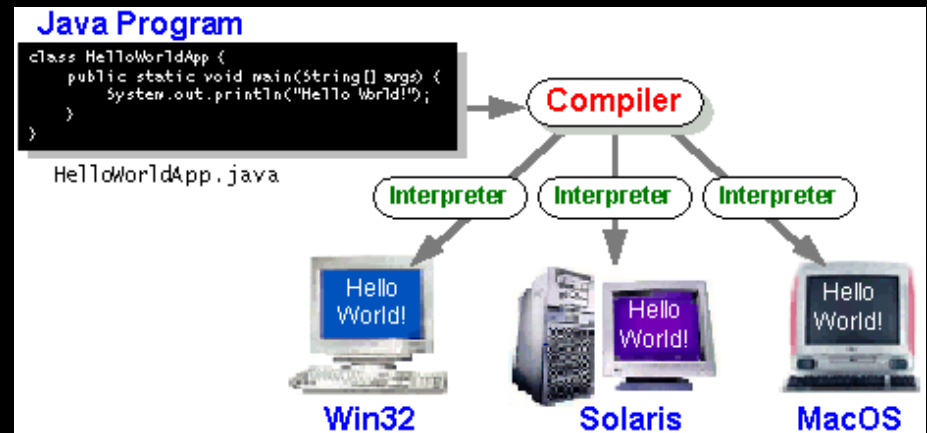2) Java designers used both mainly because of <u>code portability</u>…F!

1) Assembler will ignore the instruction **Loop:nop** because it does nothing.

2) Java designers used a translater AND interpreter (rather than just a translater) mainly because of (at least 1 of): ease of writing, better error msgs, smaller object code.

	12
a)	FF
b)	FT
c)	TF
d)	TT

Bonus slides

- These are extra slides that used to be included in lecture notes, but have been moved to this, the "bonus" area to serve as a supplement.

- The slides will appear in the order they would have in the normal presentation

Bonus

Language Execution Continuum

- An Interpreter is a program that executes other programs.

Java bytecode

Scheme Java C++ C Assembly machine language

Easy to program   Difficult to program
Inefficient to interpret   Efficient to interpret

- Language translation gives us another option.

- In general, we interpret a high level language when efficiency is not critical and translate to a lower level language to up performance

Interpretation vs Translation

- How do we run a program written in a source language?
  - Interpreter: Directly executes a program in the source language
  - Translator: Converts a program from the source language to an equivalent program in another language

- For example, consider a Scheme program `foo.scm`

Interpretation

- Any good reason to interpret machine language in software?

- SPIM – useful for learning / debugging

- Apple Macintosh conversion
    - Switched from Motorola 680x0 instruction architecture to PowerPC.
        - Similar issue with switch to x86.
    - Could require all programs to be re-translated from high level language
    - Instead, let executables contain old and/or new machine code, interpret old code in software if necessary (emulation)

Interpretation vs. Translation? (1/2)

- Generally easier to write interpreter

- Interpreter closer to high-level, so can give better error messages (e.g., MARS, stk)

  - Translator reaction: add extra information to help debugging (line numbers, names)

- Interpreter slower (10x?), code smaller (2x?)

- Interpreter provides instruction set independence: run on any machine

Interpretation vs. Translation? (2/2)

- Translated/compiled code almost always more efficient and therefore higher performance:
    - Important for many applications, particularly operating systems.
- Translation/compilation helps "hide" the program "source" from the users:
    - One model for creating value in the marketplace (eg. Microsoft keeps all their source code secret)
    - Alternative model, "open source", creates value by publishing the source code and fostering a community of developers.

Static vs Dynamically linked libraries

- What we've described is the traditional way: statically-linked approach
    - The library is now part of the executable, so if the library updates, we don't get the fix (have to recompile if we have source)
    - It includes the <u>entire</u> library even if not all of it will be used.
    - Executable is self-contained.
- An alternative is dynamically linked libraries (DLL), common on Windows & UNIX platforms

Dynamically linked libraries

- Space/time issues
  - □ + Storing a program requires less disk space
  - □ + Sending a program requires less time
  - □ + Executing two programs requires less memory (if they share a library)
  - □ – At runtime, there's time overhead to do link

- Upgrades
  - □ + Replacing one file (`libXYZ.so`) upgrades every program that uses library "XYZ"
  - □ – Having the executable isn't enough anymore

Overall, dynamic linking adds quite a bit of complexity to the compiler, linker, and operating system. However, it provides many benefits that often outweigh these.

Dynamically linked libraries

- The prevailing approach to dynamic linking uses machine code as the "lowest common denominator"

  - The linker does not use information about how the program or library was compiled (i.e., what compiler or language)

  - This can be described as "linking at the machine code level"

  - This isn't the only way to do it...

Example: <u>C</u> ⇒ Asm ⇒ Obj ⇒ Exe ⇒ Run

C Program Source Code: `prog.c`

```
#include <stdio.h>
int main (int argc, char *argv[]) {
  int i, sum = 0;
  for (i = 0; i <= 100; i++)
    sum = sum + i * i;
  printf ("The sum of sq from 0 .. 100 is
   %d\n",      sum);
}
```

"printf" lives in "libc"

Compilation: MAL

```
__.text
  .align  2
  .globl  main
main:
  subu $sp,$sp,32
  sw $ra, 20($sp)
  sd $a0, 32($sp)
  sw $0, 24($sp)
  sw $0, 28($sp)
loop:
  lw $t6, 28($sp)
  mul $t7, $t6,$t6
  lw $t8, 24($sp)
  addu $t9,$t8,$t7
  sw $t9, 24($sp)
```

```
  addu $t0, $t6, 1
  sw $t0, 28($sp)
  ble $t0,100, loop
  la $a0, str
  lw $a1, 24($sp)
  jal printf
  move $v0, $0
  lw $ra, 20($sp)
  addiu $sp,$sp,32
  jr $ra
  .data
  .align  0
str:
  .asciiz "The sum
  of sq from 0 ..
  100 is %d\n"
```

Where are 7 pseudo-instructions?

Compilation: MAL

```
    .text
    .align  2
    .globl  main
main:
    subu $sp,$sp,32
    sw $ra, 20($sp)
    sd $a0, 32($sp)
    sw $0, 24($sp)
    sw $0, 28($sp)
loop:
    lw $t6, 28($sp)
    mul $t7, $t6,$t6
    lw $t8, 24($sp)
    addu $t9,$t8,$t7
    sw $t9, 24($sp)
```

```
    addu $t0, $t6, 1
    sw $t0, 28($sp)
    ble $t0,100, loop
    la $a0, str
    lw $a1, 24($sp)
    jal printf
    move $v0, $0
    lw $ra, 20($sp)
    addiu $sp,$sp,32
    jr $ra
    .data
    .align  0
str:
    .asciiz "The sum
    of sq from 0 ..
    100 is %d\n"
```

7 pseudo-instructions underlined

Assembly step 1:

Remove pseudoinstructions, assign addresses

```
00 addiu $29,$29,-32        30 addiu $8,$14, 1
04 sw      $31,20($29)      34 sw      $8,28($29)
08 sw      $4, 32($29)      38 slti    $1,$8, 101
0c sw      $5, 36($29)      3c bne     $1,$0, loop
10 sw      $0, 24($29)      40 lui     $4, l.str
14 sw      $0, 28($29)      44 ori     $4,$4,r.str
18 lw    $14, 28($29)       48 lw      $5,24($29)
1c multu $14, $14           4c jal     printf
20 mflo    $15              50 add     $2, $0, $0
24 lw    $24, 24($29)       54 lw      $31,20($29)
28 addu $25,$24,$15         58 addiu $29,$29,32
2c sw    $25, 24($29)       5c jr       $31
```

Assembly step 2

Create relocation table and symbol table

- Symbol Table

Label	address (in module)	type
main:	0x00000000	global text
loop:	0x00000018	local text
str:	0x00000000	local data

- Relocation Information

Address	Instr. type	Dependency
0x00000040	lui	l.str
0x00000044	ori	r.str
0x0000004c	jal	printf

Assembly step 3

Resolve local PC-relative labels

```
00 addiu $29,$29,-32      30 addiu $8,$14, 1
04 sw    $31,20($29)      34 sw    $8,28($29)
08 sw    $4, 32($29)      38 slti  $1,$8, 101
0c sw    $5, 36($29)      3c bne   $1,$0, -10
10 sw    $0, 24($29)      40 lui   $4, l.str
14 sw    $0, 28($29)      44 ori   $4,$4,r.str
18 lw    $14, 28($29)     48 lw    $5,24($29)
1c multu $14, $14         4c jal   printf
20 mflo  $15              50 add   $2, $0, $0
24 lw    $24, 24($29)     54 lw    $31,20($29)
28 addu  $25,$24,$15      58 addiu $29,$29,32
2c sw    $25, 24($29)     5c jr    $31
```

Assembly step 4

- Generate object (`.o`) file:
  - Output binary representation for
    - ext segment (instructions),
    - data segment (data),
    - symbol and relocation tables.
  - Using dummy "placeholders" for unresolved absolute and external references.

Text segment in object file

```
0x000000    00100111101111011111111111100000
0x000004    10101111101111110000000000010100
0x000008    10101111101001000000000000100000
0x00000c    10101111101001010000000000100100
0x000010    10101111101000000000000000011000
0x000014    10101111101000000000000000011100
0x000018    10001111101011100000000000011100
0x00001c    10001111101110000000000000011000
0x000020    00000001110011100000000000011001
0x000024    00100101110010000000000000000001
0x000028    00101001000000100000000001100101
0x00002c    10101111101010000000000000011100
0x000030    00000000000000000111000000010010
0x000034    00000011000011111100100000100001
0x000038    00010100001000011111111111110111
0x00003c    10101111101110010000000000011000
0x000040    001110000000010000000000000000000
0x000044    100011111010010100000000000000000
0x000048    00001100000100000000000001101100
0x00004c    00100100000000000000000000000000
0x000050    10001111101111110000000000010100
0x000054    00100111101111010000000000100000
0x000058    00000011111000000000000000001000
0x00005c    00000000000000000001000000100001
```

Link step 1: combine `prog.o`, `libc.o`

- Merge text/data segments

- Create absolute memory addresses

- Modify & merge symbol and relocation tables

- Symbol Table
    - Label   Address
      `main:`   `0x00000000`
      `loop:`   `0x00000018`
      `str:`   `0x10000430`
      `printf:`   `0x000003b0`   …

- Relocation Information

    - Address   Instr. Type   Dependency
      `0x00000040`   `lui`   `l.str`
      `0x00000044`   `ori`   `r.str`
      `0x0000004c`   `jal`   `printf`   …

Link step 2:

- Edit Addresses in relocation table
  - (shown in TAL for clarity, but done in binary)

```
00 addiu $29,$29,-32        30 addiu $8,$14, 1
04 sw    $31,20($29)        34 sw    $8,28($29)
08 sw    $4, 32($29)        38 slti  $1,$8, 101
0c sw    $5, 36($29)        3c bne   $1,$0, -10
10 sw    $0, 24($29)        40 lui   $4, 4096
14 sw    $0, 28($29)        44 ori   $4,$4,1072
18 lw    $14, 28($29)       48 lw    $5,24($29)
1c multu $14, $14           4c jal   812
20 mflo $15                 50 add   $2, $0, $0
24 lw   $24, 24($29)        54 lw    $31,20($29)
28 addu $25,$24,$15         58 addiu $29,$29,32
2c sw   $25, 24($29)        5c jr    $31
```

Link step 3:

- Output executable of merged modules.
  - Single text (instruction) segment
  - Single data segment
  - Header detailing size of each segment

- NOTE:
  - The preceeding example was a much simplified version of how ELF and other standard formats work, meant only to demonstrate the basic principles.

Integer Multiplication (1/3)

- Paper and pencil example (unsigned):

```
Multiplicand   1000        8
 Multiplier    x1001       9
               1000
              0000
             0000
           +1000
           01001000
```

- m bits x n bits = m + n bit product

Integer Multiplication (2/3)

- In MIPS, we multiply registers, so:
  - 32-bit value x 32-bit value = 64-bit value
- Syntax of Multiplication (signed):
  - `mult` register1, register2
  - Multiplies 32-bit values in those registers & puts 64-bit product in special result regs:
    - puts product upper half in hi, lower half in lo
  - hi and lo are 2 registers separate from the 32 general purpose registers
  - Use `mfhi` register & `mflo` register to move from hi, lo to another register

Integer Multiplication (3/3)

- Example:
  - in C: `a = b * c;`
  - in MIPS:
    - let `b` be `$s2`; let `c` be `$s3`; and let `a` be `$s0` and `$s1` (since it may be up to 64 bits)

  ```
  mult $s2,$s3    # b*c
  mfhi $s0        # upper half of
                  # product into $s0
  mflo $s1        # lower half of
                  # product into $s1
  ```

- Note: Often, we only care about the lower half of the product.

Integer Division (1/2)

- Paper and pencil example (unsigned):

```
                     1001    Quotient
    Divisor 1000|1001010     Dividend
               -1000
                  10
                  101
                  1010
                 -1000
                   10 Remainder
                 (or Modulo result)
```

- Dividend = Quotient x Divisor + Remainder

Integer Division (2/2)

- Syntax of Division (signed):

  - `div` register1, register2

  - Divides 32-bit register 1 by 32-bit register 2:

  - puts remainder of division in `hi`, quotient in `lo`

- Implements C division (/) and modulo (%)

- Example in C: `a = c / d;    b = c % d;`

- in MIPS: a↔$s0;b↔$s1;c↔$s2;d↔$s3

```
div  $s2,$s3    # lo=c/d, hi=c%d
mflo $s0        # get quotient
mfhi $s1        # get remainder
```

Big Endian vs. Little Endian

Big-endian and little-endian derive from Jonathan Swift's *Gulliver's Travels* in which the Big Endians were a political faction that broke their eggs at the large end ("the primitive way") and rebelled against the Lilliputian King who required his subjects (the Little Endians) to break their eggs at the small end.

- **The order in which BYTES are stored in memory**
- **Bits always stored as usual. (E.g., 0xC2=0b 1100 0010)**

Consider the number 1025 as we normally write it:

BYTE3	BYTE2	BYTE1	BYTE0
00000000	00000000	00000100	00000001

Big Endian

	ADDR3	ADDR2	ADDR1	ADDR0
▪	BYTE0	BYTE1	BYTE2	BYTE3
	00000001	00000100	00000000	00000000

	ADDR0	ADDR1	ADDR2	ADDR3
▪	BYTE3	BYTE2	BYTE1	BYTE0
	00000000	00000000	00000100	00000001

Little Endian

	ADDR3	ADDR2	ADDR1	ADDR0
▪	BYTE3	BYTE2	BYTE1	BYTE0
	00000000	00000000	00000100	00000001

	ADDR0	ADDR1	ADDR2	ADDR3
▪	BYTE0	BYTE1	BYTE2	BYTE3
	00000001	00000100	00000000	00000000

www.webopedia.com/TERM/b/big_endian.html
searchnetworking.techtarget.com/sDefinition/0,,sid7_gci211659,00.html
www.noveltheory.com/TechPapers/endian.asp
en.wikipedia.org/wiki/Big_endian