

# 3GPP TS 38.415 V15.2.0 (2018-12)

---

*Technical Specification*

## **3rd Generation Partnership Project; Technical Specification Group Radio Access Network; NG-RAN; PDU Session User Plane Protocol (Release 15)**

---



**3GPP**

---

Postal address

---

3GPP support office address

---

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

---

Internet

---

<http://www.3gpp.org>

---

**Copyright Notification**

---

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© 2018, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).  
All rights reserved.

UMTS™ is a Trade Mark of ETSI registered for the benefit of its members  
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners  
LTE™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners  
GSM® and the GSM logo are registered and owned by the GSM Association

# Contents

Foreword .....	4
1 Scope .....	5
2 References .....	5
3 Definitions and abbreviations .....	5
3.1 Definitions .....	5
3.2 Abbreviations .....	5
4 General .....	6
4.1 General aspects .....	6
5 PDU Session user plane protocol .....	6
5.1 General .....	6
5.2 PDU Session user plane protocol layer services .....	6
5.3 Services expected from the Transport Network Layer .....	6
5.4 Elementary procedures .....	6
5.4.1 Transfer of DL PDU Session Information .....	6
5.4.1.1 Successful operation .....	6
5.4.1.2 Unsuccessful operation .....	7
5.4.2 Transfer of UL PDU Session Information .....	7
5.4.2.1 Successful operation .....	7
5.4.2.2 Unsuccessful operation .....	7
5.5 Elements for the PDU Session user plane protocol .....	7
5.5.1 General .....	7
5.5.2 Frame format for the PDU Session user plane protocol .....	8
5.5.2.1 DL PDU SESSION INFORMATION (PDU Type 0) .....	8
5.5.2.2 UL PDU SESSION INFORMATION (PDU Type 1) .....	9
5.5.3 Coding of information elements in frames .....	9
5.5.3.1 PDU Type .....	9
5.5.3.2 Spare .....	9
5.5.3.3 QoS Flow Identifier (QFI) .....	10
5.5.3.4 Reflective QoS Indicator (RQI) .....	10
5.5.3.5 Padding .....	10
5.5.3.6 Paging Policy Presence (PPP) .....	10
5.5.3.7 Paging Policy Indicator (PPI) .....	10
5.5.4 Timers .....	10
5.6 Handling of unknown, unforeseen and erroneous protocol data .....	10
<b>Annex A (informative): Example of using Future Extension Field .....</b>	<b>11</b>
A.1 Example of using Future Extension field .....	11
A.1.1 New IE Flags .....	11
<b>Annex B (informative): Change history .....</b>	<b>12</b>

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document specifies the PDU Session user plane protocol being used over the NG-U, Xn-U and N9 interfaces. Applicability to other interfaces is not precluded.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 38.300: "NextGen Radio Access Network (NG-RAN); Overall description; Stage 2".
- [3] 3GPP TS 29.281: "General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U)".
- [4] 3GPP TS 37.324: "E-UTRA and NR; Service Data Application Protocol (SDAP) specification".
- [5] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".

---

# 3 Definitions and abbreviations

## 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

**NG-U:** logical interface between NG-RAN node and UPF as described in TS 38.300 [2].

**Xn-U:** logical interface between NG-RAN nodes as defined in TS 38.300 [2].

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

PPI	Paging Policy Indicator
PPP	Paging Policy Presence
QFI	QoS Flow Identifier
RQA	Reflective QoS Attribute
RQI	Reflective QoS Indication
UP	User Plane
UPF	User Plane Function

---

## 4 General

### 4.1 General aspects

The PDU Session User Plane protocol is located in the User Plane of the Radio Network Layer above the Transport Network Layer of the interface.

Each PDU session User Plane protocol instance is associated to one PDU Session.

In this version of the present document, the PDU session user plane protocol data is conveyed by GTP-U protocol means, more specifically, by means of the "GTP-U Container" GTP-U Extension Header as defined in TS 29.281 [3].

---

## 5 PDU Session user plane protocol

### 5.1 General

The PDU session UP layer uses services of the Transport Network Layer in order to send its packets over the interface.

### 5.2 PDU Session user plane protocol layer services

The following functions are provided by the PDU Session User Plane protocol:

- Provision of control information elements (e.g. QFI, RQI) associated with a PDU session.

### 5.3 Services expected from the Transport Network Layer

The PDU session UP layer expects the following services from the Transport Network Layer:

- Transfer of PDU session User Plane PDUs.

### 5.4 Elementary procedures

#### 5.4.1 Transfer of DL PDU Session Information

##### 5.4.1.1 Successful operation

The purpose of the Transfer of DL PDU Session Information procedure is to send control information elements related to the PDU Session from UPF/NG-RAN to NG-RAN.


A PDU Session user plane instance making use of the Transfer of DL PDU Session Information procedure is associated to a single PDU Session. The Transfer of DL PDU Session Information procedure may be invoked whenever packets for that particular PDU Session need to be transferred across the related interface instance.

The DL PDU SESSION INFORMATION frame includes a QoS Flow Identifier (QFI) field associated with the transferred packet. The NG-RAN shall use the received QFI to determine the QoS flow and QoS profile which are associated with the received packet.

The DL PDU SESSION INFORMATION frame shall include the Reflective QoS Indicator (RQI) field to indicate that user plane Reflective QoS shall be activated or not. The NG-RAN shall, if RQA has been configured for the involved QoS flow, take the RQI into account as specified in TS 37.324 [4].

The DL PDU SESSION INFORMATION frame may also include a Paging Policy Indicator (PPI) field associated with the transferred packet. The NG-RAN shall use the received PPI to determine the paging policy differentiation which is associated with the received packet as described in [5].

When needed, the NG-RAN shall propagate the DL PDU Session Information to a peer NG-RAN.

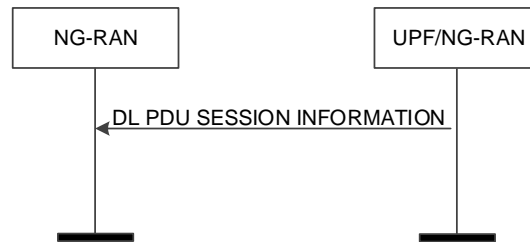

**Figure 5.4.1.1-1: Successful Transfer of DL PDU Session Information**

#### 5.4.1.2 Unsuccessful operation

Void.


### 5.4.2 Transfer of UL PDU Session Information

#### 5.4.2.1 Successful operation

The purpose of the Transfer of UL PDU Session Information procedure is to send control information elements related to the PDU Session from NG-RAN to UPF.

An UL PDU Session user plane instance making use of the Transfer of UL PDU Session Information procedure is associated to a single PDU Session. The Transfer of UL PDU Session Information procedure may be invoked whenever packets for that particular PDU Session need to be transferred across the related interface instance.

The UL PDU SESSION INFORMATION frame includes a QoS Flow Identifier (QFI) field associated with the transferred packet.

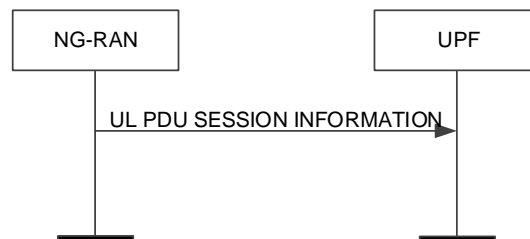

**Figure 5.4.2.1-1: Successful Transfer of UL PDU Session Information**

#### 5.4.2.2 Unsuccessful operation

Void.

## 5.5 Elements for the PDU Session user plane protocol

### 5.5.1 General

In the present document the structure of frames are specified by using figures similar to figure 5.5.1-1.

Bits								Number of Octets	
7	6	5	4	3	2	1	0		
Field 1				Field 2				1	Octet 1
Field 3						Field 4		2	Octet 2
Field 4 continue				Spare					Octet 3
Field 6								2	Octet 4
Field 6 continue				Padding bits					Octet 5
Future Extension								0-m	
Padding								0-3	

**Figure 5.5.1-1: Example frame format**

Unless otherwise indicated, fields which consist of multiple bits within an octet have the most significant bit located at the higher bit position (indicated above frame in figure 5.5.1-1). In addition, if a field spans several octets, most significant bits are located in lower numbered octets (right of frame in figure 5.5.1-1).

On the NG interface, the frame is transmitted starting from the lowest numbered octet. Within each octet, the bits are sent according to decreasing bit position (bit position 7 first).

Spare bits should be set to "0" by the sender and should not be checked by the receiver.

The header part of the frame is always an integer number of octets. The payload part is octet aligned (by adding 'Padding Bits' when needed).

The receiver should be able to remove an additional Future Extension field that may be present. See description of Future Extension field in A.1.

Padding octets may be added at the end of the frame, see Padding in 5.5.3.5.

## 5.5.2 Frame format for the PDU Session user plane protocol

### 5.5.2.1 DL PDU SESSION INFORMATION (PDU Type 0)

This frame format is defined to allow the NG-RAN to receive some control information elements which are associated with the transfer of a packet over the interface.

The following shows the respective DL PDU SESSION INFORMATION frame.



Bits								Number of Octets
7	6	5	4	3	2	1	0	
PDU Type (=0)				Spare				1
PPP	RQI	QoS Flow Identifier						1
PPI			Spare					0 or 1
Padding								0-3

**Figure 5.5.2.1-1: DL PDU SESSION INFORMATION (PDU Type 0) Format**

### 5.5.2.2 UL PDU SESSION INFORMATION (PDU Type 1)

This frame format is defined to allow the UPF to receive some control information elements which are associated with the transfer of a packet over the interface.

The following shows the respective UL PDU SESSION INFORMATION frame.

Bits								Number of Octets
7	6	5	4	3	2	1	0	
PDU Type (=1)				Spare				1
Spare		QoS Flow Identifier						1
Padding								0-3

**Figure 5.5.2.2-1: UL PDU SESSION INFORMATION (PDU Type 1) Format**

## 5.5.3 Coding of information elements in frames

### 5.5.3.1 PDU Type

**Description:** The PDU Type indicates the structure of the PDU session UP frame. The field takes the value of the PDU Type it identifies; i.e. "0" for PDU Type 0. The PDU type is in bit 4 to bit 7 in the first octet of the frame.

**Value range:** {0= DL PDU SESSION INFORMATION, 1=UL PDU SESSION INFORMATION, 2-15=reserved for future PDU type extensions}.

**Field length:** 4 bits.

### 5.5.3.2 Spare

**Description:** The spare field is set to "0" by the sender and should not be interpreted by the receiver. This field is reserved for later versions.

**Value range:**  $(0-2^n-1)$ .

**Field Length:** n bits.

### 5.5.3.3 QoS Flow Identifier (QFI)

**Description:** When present this parameter indicates the QoS Flow Identifier of the QoS flow to which the transferred packet belongs.

**Value range:**  $\{0..2^6-1\}$ .

**Field length:** 6 bits.

### 5.5.3.4 Reflective QoS Indicator (RQI)

**Description:** This parameter indicates activation of the reflective QoS towards the UE for the transferred packet as described in clause 5.4.1.1. It is used only in the downlink direction. If RQA (Reflective QoS Activation) has not been configured for the involved QoS flow, the RQI shall be ignored by the NG-RAN node.

**Value range:** {0= Reflective QoS activation not triggered, 1= Reflective QoS activation triggered}.

**Field length:** 1 bit.

### 5.5.3.5 Padding

**Description:** The padding is included at the end of the frame to ensure that the PDU Session user plane protocol PDU length (including padding and the future extension) is  $(n*4-2)$  octets, where n is a positive integer. If there is any future extension, the padding should be added after the future extensions.

**Field Length:** 0–3 octets.

### 5.5.3.6 Paging Policy Presence (PPP)

**Description:** This parameter indicates the presence of the Paging Policy Indicator (PPI).

**Value range:** {0= Paging Policy Indicator not present, 1= Paging Policy Indicator present}.

**Field length:** 1 bit.

### 5.5.3.7 Paging Policy Indicator (PPI)

**Description:** When present, the Paging Policy Indicator is used for paging policy differentiation (see details in 3GPP TS 23.501 [5]). This field applies to PDU sessions of IP type.

**Value range:**  $\{0..2^3-1\}$ .

**Field length:** 3 bits.

## 5.5.4 Timers

Void.

## 5.6 Handling of unknown, unforeseen and erroneous protocol data

Void.

---

# Annex A (informative): Example of using Future Extension Field

---

## A.1 Example of using Future Extension field

New IE flag 7(E)	New IE flag 6	New IE flag 5	New IE flag 4	New IE flag 3	New IE flag 2	New IE flag 1	New IE flag 0	1 Octet New IE Flags
New IE 1								3 Octets
New IE 2								2 Octets

Figure A.1-1: Example of future Extension Field

In the Example of the future Extension Field, New IE flag 0 indicates if the New IE 1 is present or not. New IE flag 1 indicates if the new IE 2 is present or not.

### A.1.1 New IE Flags

**Description:** The *New IE Flags* IE is only present if at least one new IE is present. The *New IE Flags* IE contains flags indicating which new IEs that are present following the *New IE Flags* IE. The last bit position of the *New IE Flags* IE is used as the Extension Flag to allow the extension of the *New IE Flags* IE in the future. Extension octets of the *New IE Flags* IE shall follow directly after the first octet of the *New IE Flags* IE. When an extension octet of the *New IE Flags* IE is present, then all previous extension octets of the *New IE Flags* IE and the *New IE Flags* IE shall also be present, even if they have all their flag bits indicating no presence of their respective new IEs.

## Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2018-04	R3#99bis	R3-181720				TS skeleton.	0.0.1
2018-04	R3#99bis	R3-182525				Integration of R3-182399 with sections 4 and 5 and annex A1.	0.1.0
2018-05	R3#100	R3-183594				Integration of R3-182619 to remove editor's notes, remove FFS and fix some editorials; integration of R3-183413 introducing PDU type for downlink and uplink; removing the FFS of uplink frame type in line with R3-182619 for downlink frame type; integration of R3-183000 solving the FFS on QFI.	0.2.0
2018-06	RAN#80	RP-180740				For approval.	1.0.0
2018-06	RAN#80		-	-	-	Specification approved at TSG-RAN and placed under change control	15.0.0
2018-09	RAN#81	RP-181922	0001	4	F	NR Corrections (38.415 Baseline CR covering RAN3#101 agreements)	15.1.0
2018-12	RAN#82	RP-182446	0003	-	F	Rapporteur's CR for TS38.415	15.2.0