
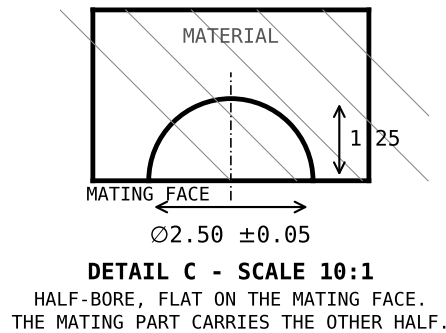
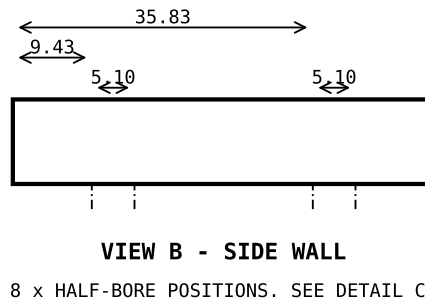


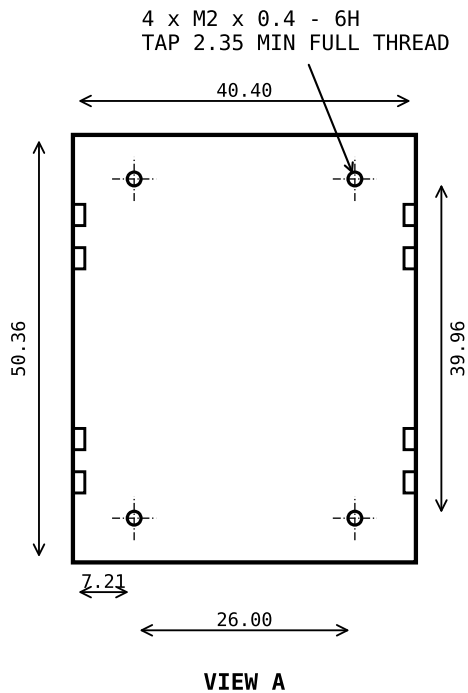

NOTES

1. MATERIAL: ALUMINIUM 6061-T6.
2. DIMENSIONS IN MILLIMETRES. GENERAL TOL. ISO 2768-m.
3. SURFACE ROUGHNESS 3.2 μm Ra ON ALL FACES.
4. THICK SHELL, 10.10, CARRIES THE BOARD.
5. VIEW A: 4 x M2 x 0.4 - 6H TAPPED, 2.35 MIN FULL THREAD.
6. VIEW B AND DETAIL C: 8 x $\varnothing 2.50$ HALF-BORES CUT INTO THE MATING FACE, 1.25 DEEP, AT THE POSITIONS SHOWN.
THE TOP BEZEL CARRIES THE MATCHING HALVES, SO THE ASSEMBLED BORE IS A FULL $\varnothing 2.50$.
7. THE BUTTON POST IS $\varnothing 2.30$: 0.20 CLEARANCE AS DESIGNED.
DO NOT TIGHTEN THIS FIT.
8. FINISH: BEAD BLAST, THEN ANODISE TYPE II.
9. MASK THREADS AND HALF-BORES BEFORE ANODISING.
10. BREAK ALL SHARP EDGES 0.2 MAX.

GEOMETRY FROM Armadillonium_Model.step (sqfmi/watchy-cases, MIT). TAKE ALL PROFILES FROM THE 3D FILE. VERIFY AGAINST A PHYSICAL SAMPLE.

TITLE ARMADILLONIUM BOTTOM SHELL	PART WATCHYCASE BOTTOM	MATERIAL AL 6061-T6	QTY 21
DRAWN FOR BTC TECHNOLOGIES / BWATCH bw-1	UNITS MILLIMETRE	GENERAL TOL ISO 2768-m	SHEET 1 OF 1 · A4