
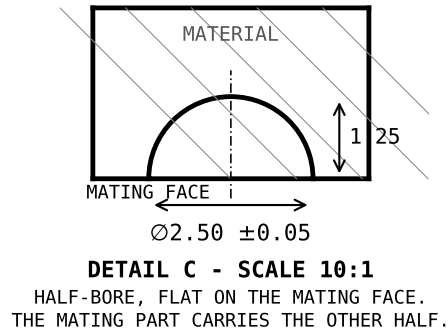
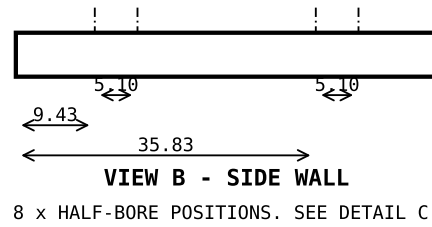


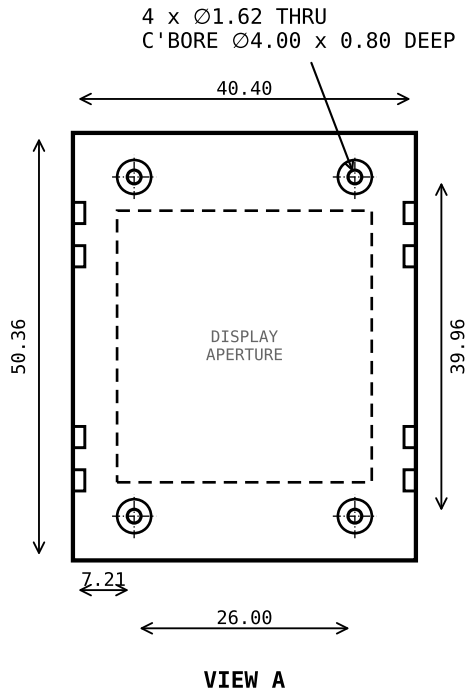

NOTES

1. MATERIAL: ALUMINIUM 6061-T6.
2. DIMENSIONS IN MILLIMETRES. GENERAL TOL. ISO 2768-m.
3. SURFACE ROUGHNESS 3.2 μm Ra ON ALL FACES.
4. FRONT BEZEL, 5.25, OPEN THROUGH THE MIDDLE FOR THE DISPLAY. NO THREADS IN THIS PART.
5. VIEW A: 4 x Ø1.62 THRU, C'BORE Ø4.00 x 0.80 DEEP ON THE OUTER FACE. M2 x 6 SCREWS PASS THROUGH AND THREAD INTO THE BOTTOM SHELL.
6. VIEW B AND DETAIL C: 8 x Ø2.50 HALF-BORES CUT INTO THE MATING FACE, 1.25 DEEP, AT THE POSITIONS SHOWN. THE BOTTOM SHELL CARRIES THE MATCHING HALVES.
7. THE BUTTON POST IS Ø2.30: 0.20 CLEARANCE AS DESIGNED.
8. FINISH: BEAD BLAST, THEN ANODISE TYPE II. MOST VISIBLE PART - MATCH THE SHELL.
9. MASK THE HALF-BORES BEFORE ANODISING.
10. BREAK ALL SHARP EDGES 0.2 MAX.

GEOMETRY FROM Armadillonium_Model.step (sqfmi/watchy-cases, MIT). TAKE ALL PROFILES FROM THE 3D FILE. VERIFY AGAINST A PHYSICAL SAMPLE.

TITLE ARMADILLONIUM TOP BEZEL	PART WATCHYCASE TOP	MATERIAL AL 6061-T6	QTY 21
DRAWN FOR BTC TECHNOLOGIES / BWATCH bw-1	UNITS MILLIMETRE	GENERAL TOL ISO 2768-m	SHEET 1 OF 1 · A4