Bulletin PD-2.396 rev. D 02/01

International
IOR Rectifier

10BQ015

SCHOTTKY RECTIFIER 1 Amp



SMB

Major Ratings and Characteristics

Characteristics		10BQ015	Units
$I_{F(AV)}$	Rectangular waveform	1.0	A
V_{RRM}		15	V
I_{FSM}	@tp = 5 µs sine	140	A
V_F	@1.0Apk, T_J=125°C	0.32	V
T_J	range	- 55 to 125	°C

Description/Features

The 10BQ015 surface mount Schottky rectifier has been designed for applications requiring low forward drop and very small foot prints on PC boards. The proprietary barrier technology allows for reliable operation up to 125°C junction temperature. Typical applications are in disk drives, switching power supplies, converters, free-wheeling diodes, battery charging, and reverse battery protection.

- 125°C T_J operation (V_R < 5V)
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance

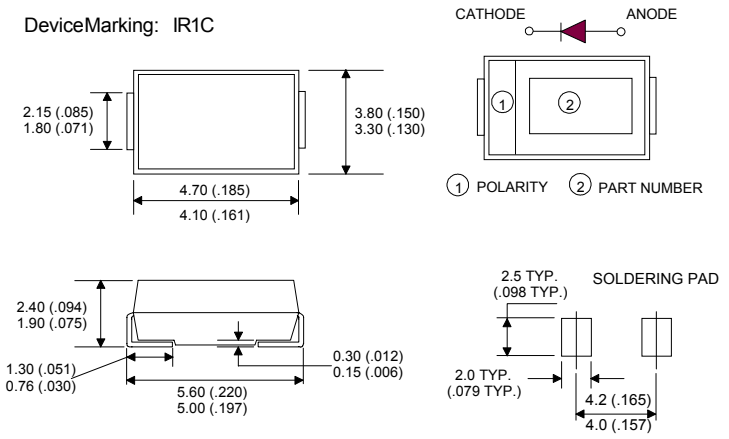

Outline SMB

Dimensions in millimeters and (inches)

Note : for more information about SMD soldering, please refer to Technical Note AN994.

Voltage Ratings

	Part number	10BQ015
V_R	Max. DC Reverse Voltage (V)	15
V_{RWM}	Max. Working Peak Reverse Voltage (V)	25

Absolute Maximum Ratings

	Parameters	10BQ	Units	Conditions	
$I_{F(AV)}$	Max. Average Forward Current * See Fig. 5	1.0	A	50% duty cycle @ T_C = 84 °C, rectangular wave form	
I_{FSM}	Max. Peak One Cycle Non-Repetitive	140	A	5µs Sine or 3µs Rect. pulse	Following any rated load condition and with rated V_{RRM} applied
	Surge Current * See Fig. 7	40		10ms Sine or 6ms Rect. pulse	
E_{AS}	Non-Repetitive Avalanche Energy	5.0	mJ	T_J = 25 °C, I_{AS} = 0.2A, L = 4.2mH	
I_{AR}	Repetitive Avalanche Current	0.2	A	Current decayng linearly to zero in 1 µsec Frequency limited by T_J max. V_A = 1.5 x V_R typical	

Electrical Specifications

	Parameters	10BQ	Units	Conditions	
V_{FM}	Max. Forward Voltage Drop (1) * See Fig. 1	0.35	V	@ 1.0A	T_J = 25 °C
		0.44	V	@ 2.0A	
		0.32	V	@ 1.0A	T_J = 125 °C
		0.40	V	@ 2.0A	
I_{RM}	Max. Reverse Leakage Current (1) * See Fig. 2	0.5	mA	T_J = 25 °C	V_R = rated V_R
		12	mA	T_J = 100 °C	
$V_{F(TO)}$	Threshold Voltage	....	V	T_J = T_J max.	
r_t	Forward Slope Resistance	....	mΩ		
C_T	Typical Junction Capacitance	390	pF	V_R = 5V_{DC}, (test signal range 100KHz to 1MHz) 25°C	
L_S	Typical Series Inductance	2.0	nH	Measured lead to lead 5mm from package body	
dv/dt	Max. Voltage Rate of Change (Rated V_R)	6,000	V/µs		

(1) Pulse Width < 300µs, Duty Cycle < 2%

Thermal-Mechanical Specifications

	Parameters	10BQ	Units	Conditions
T_J	Max. Junction Temperature Range	-55 to 125	°C	
T_{stg}	Max. Storage Temperature Range	-55 to 150	°C	
R_{thJA}	Max. Thermal Resistance Junction to Ambient	140	°C/W	DC operation
R_{thJL}	Max. Thermal Resistance Junction to Lead (2)	36	°C/W	DC operation
wt	Approximate Weight	0.10	g	
	Case Style	SMB		Similar to DO-214AA
	Device Marking	IR1B		

(2) Mounted 1 inch square PCB, thermal probe connected to lead 2 mm from package

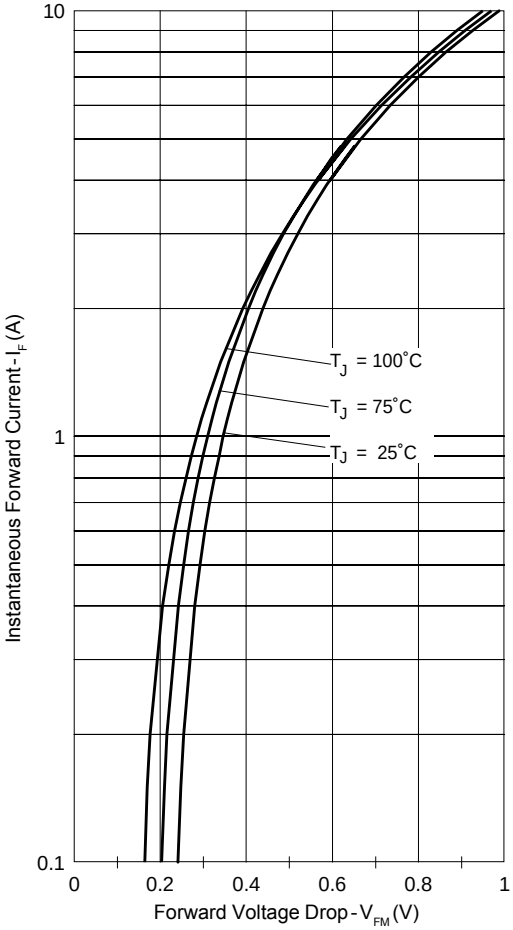

Fig. 1 - Max. Forward Voltage Drop Characteristics

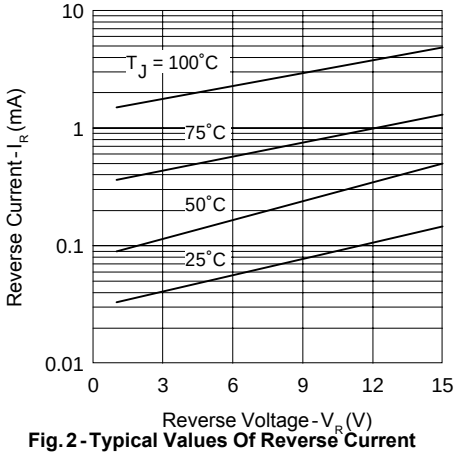

Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

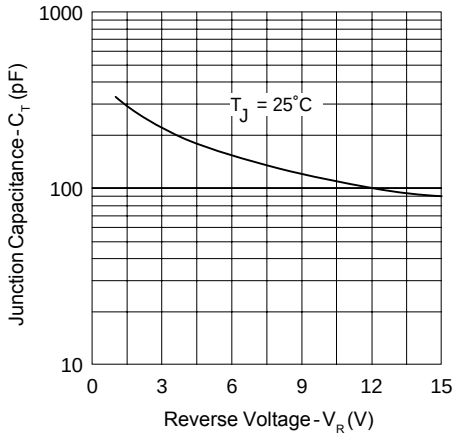

Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

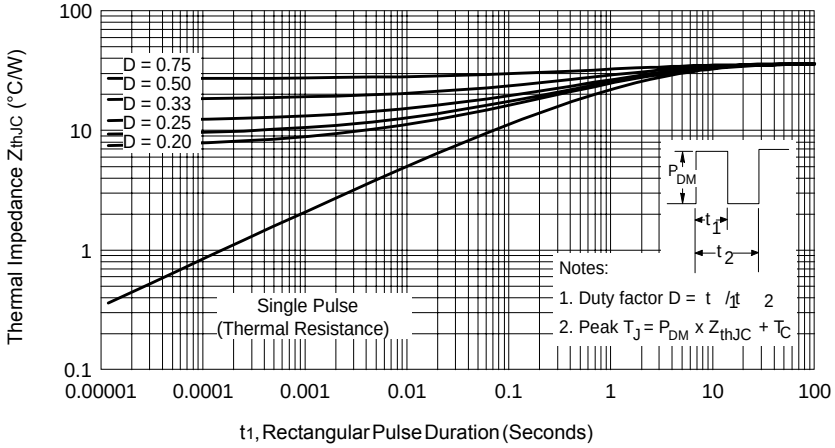

Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

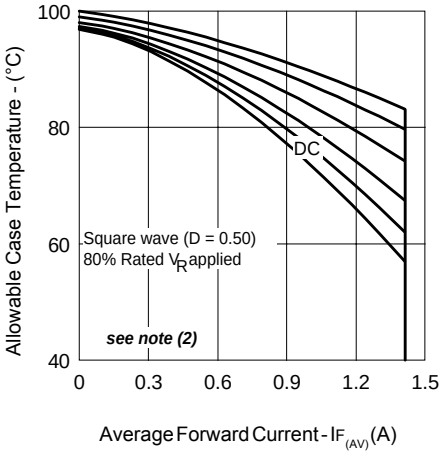

Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

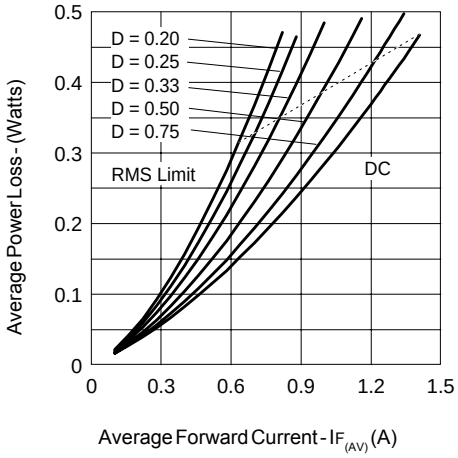

Fig. 6 - Forward Power Loss Characteristics

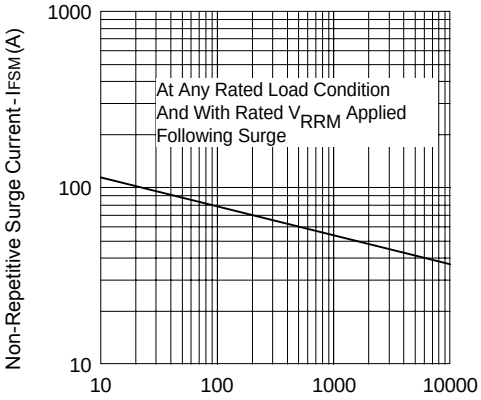

Fig. 7 - Max. Non-Repetitive Surge Current

(2) Formula used: $T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}$;
Pd = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
Pd_{REV} = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1}$ = 80% rated V_R

Tape & Reel Information

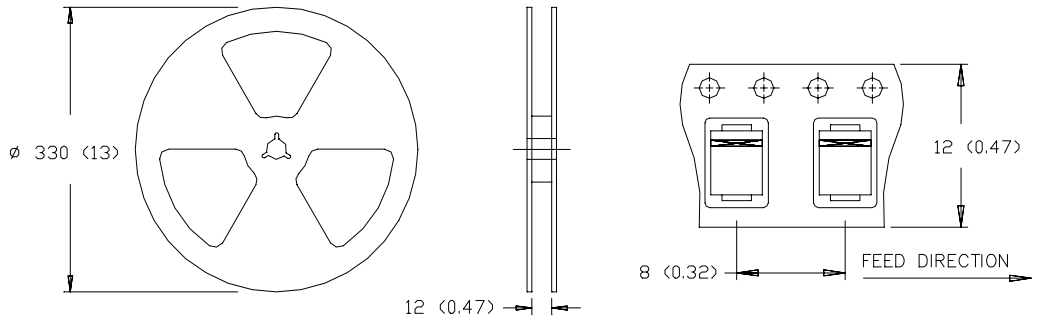

NOTE:
1. OUTLINE CONFORMS TO EIA-481.

Dimensions in millimeters and (inches)

Marking & Identification

Each device has 4 characters, configurated two digits on two rows, for identification. The first row designates the device as manufactured by International Rectifier as indicated by the letters "IR". The second row indicates the current rating and voltage/process. See the drawing below for marking code.

FIRST ROW

IR

SECOND ROW

1st DIGIT = CURRENT RATING
2nd DIGIT = VOLTAGE/PROCESS

EXAMPLE: IR —— INTERNATIONAL RECTIFIER
1F —— 40 VOLT/STANDARD PROCESS
└—— 1 AMP

1st DIGIT	2nd DIGIT
CURRENT	VOLTAGE/PROCESS
1 = 1 AMP	C = 15 VOLTS/STANDARD
	E = 30 VOLTS
	F = 40 VOLTS
	H = 60 VOLTS
	J = 100 VOLTS

Ordering Information

10BQ SERIES - TAPE AND REEL

WHEN ORDERING, INDICATE THE PART NUMBER AND THE QUANTITY (IN MULTIPLES OF 3000 PIECES).

EXAMPLE: 10BQ015TR - 6000 PIECES

10BQ SERIES - BULK QUANTITIES

WHEN ORDERING, INDICATE THE PART NUMBER AND THE QUANTITY (IN MULTIPLES OF 1000 PIECES).

EXAMPLE: 10BQ015 - 2000 PIECES

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 02/01