


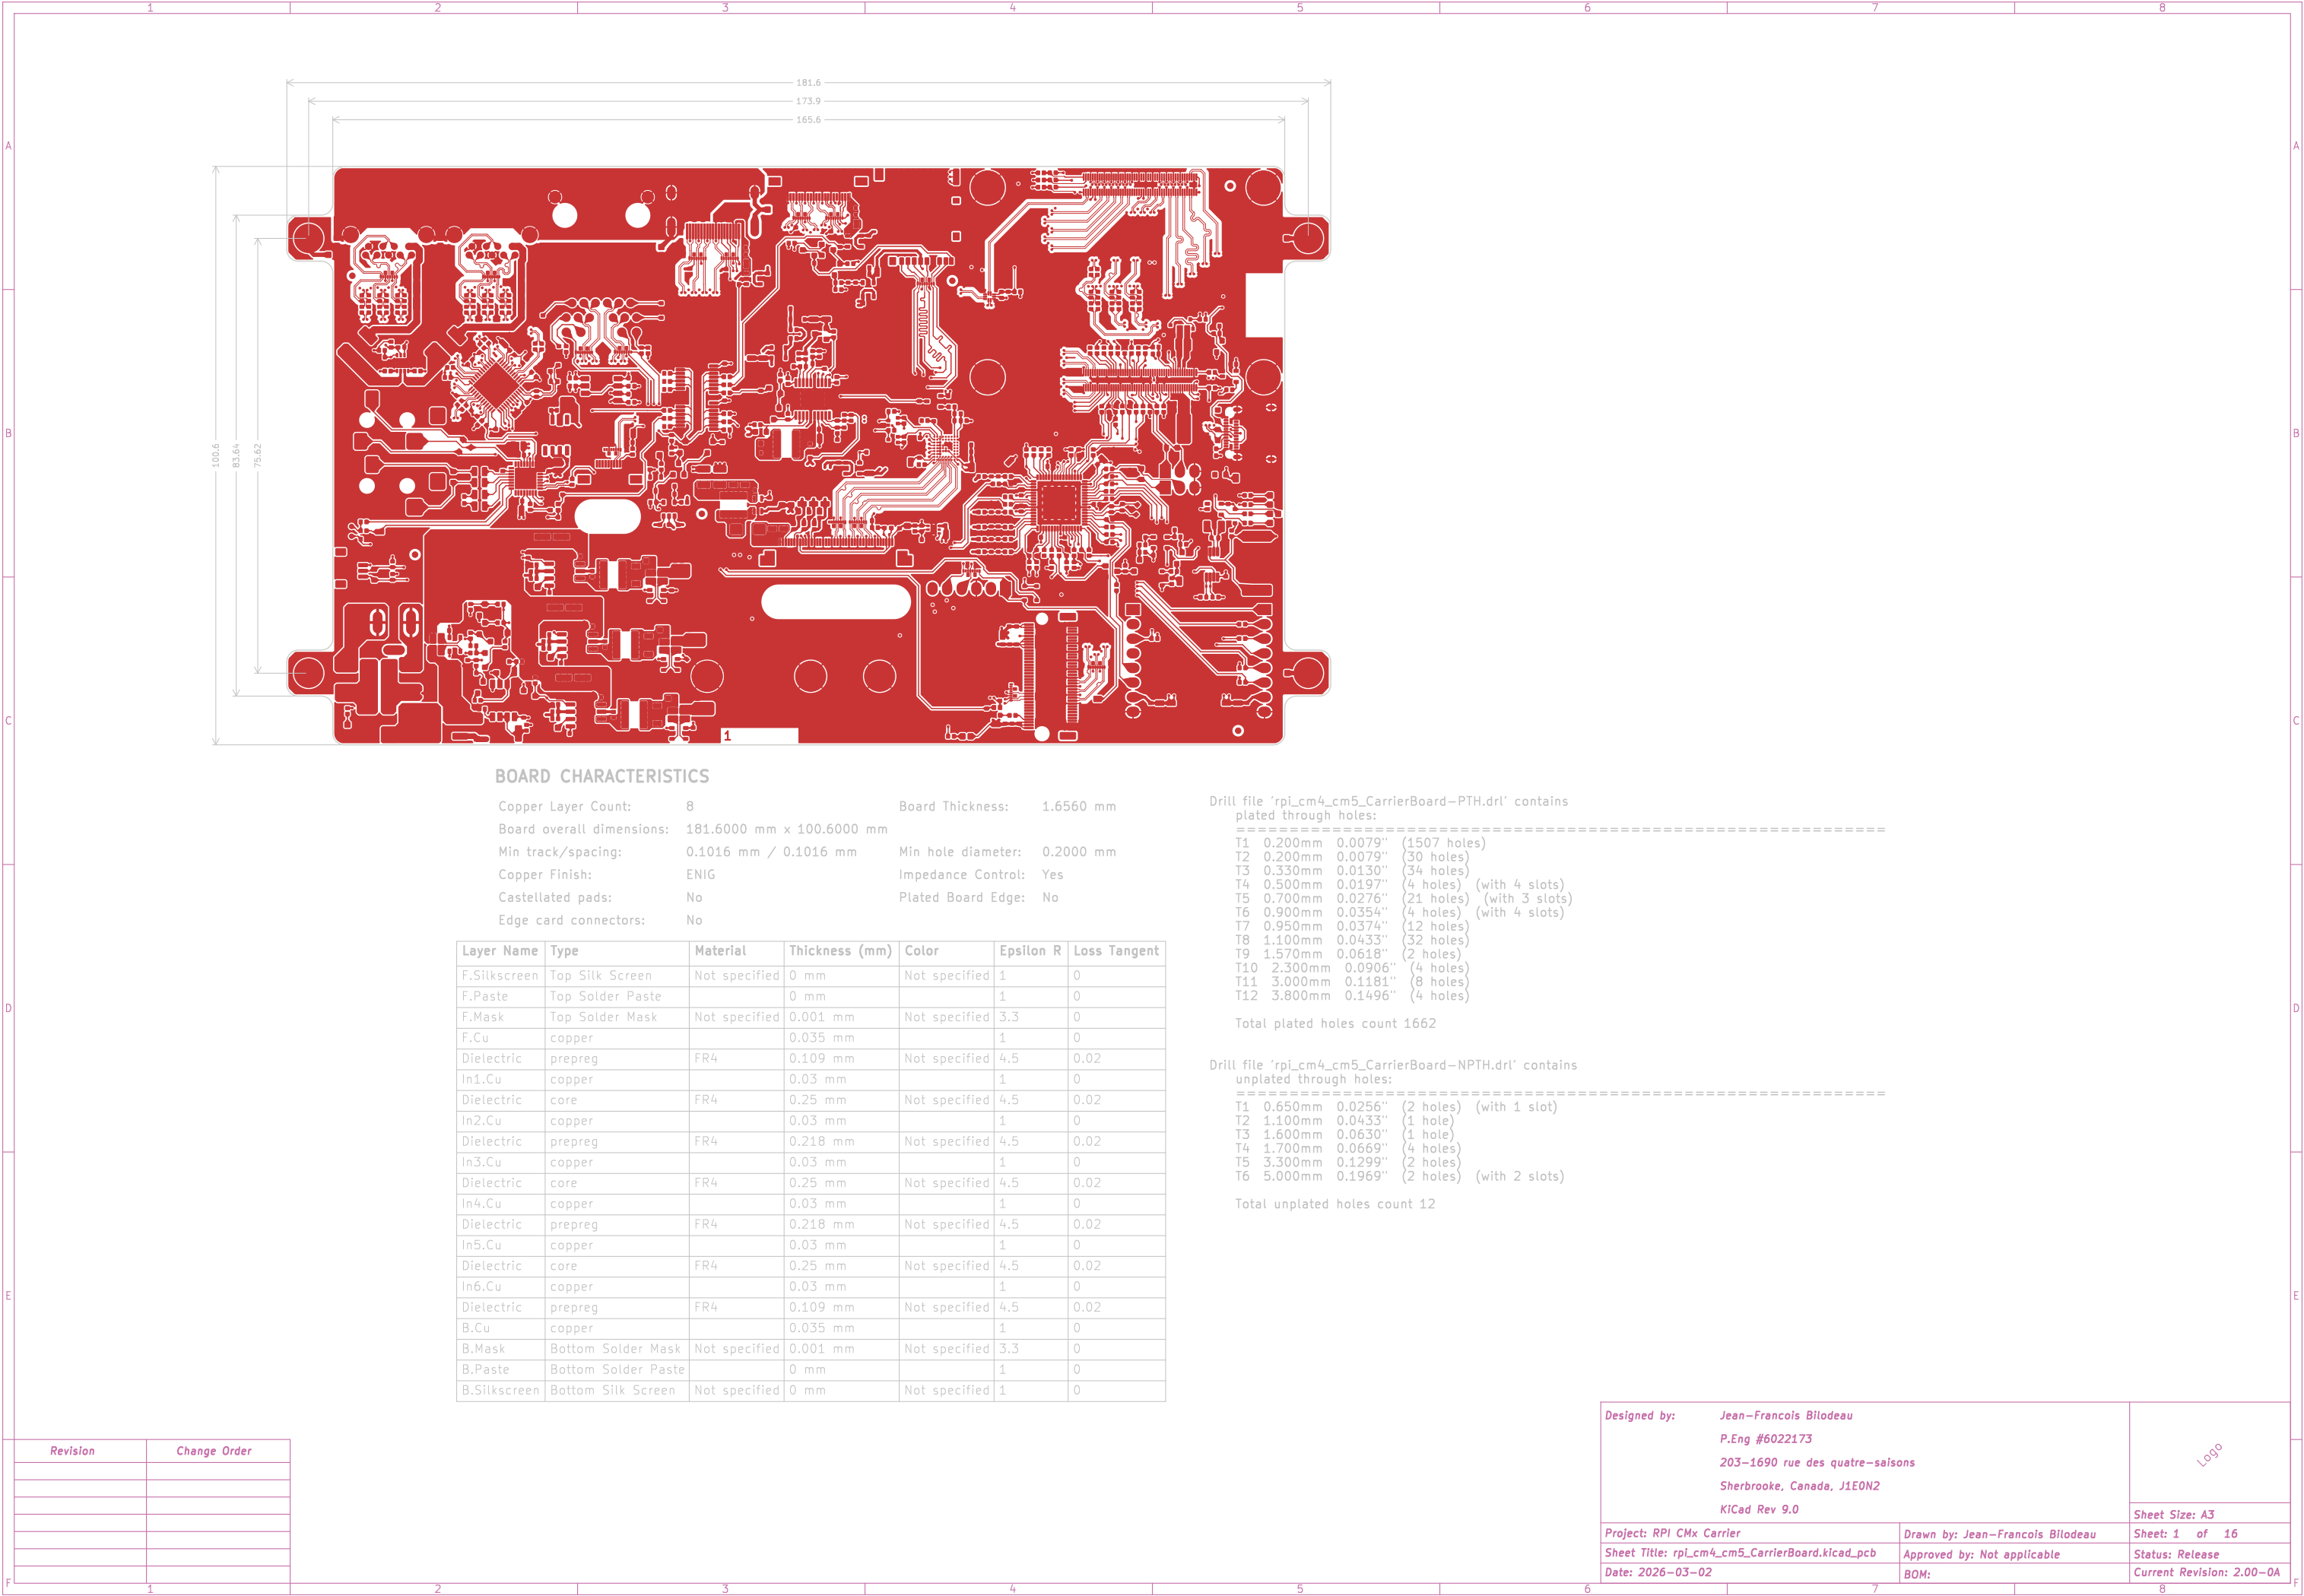

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard--PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard--NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo
Project: RPI CMx Carrier		Sheet Size: A3
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Drawn by: Jean-Francois Bilodeau	Sheet: 1 of 16
Date: 2026-03-02	Approved by: Not applicable	Status: Release
	BOM:	Current Revision: 2.00-0A
	7	8

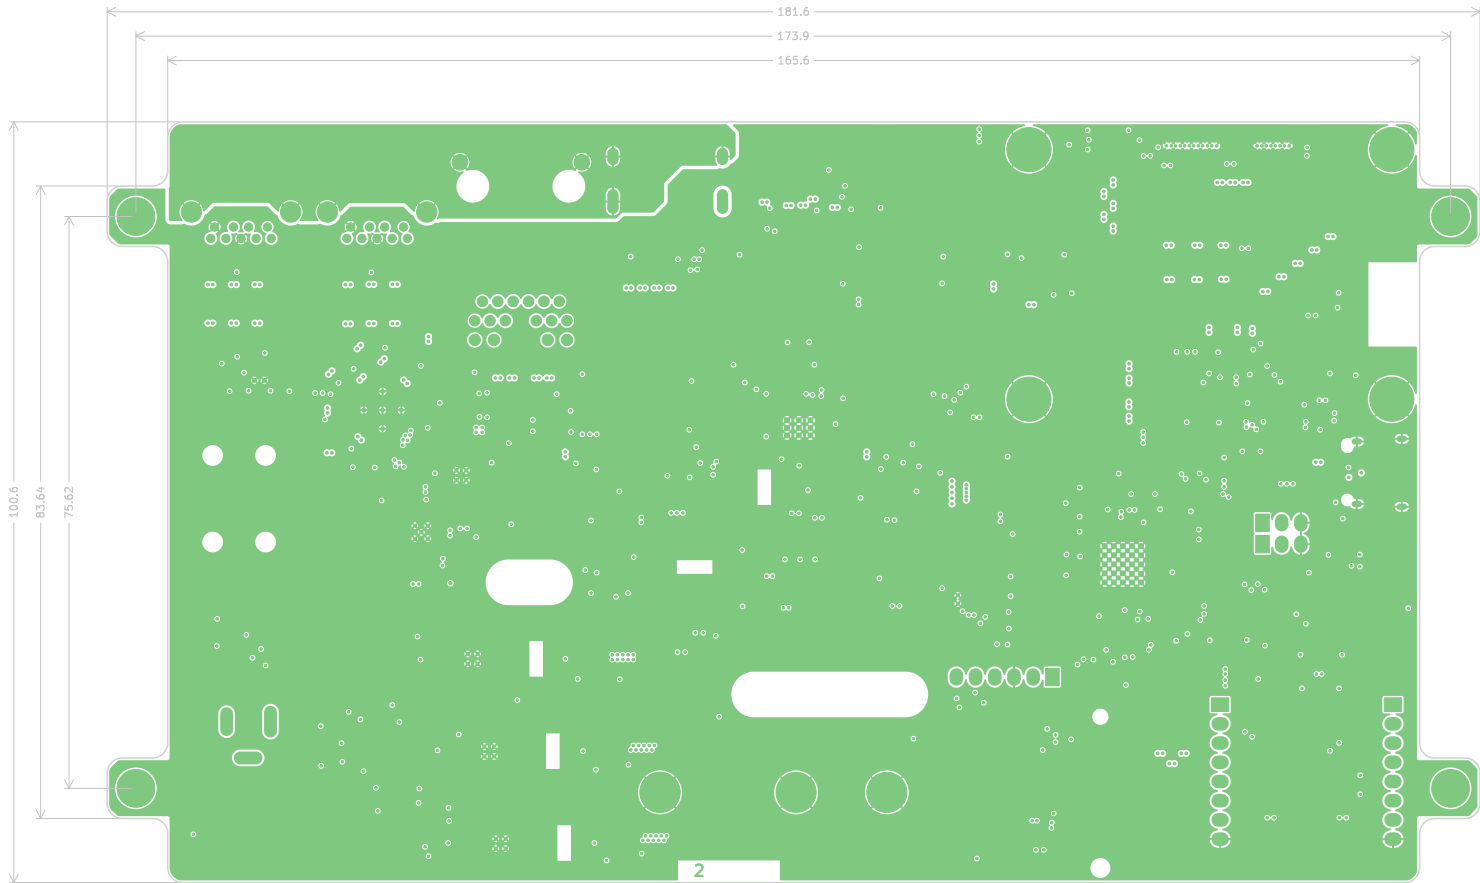

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4,5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4,5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4,5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4,5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4,5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4,5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4,5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3,3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KiCad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Status: Release
Date: 2026-03-02	BOM:	Current Revision: 2.00-0A

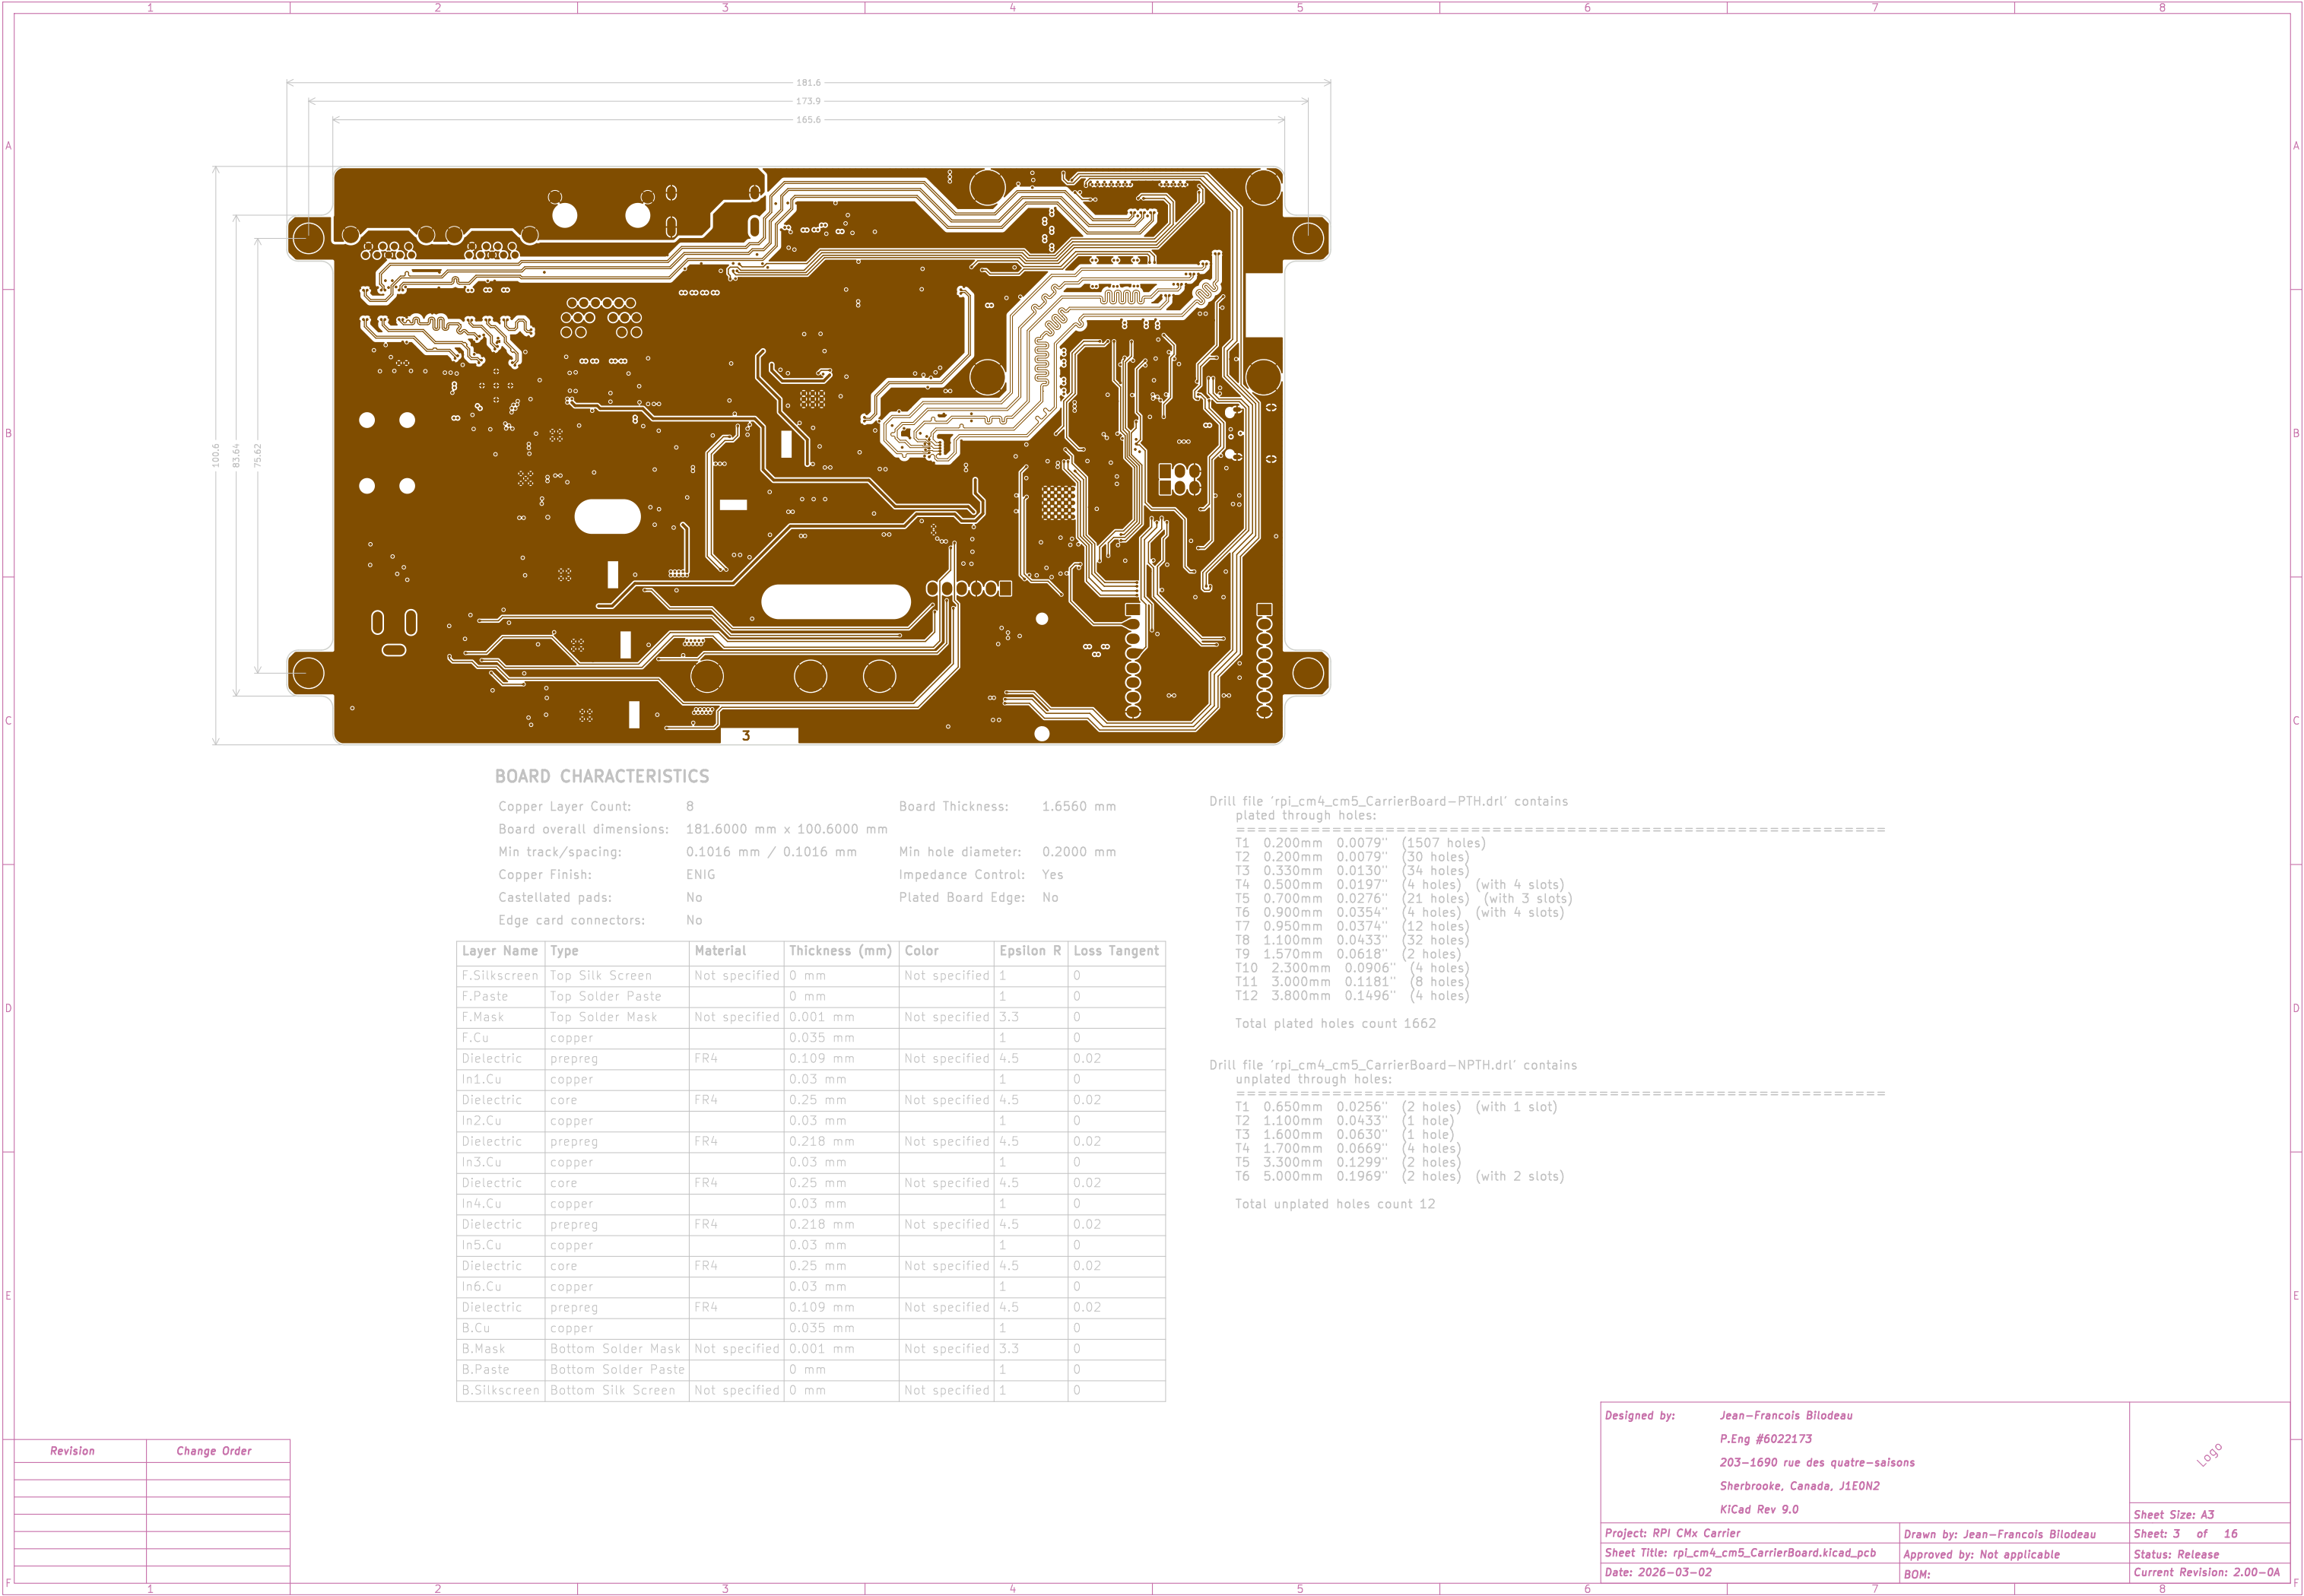

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12


Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 3 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A

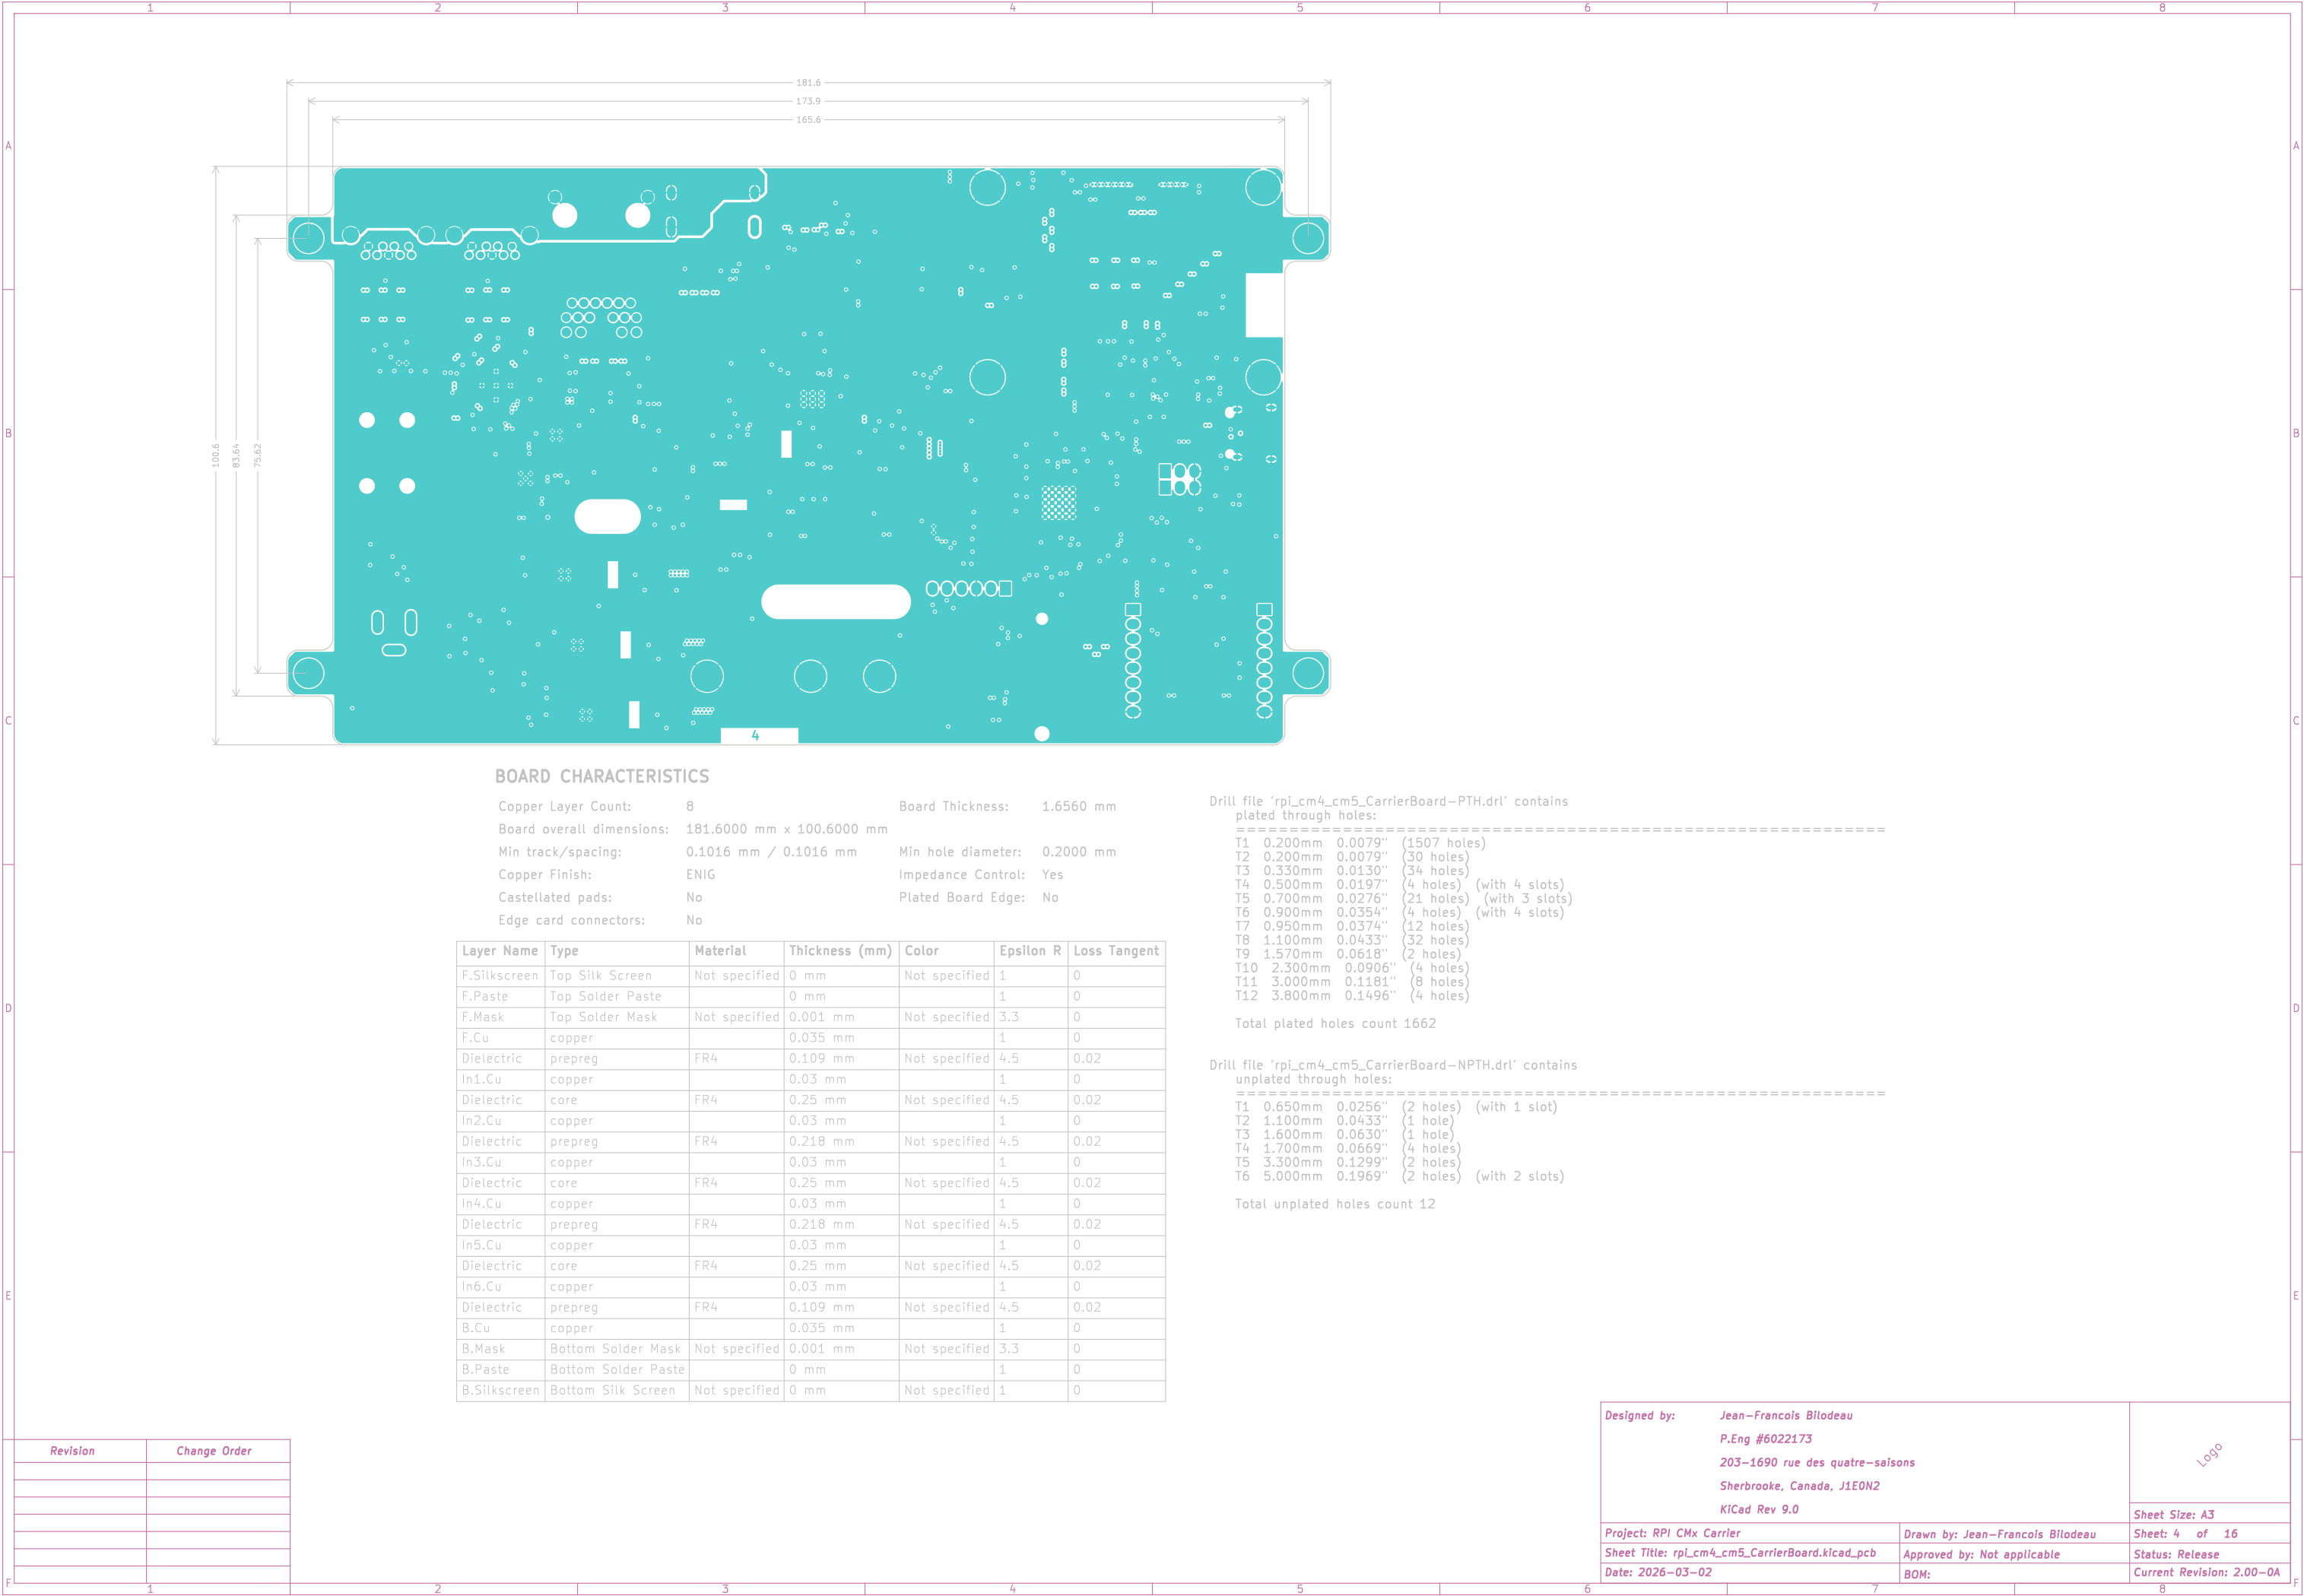

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KiCad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 4 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A

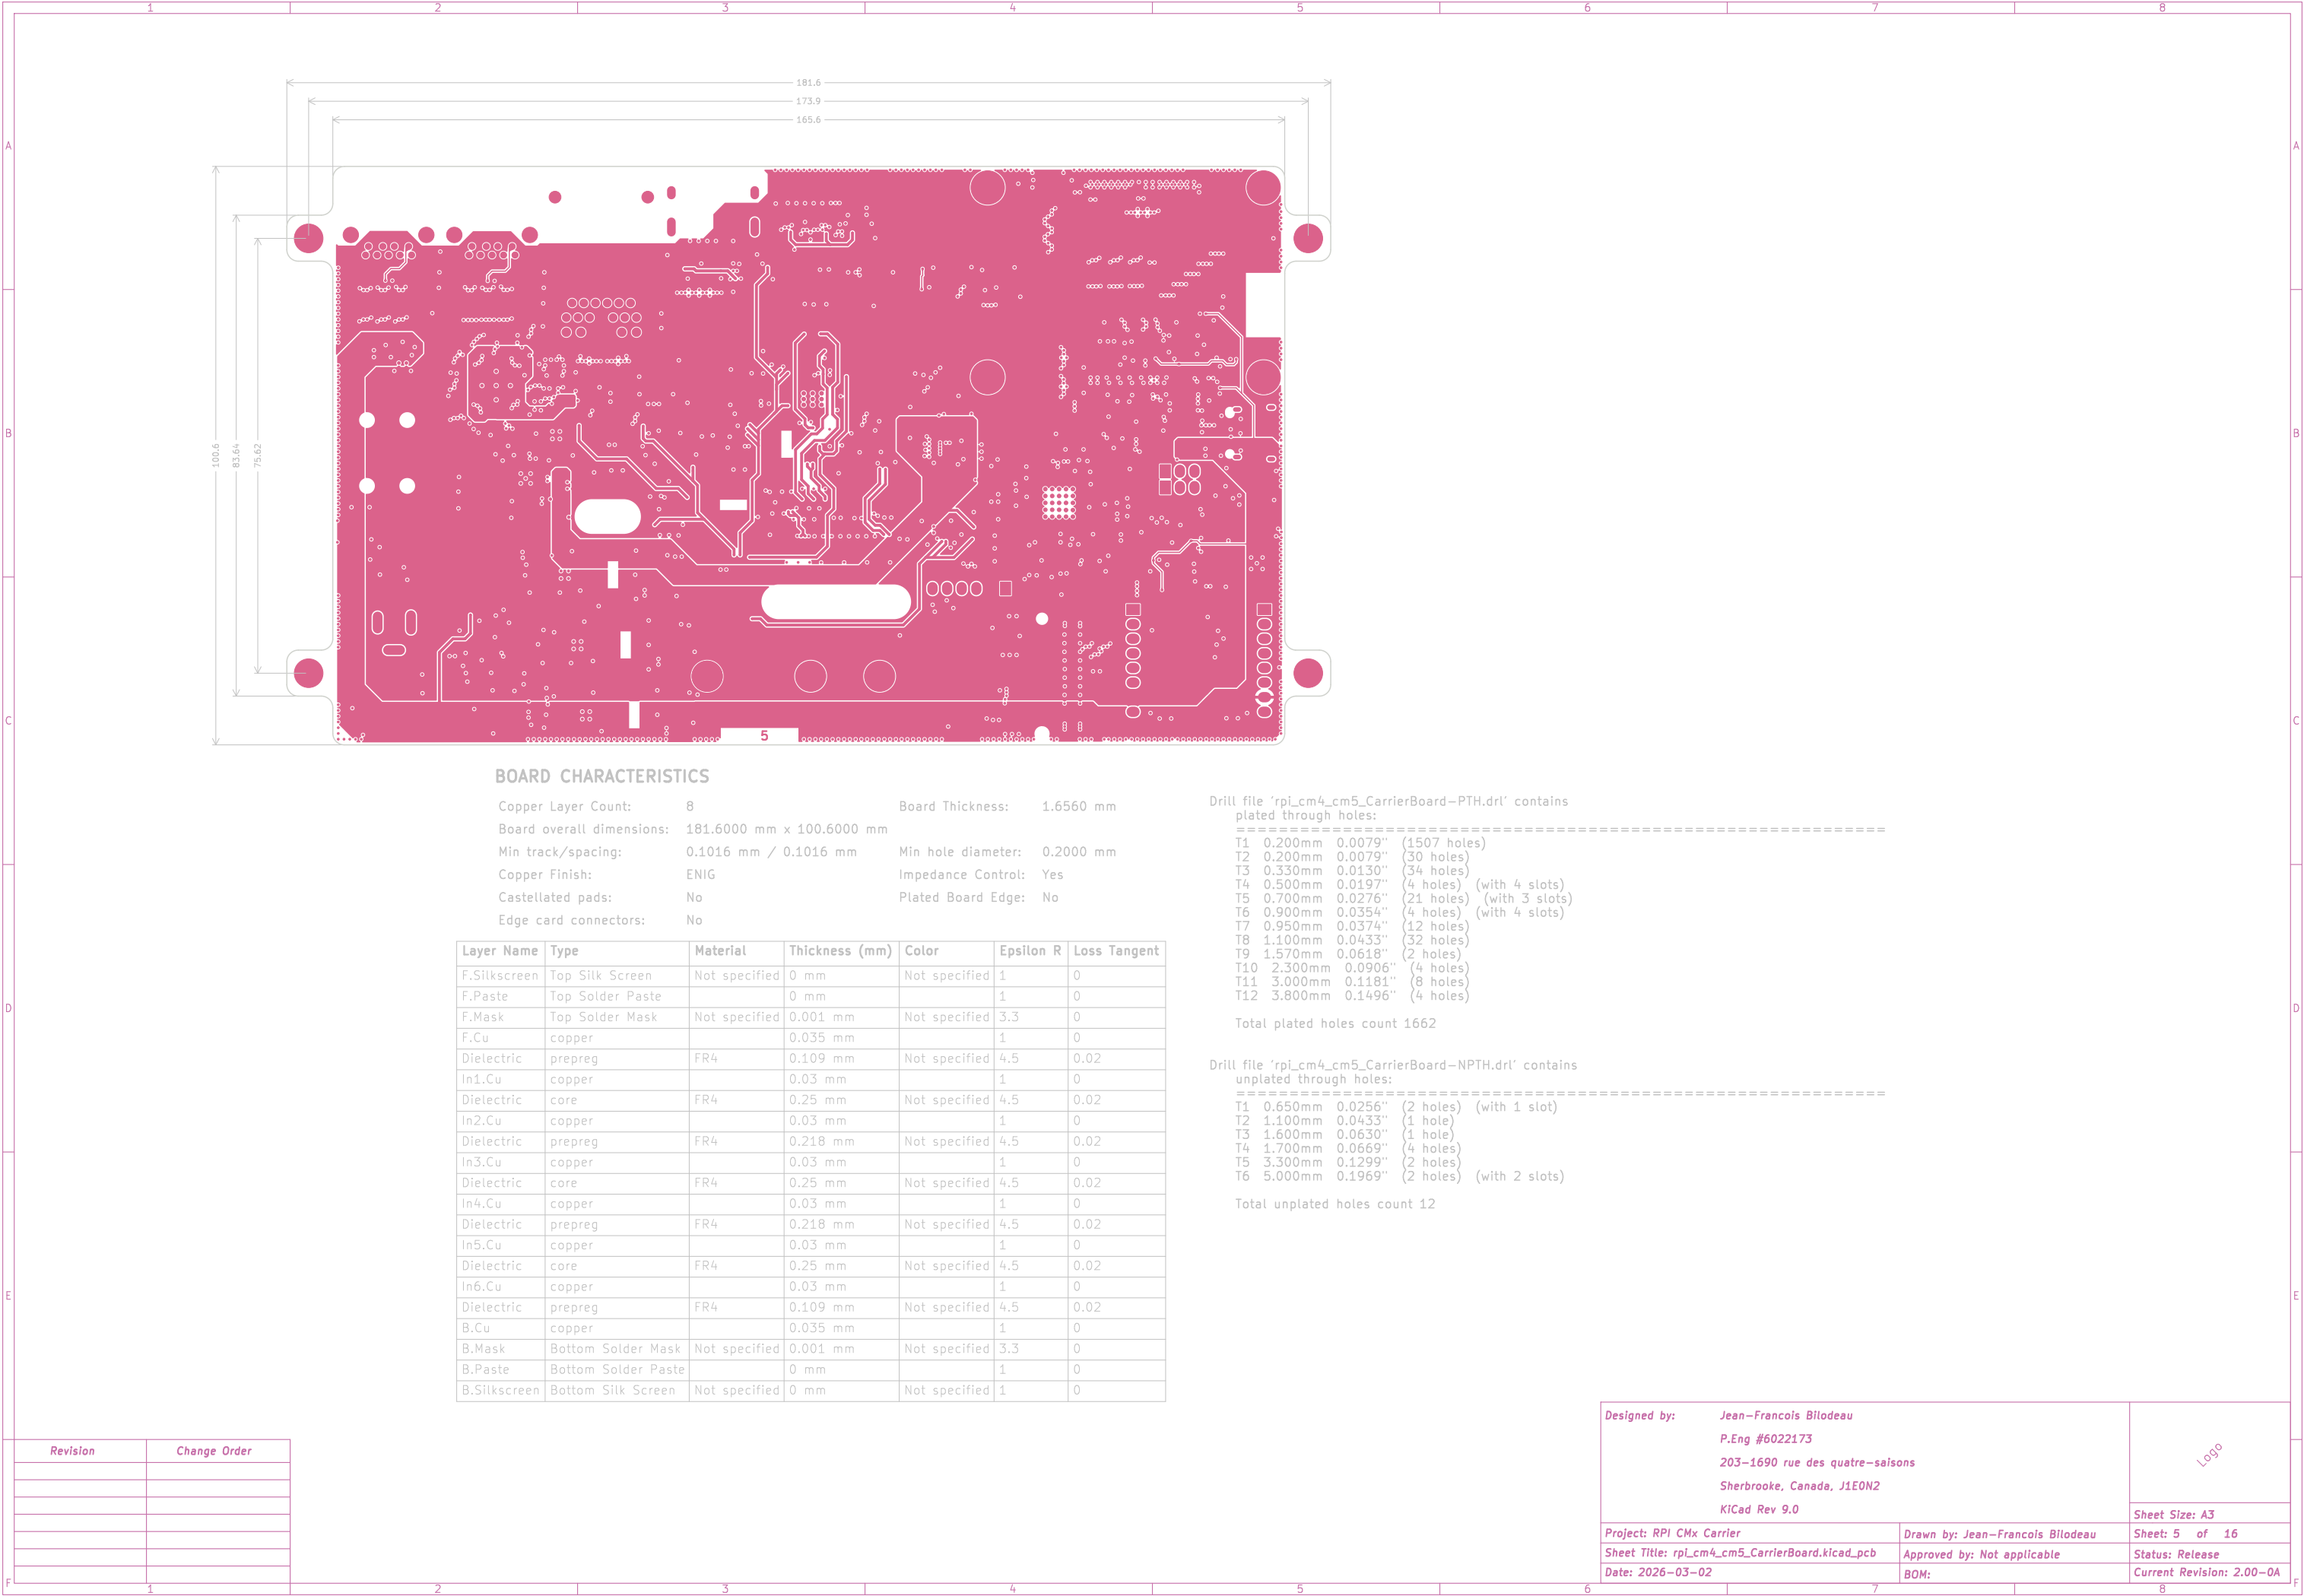

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)


Total plated holes count 1662

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	Sheet: 5 of 16
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Status: Release
Date: 2026-03-02	BOM:	Current Revision: 2.00-0A

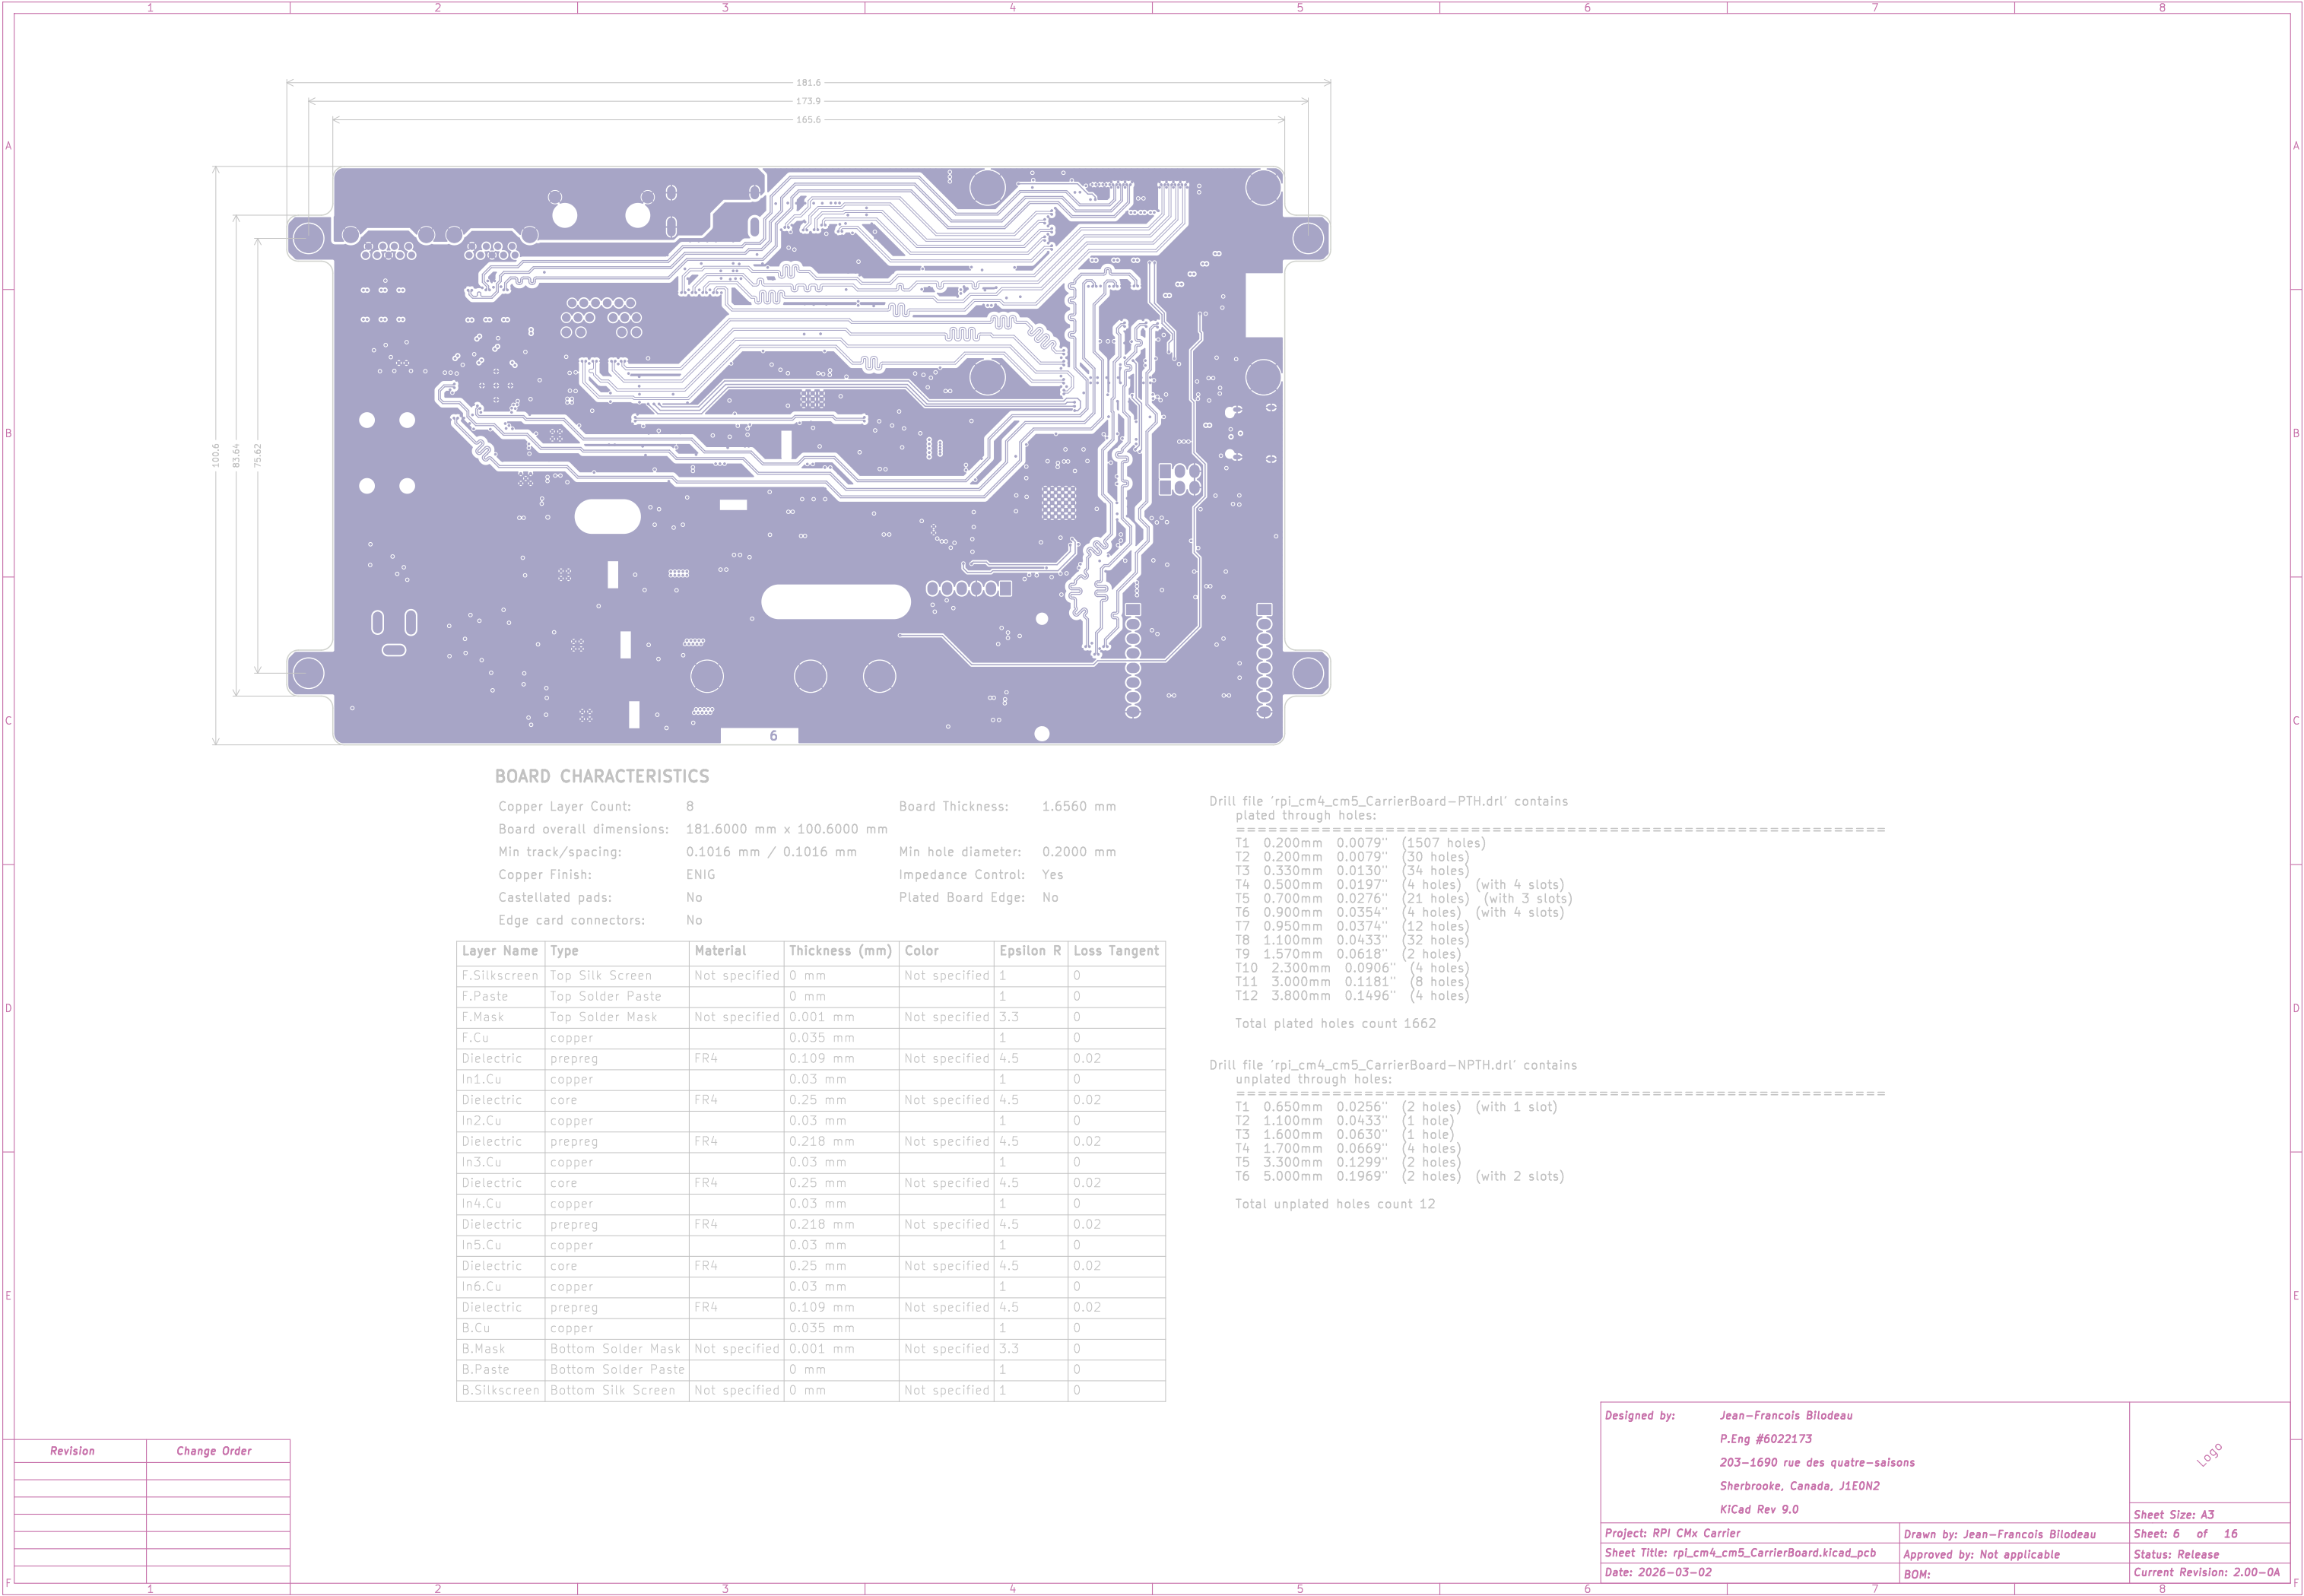

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1016 mm / 0.1016 mm	Min hole diameter:	0.2000 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KiCad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 6 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A

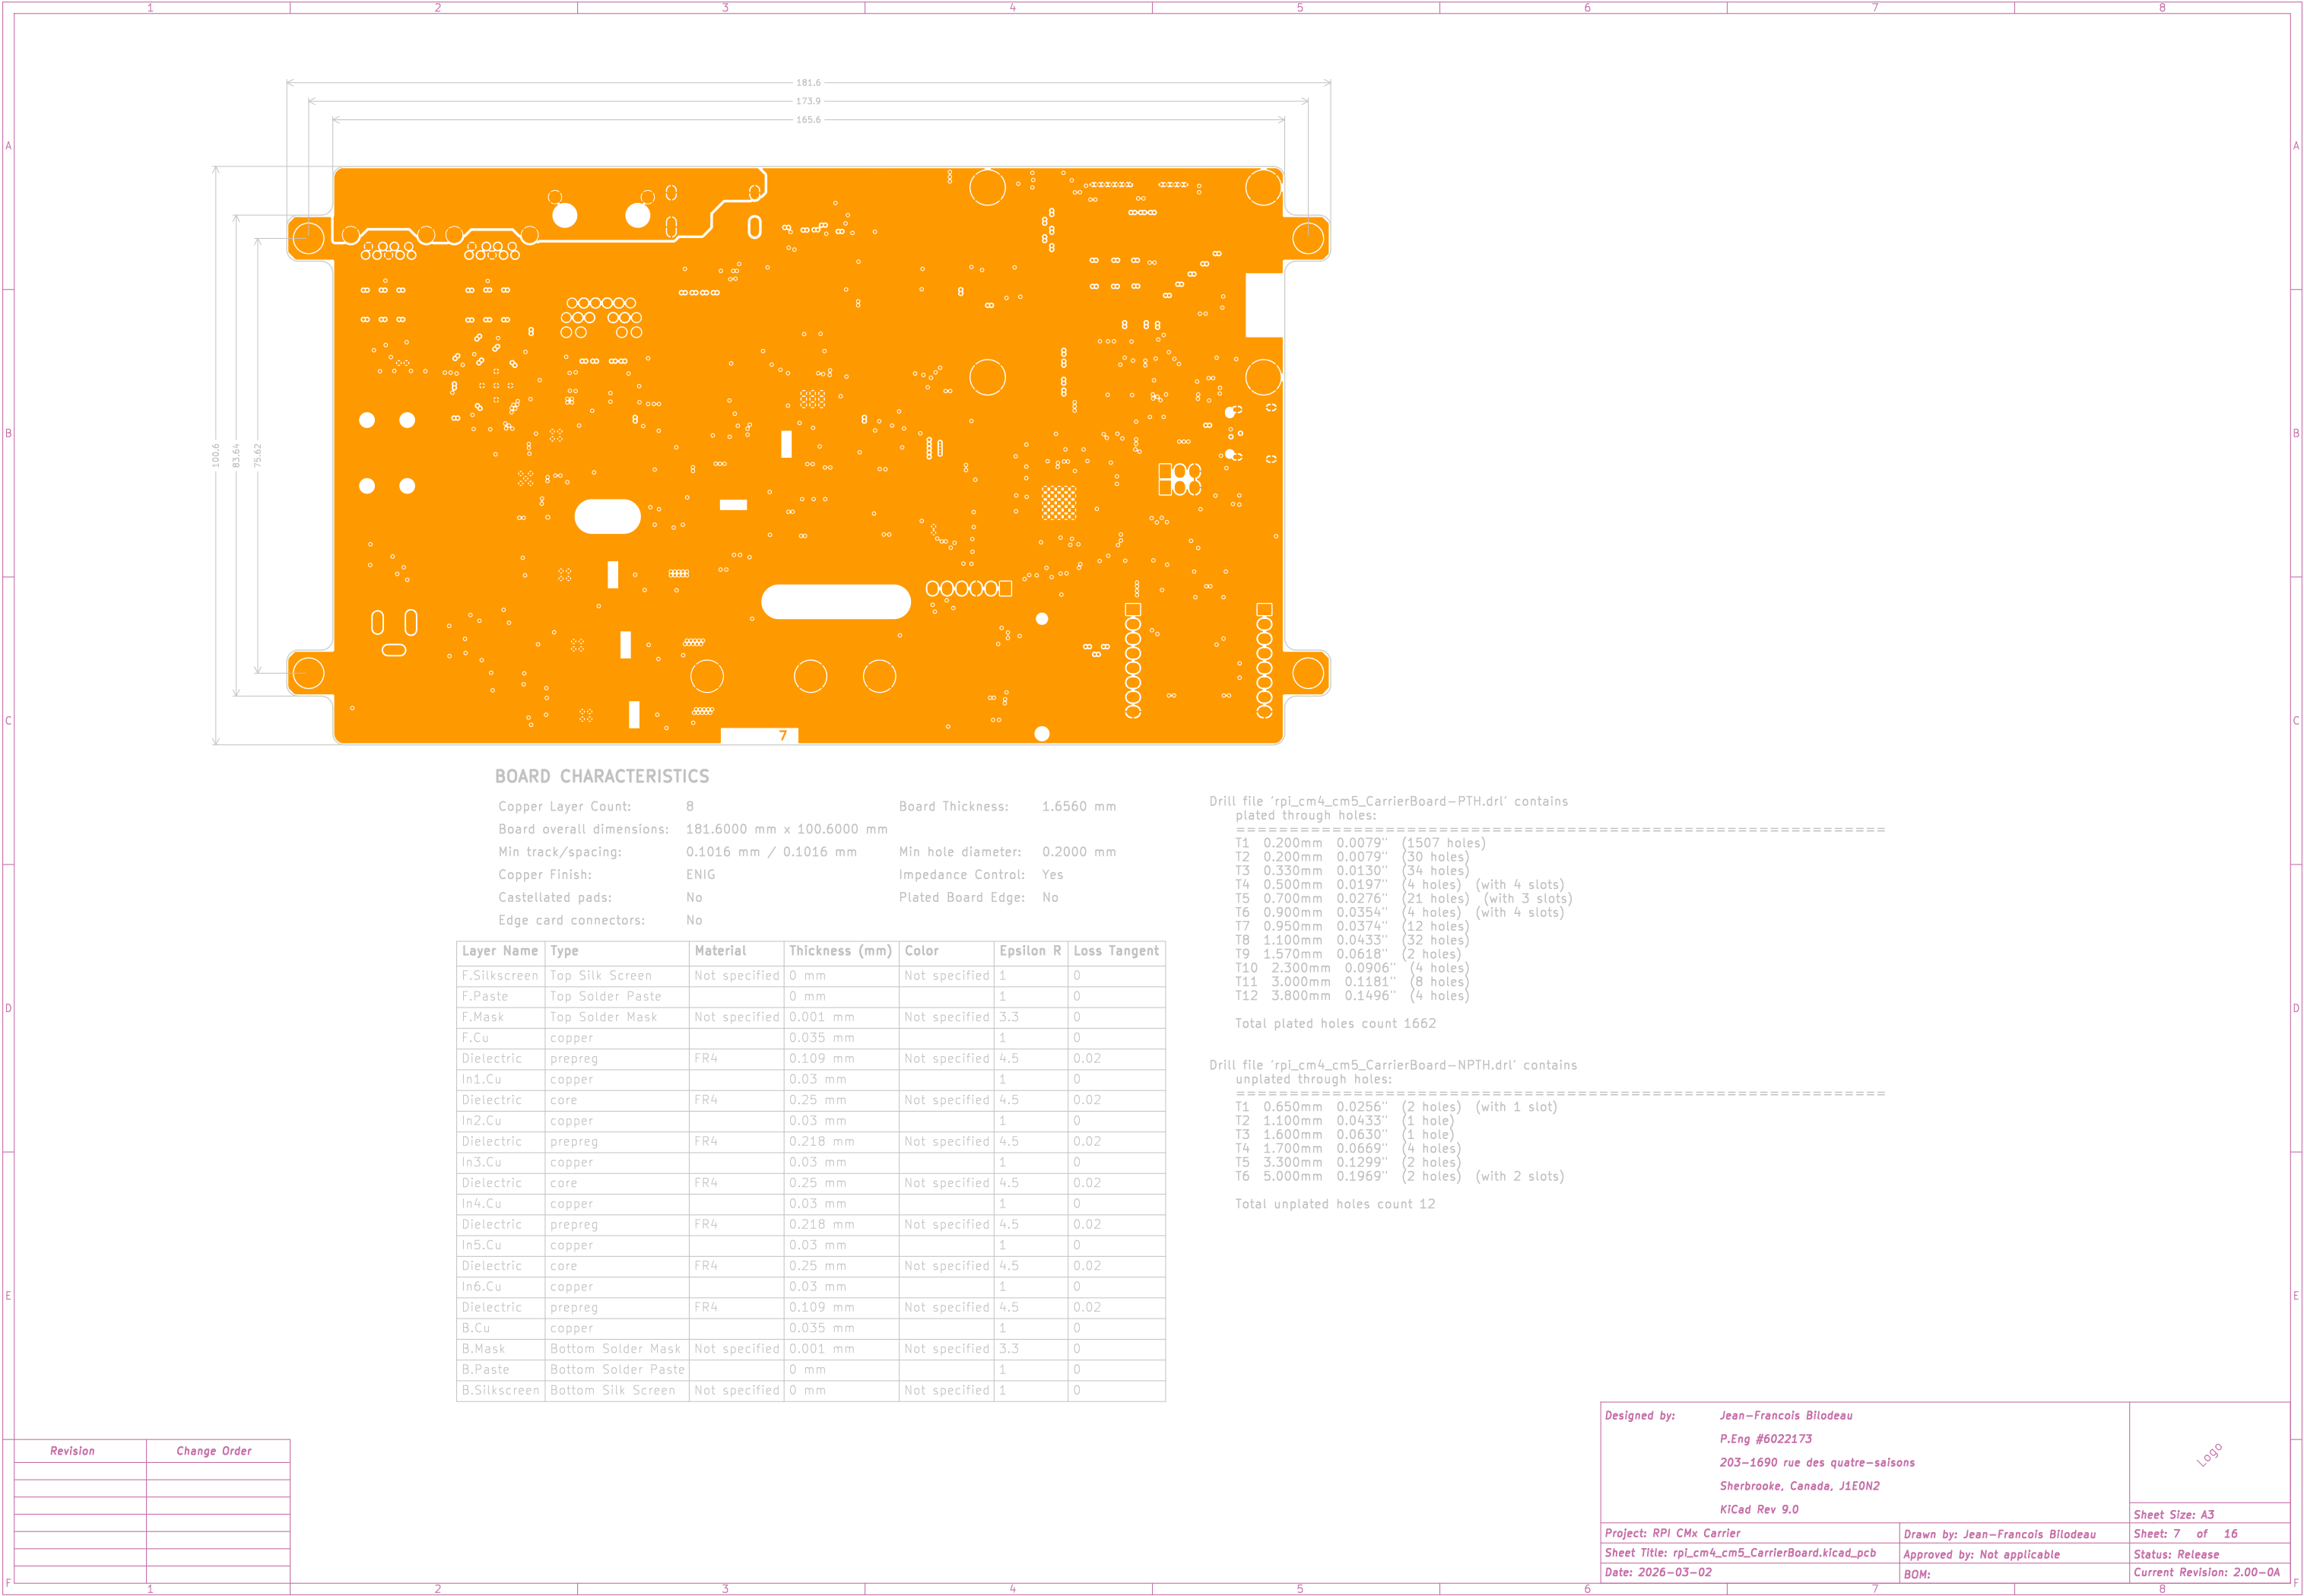

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1016 mm / 0.1016 mm	Min hole diameter:	0.2000 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KiCad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 7 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A

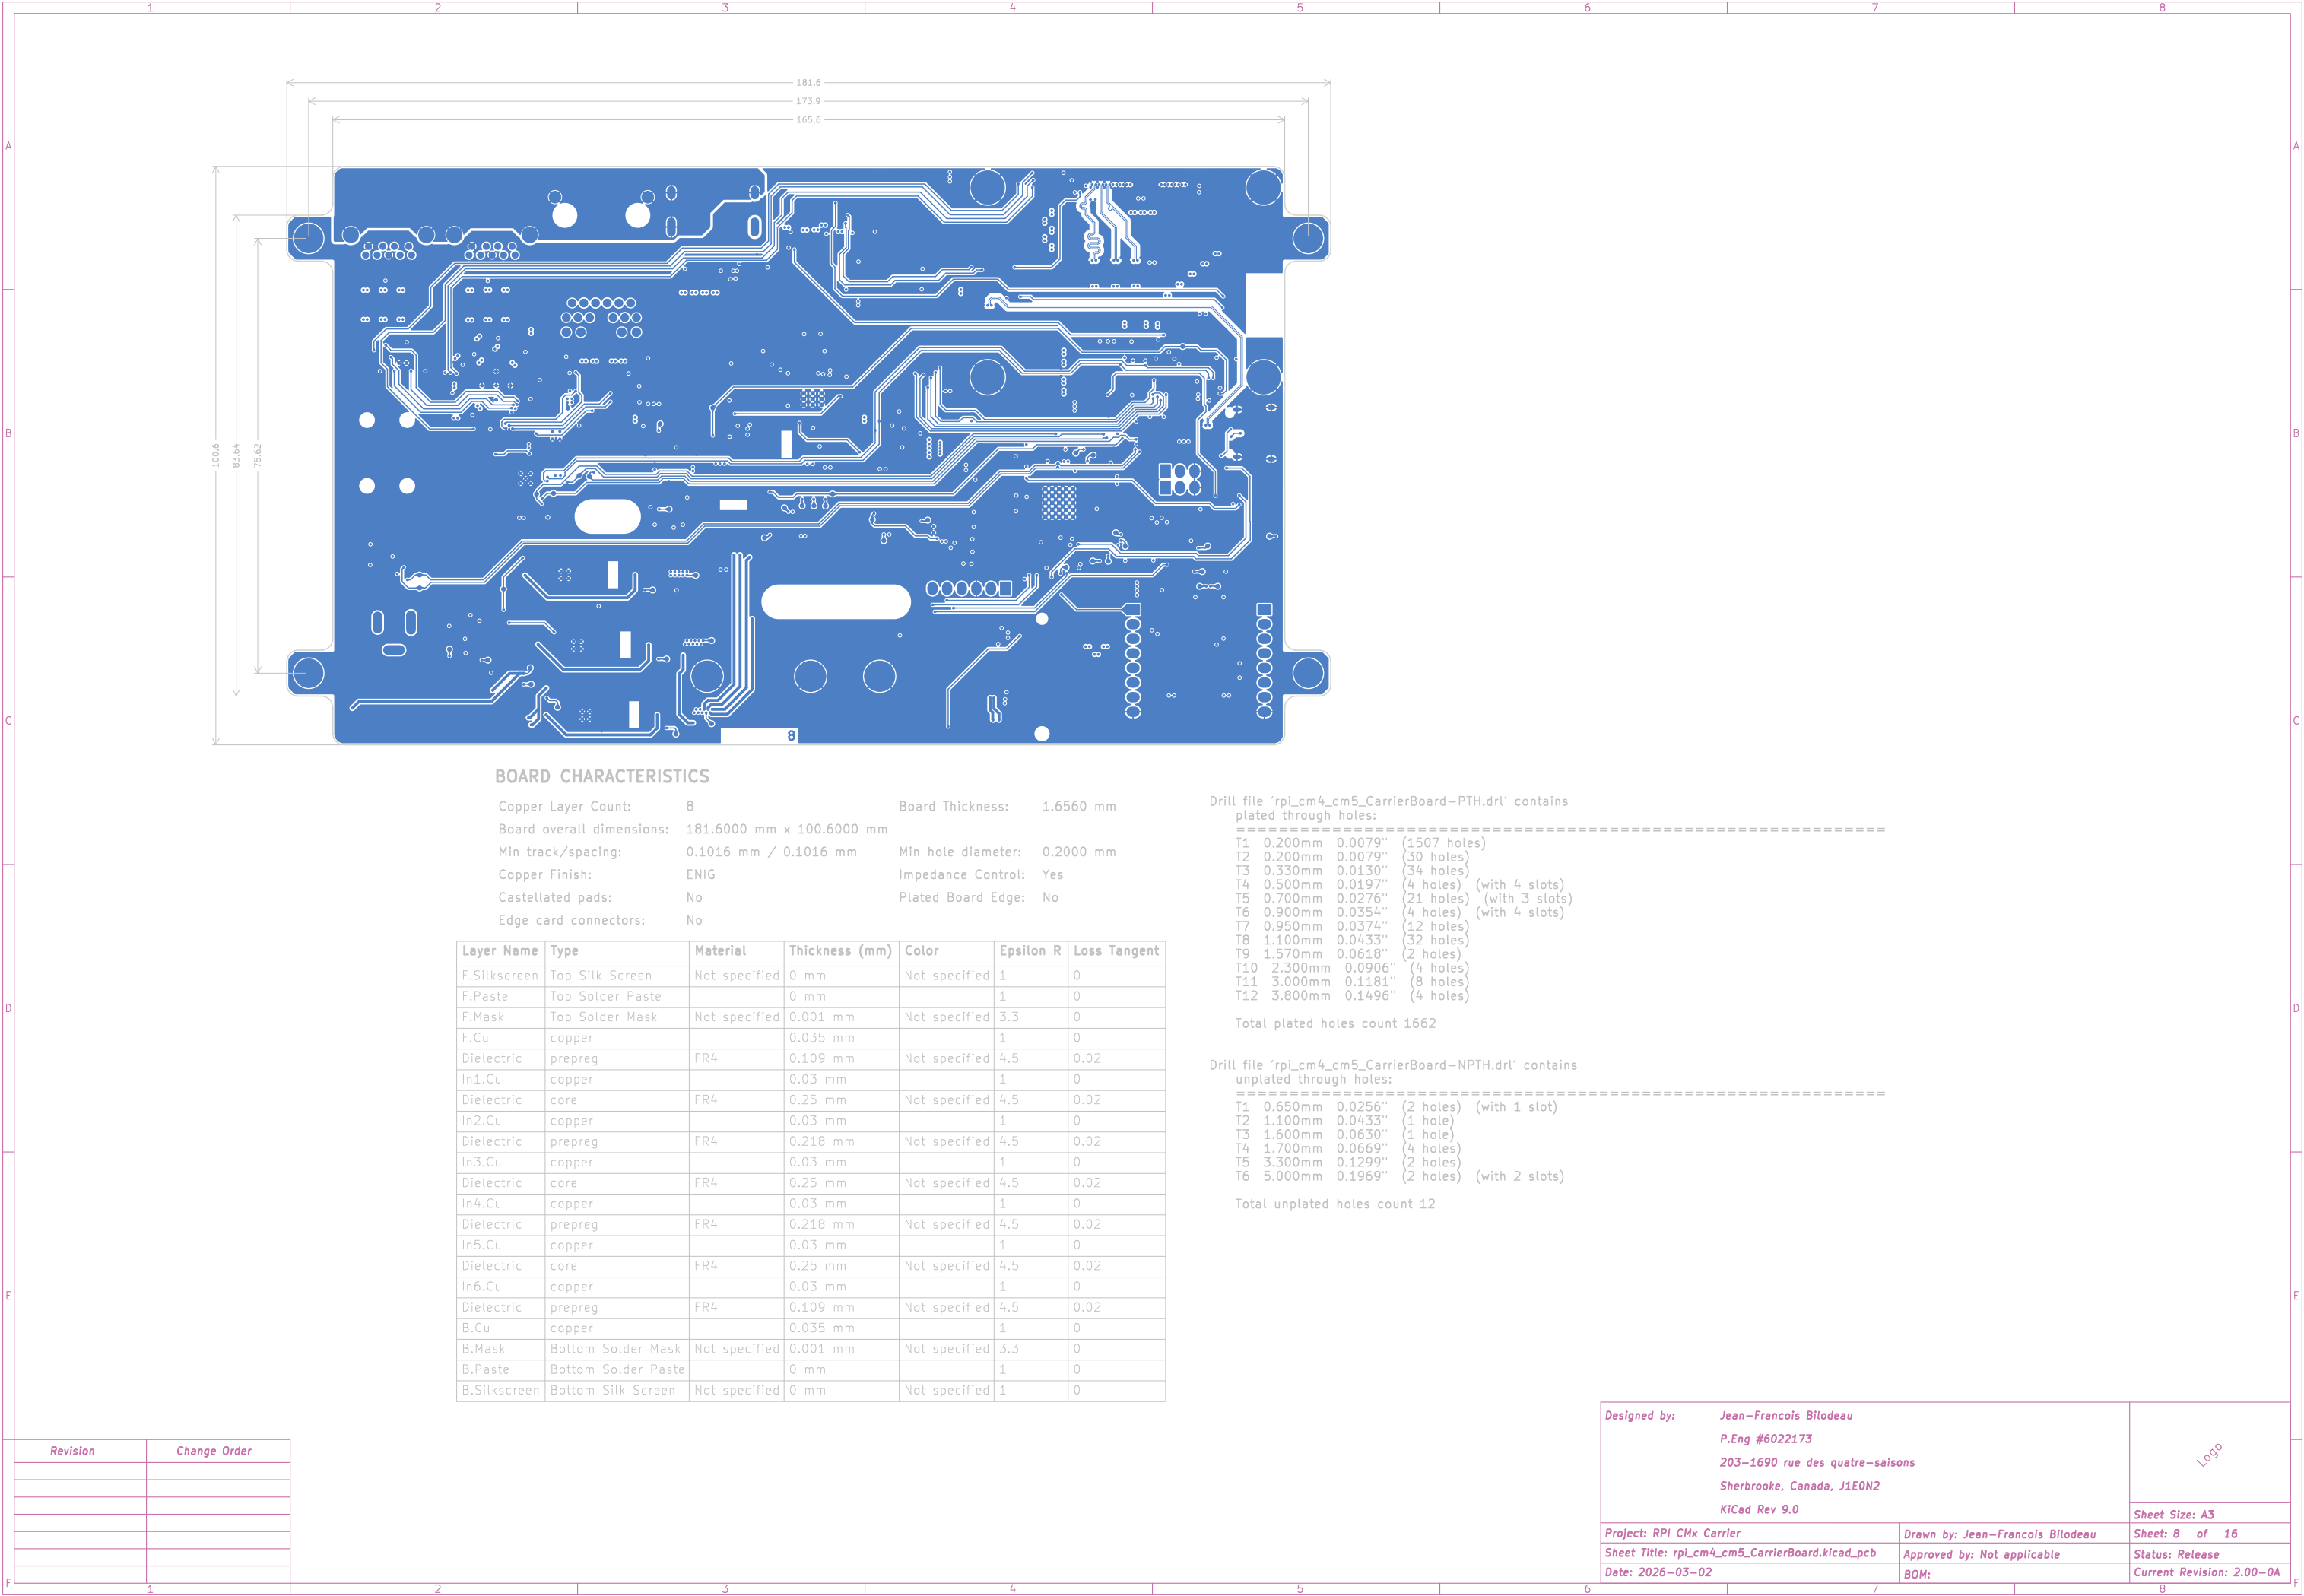

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo
Project: RPI CMx Carrier		Sheet Size: A3
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb		Sheet: 8 of 16
Approved by: Not applicable		Status: Release
Date: 2026-03-02	BOM:	Current Revision: 2.00-0A
	7	8

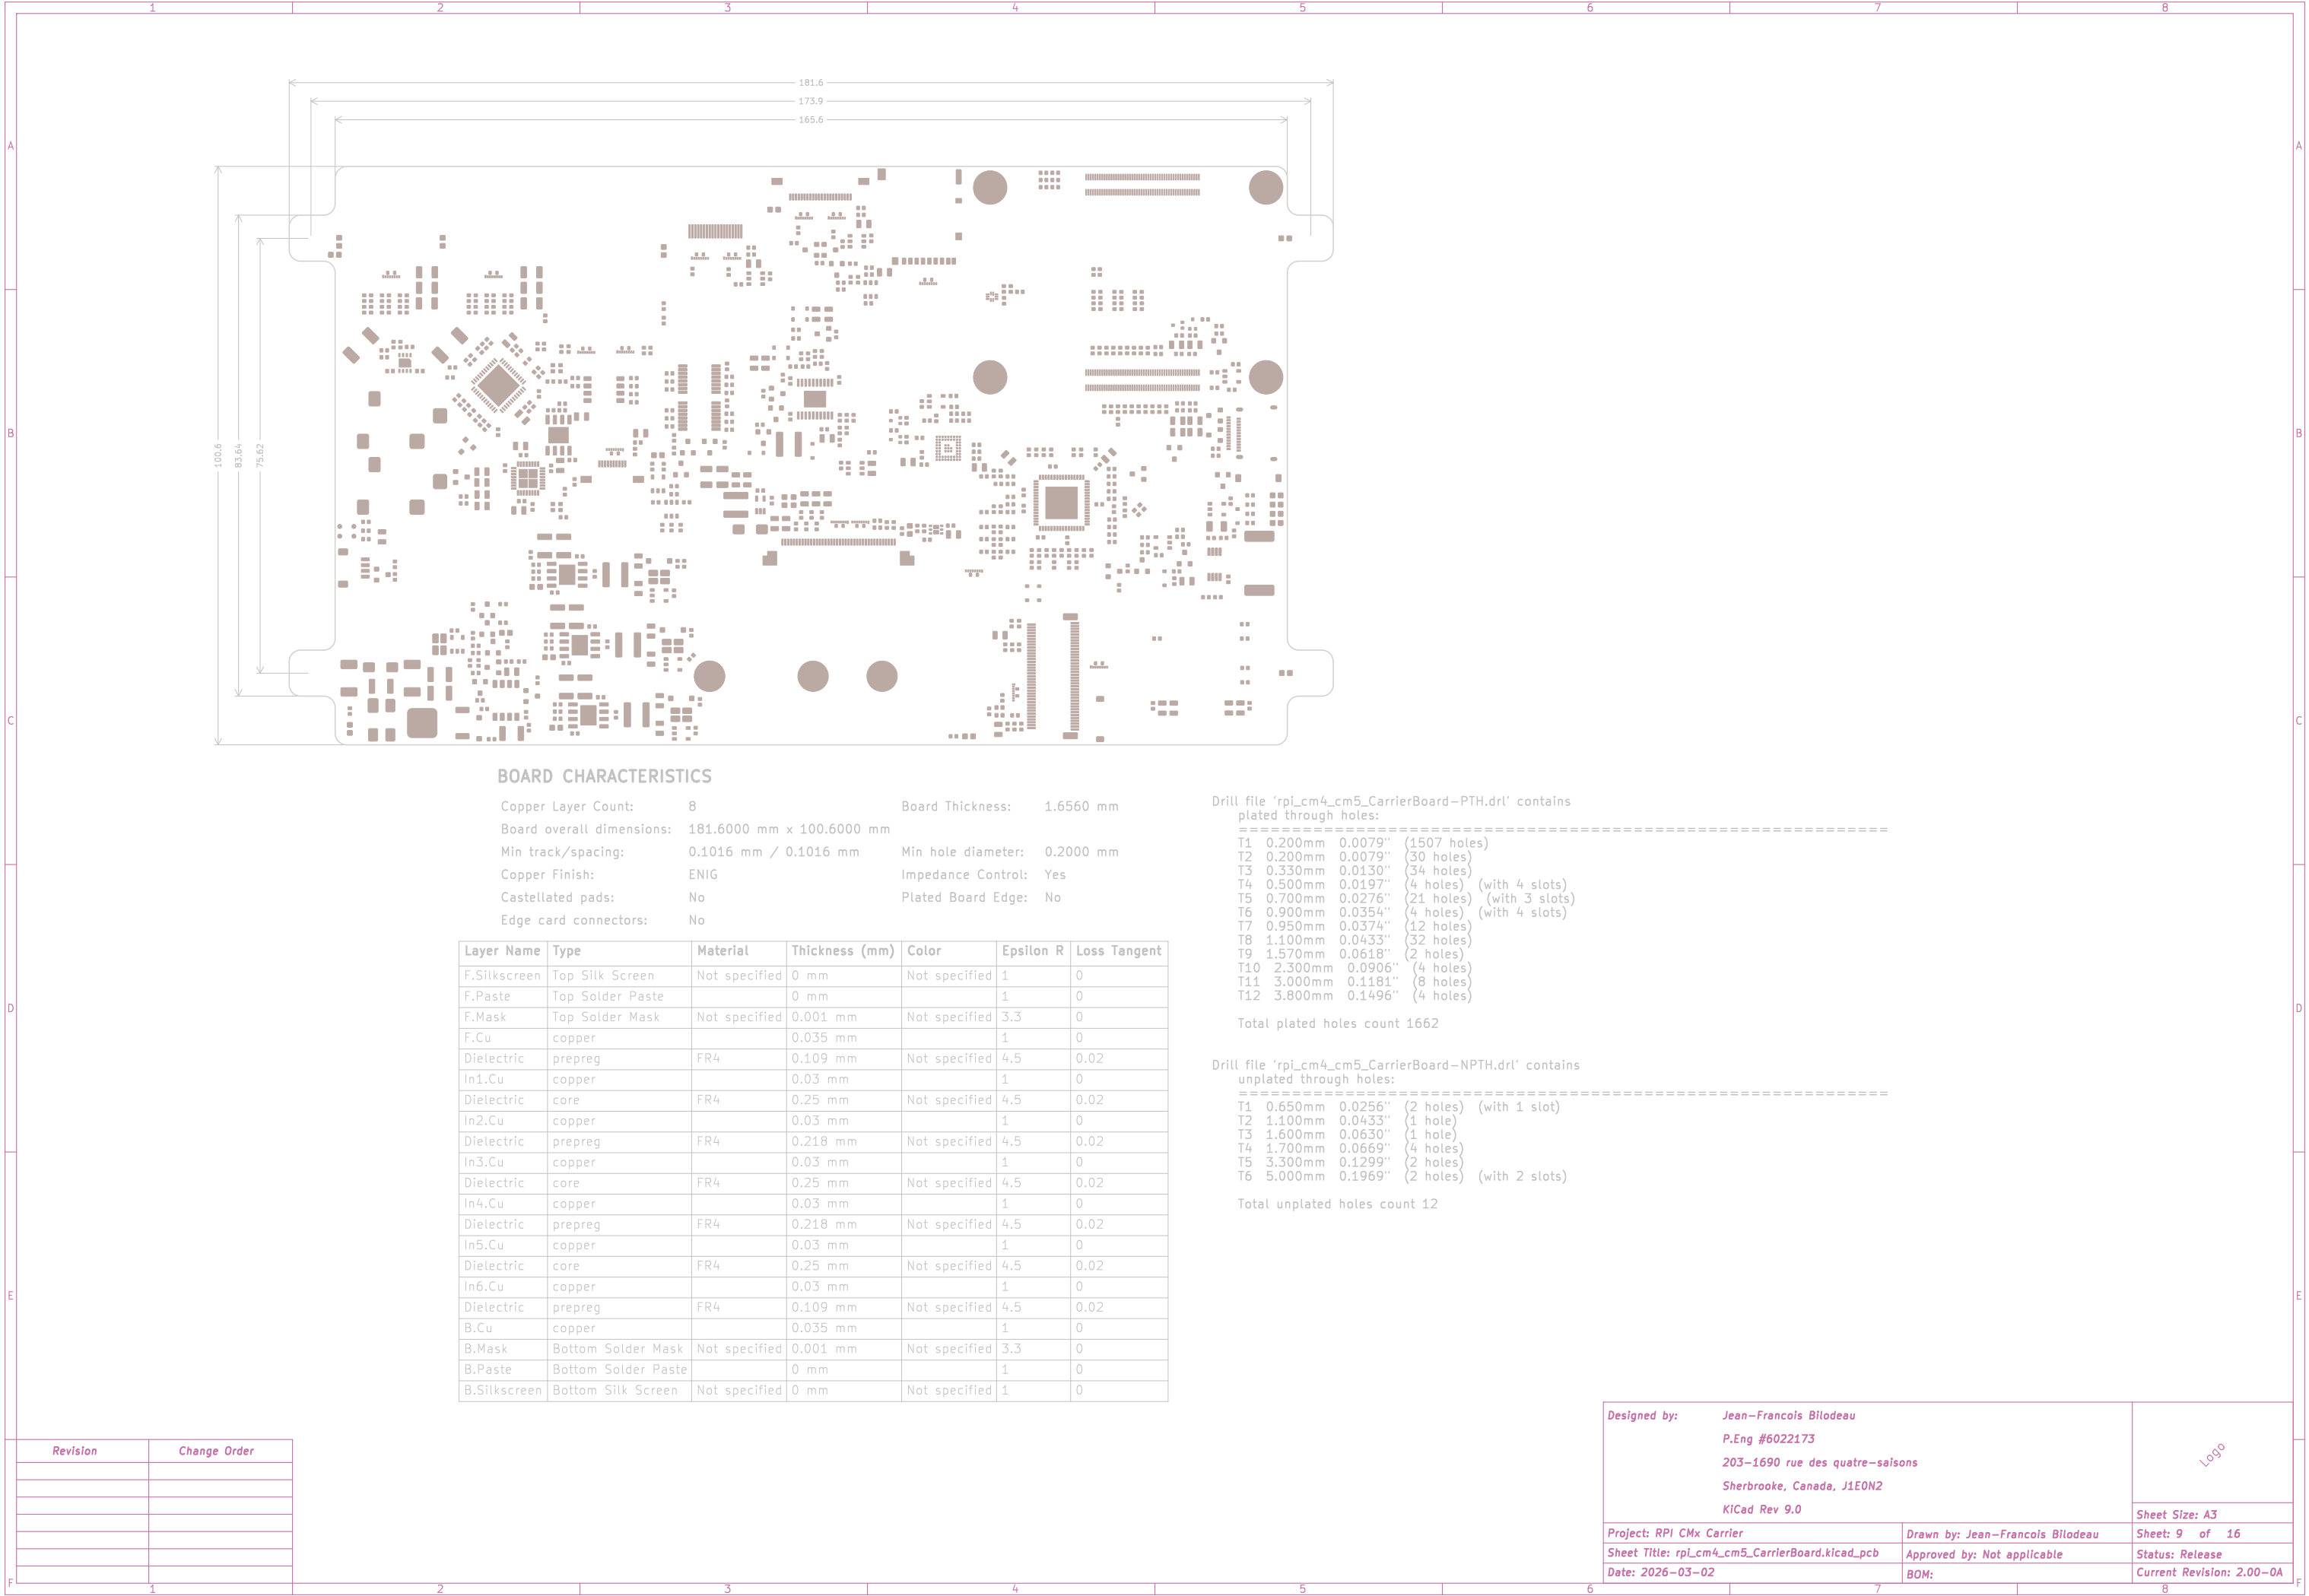

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4,5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4,5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4,5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4,5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4,5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4,5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4,5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3,3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard--PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard--NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12


Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 9 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A

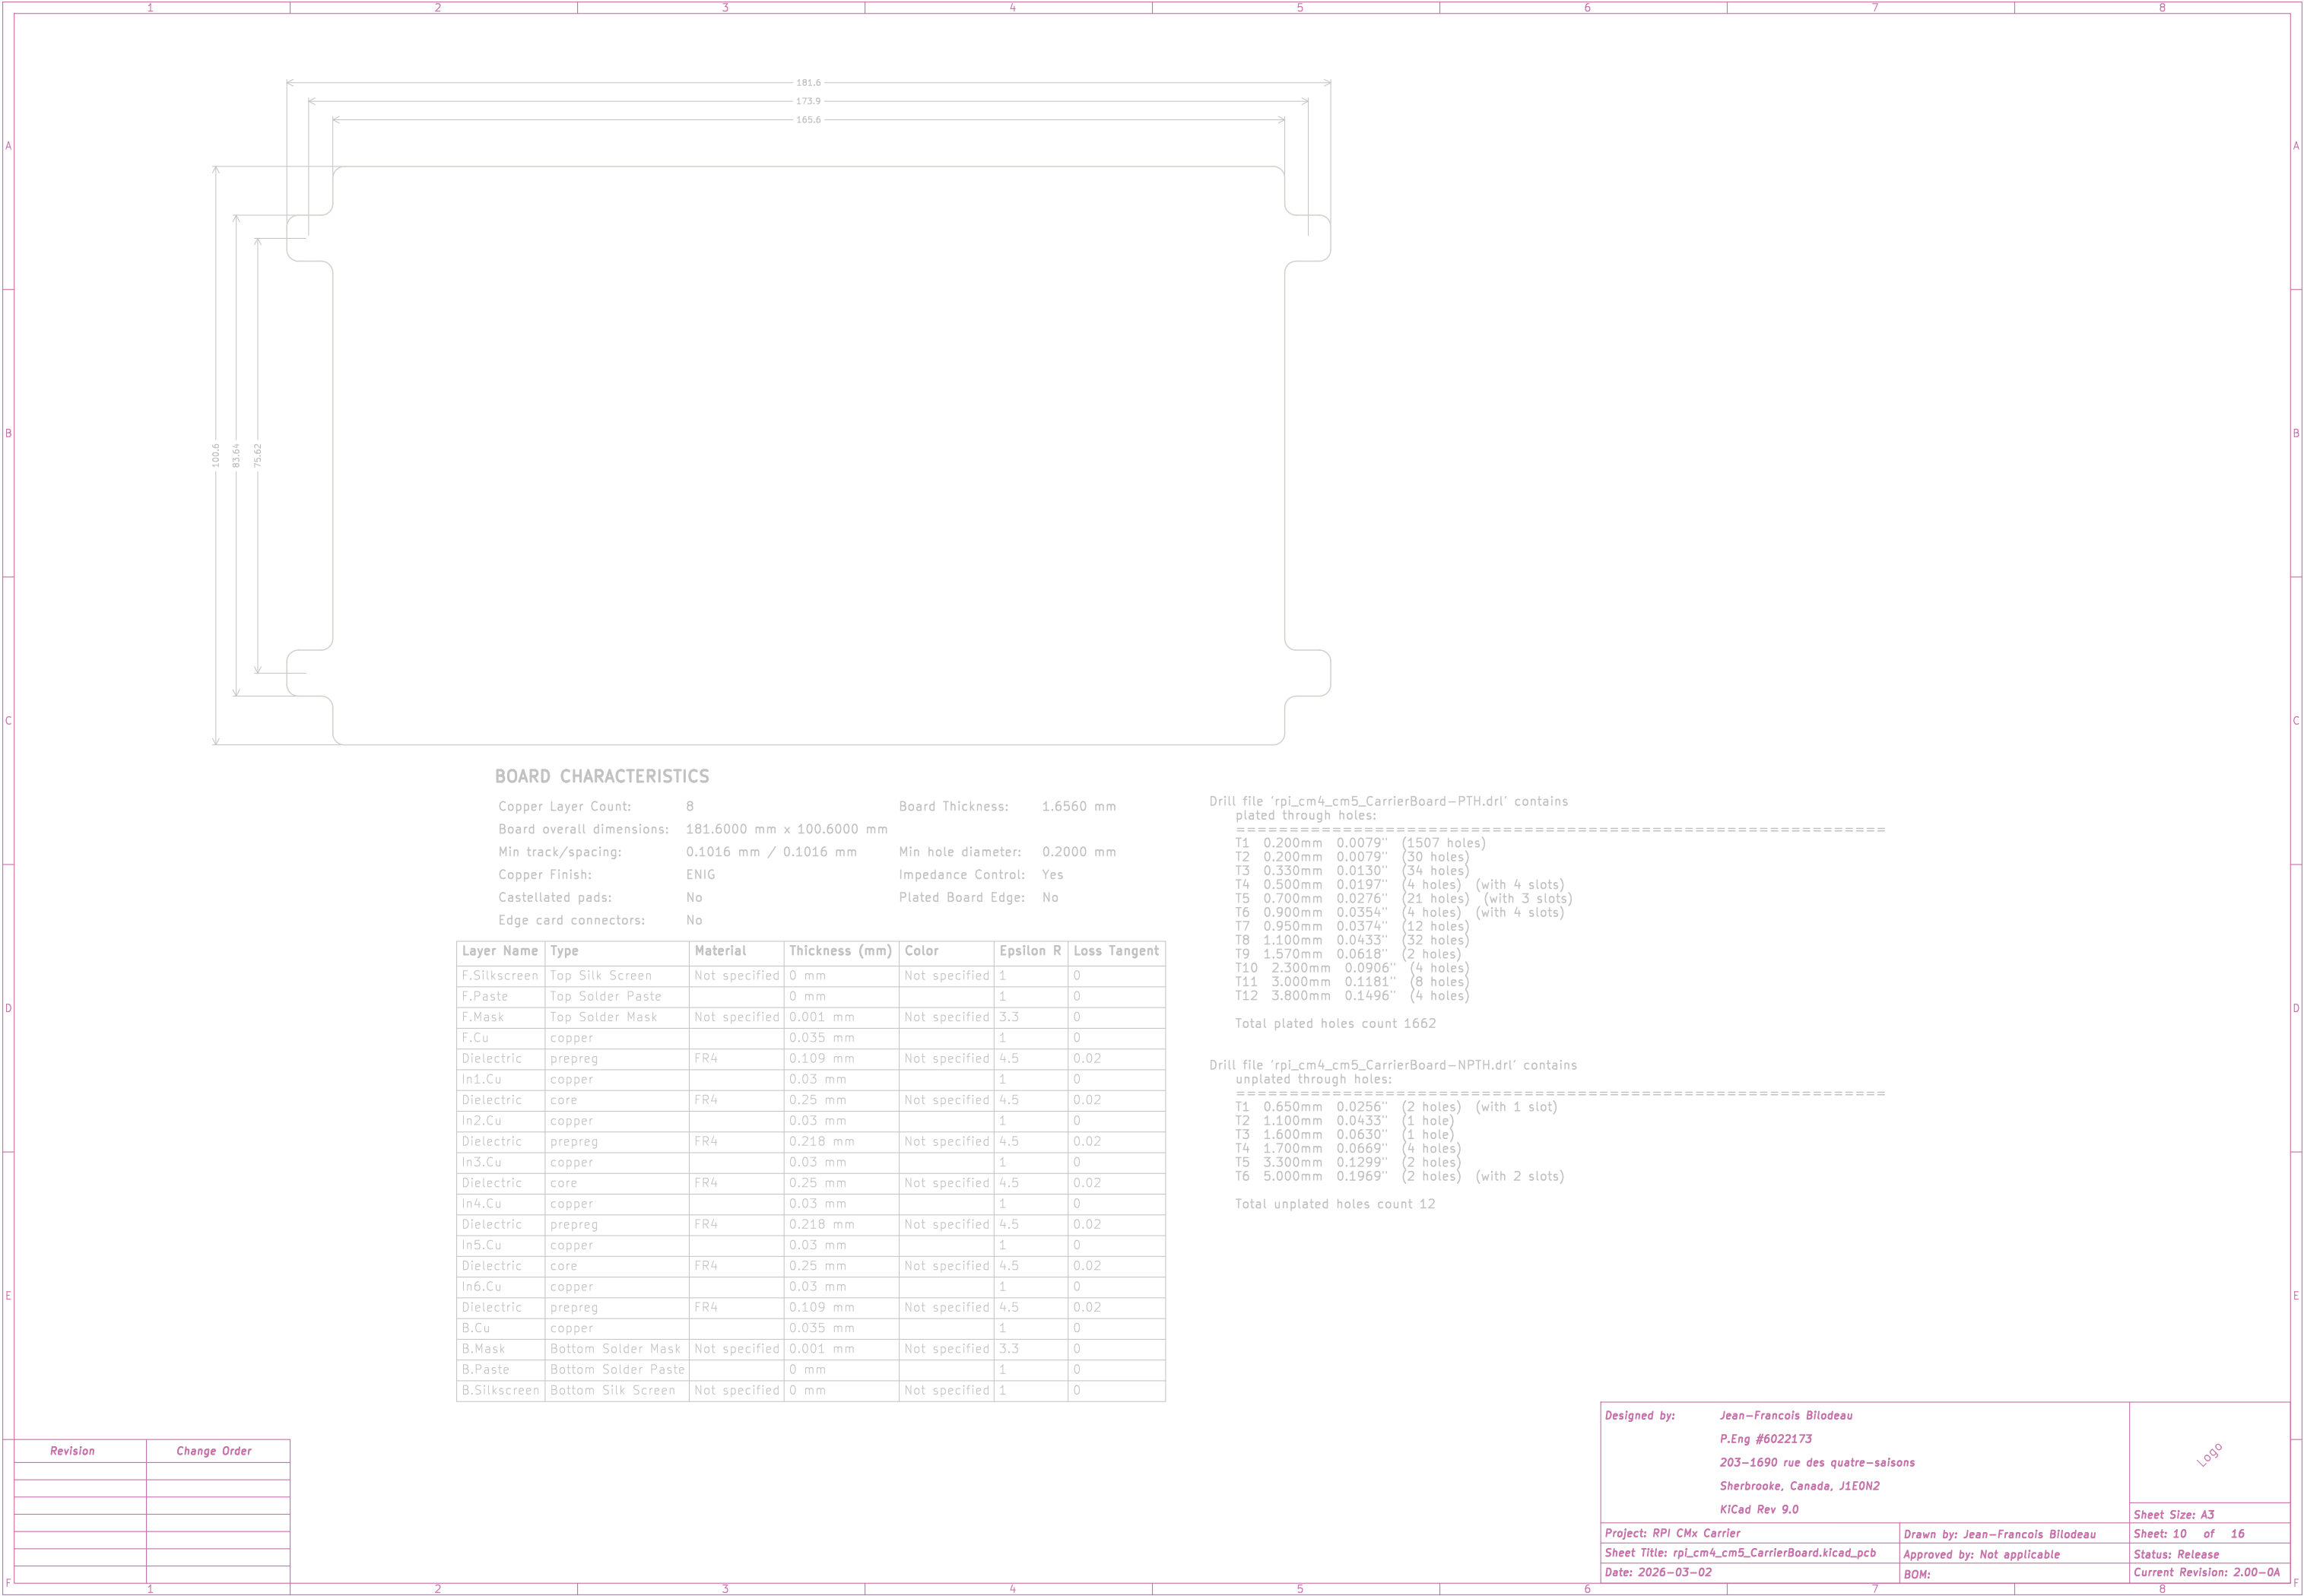

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 10 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A

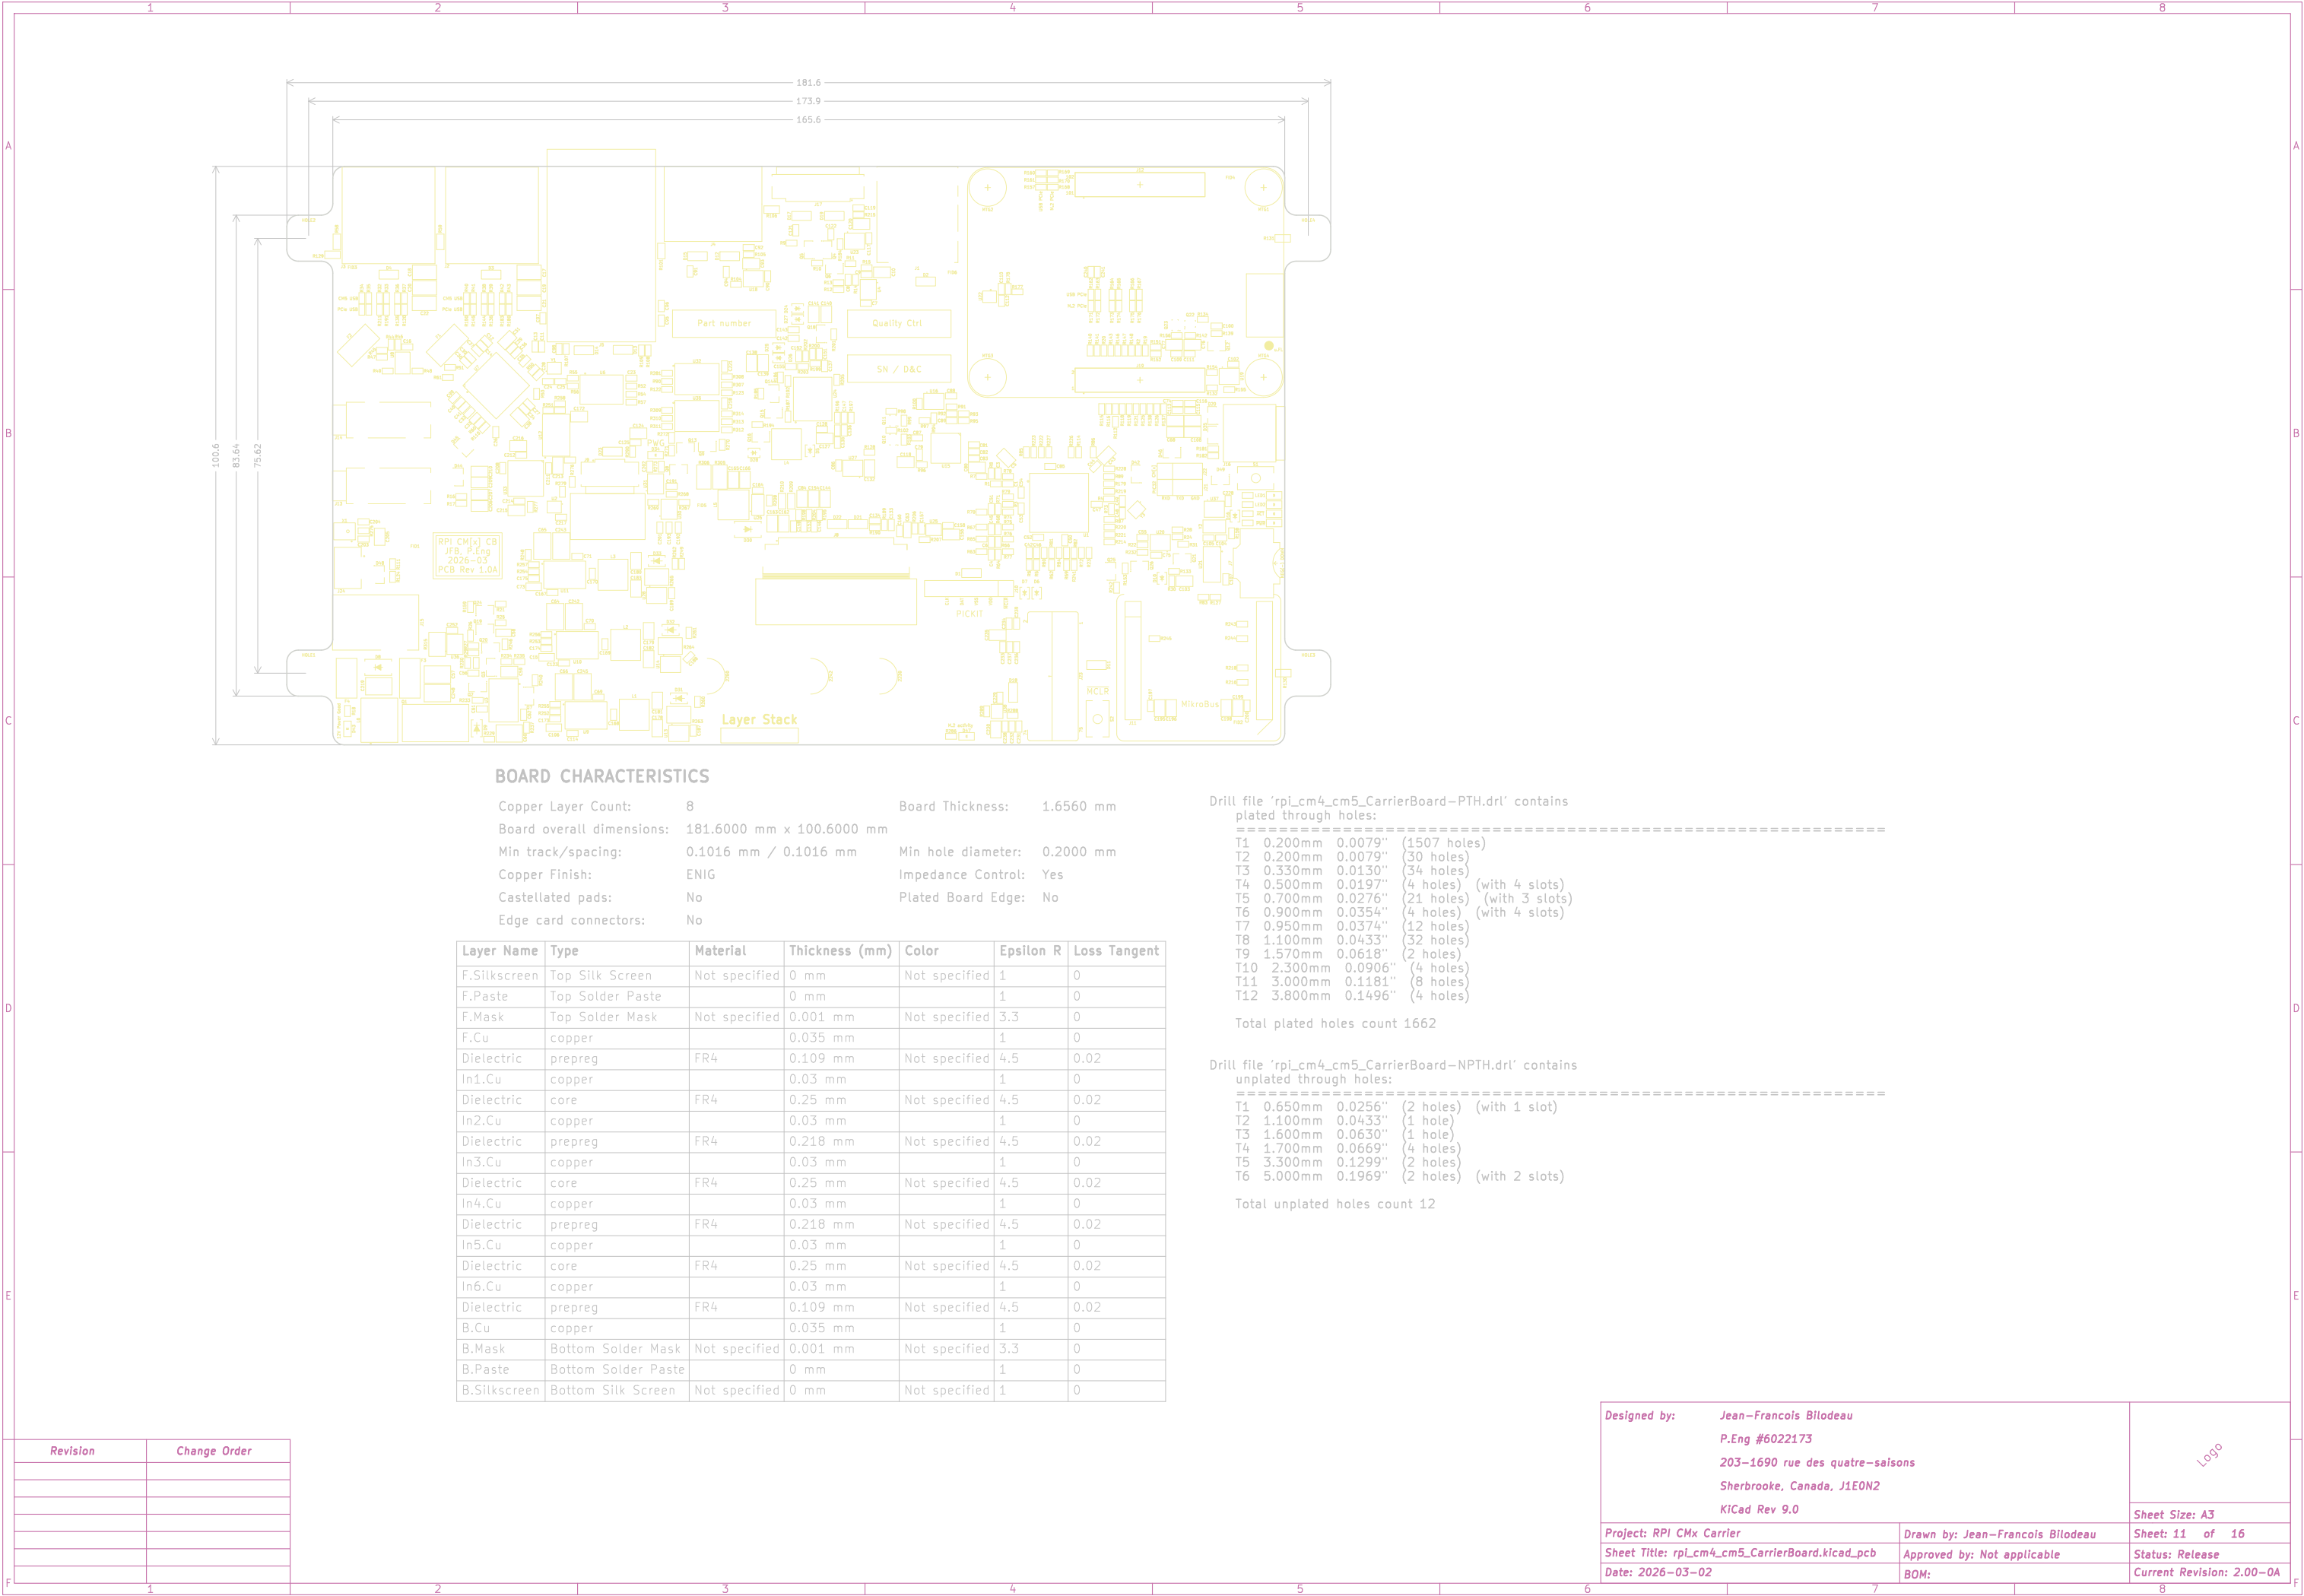

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo
Project: RPI CMx Carrier		Sheet Size: A3
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Drawn by: Jean-Francois Bilodeau	Sheet: 11 of 16
Date: 2026-03-02	Approved by: Not applicable	Status: Release
	BOM:	Current Revision: 2.00-0A
	7	8




Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

Total plated holes count 1662

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

Total unplated holes count 12

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		
Project: RPI CMx Carrier Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb Date: 2026-03-02		
Drawn by: Jean-Francois Bilodeau Approved by: Not applicable BOM:		Sheet: 12 of 16 Status: Release Current Revision: 2.00-0A

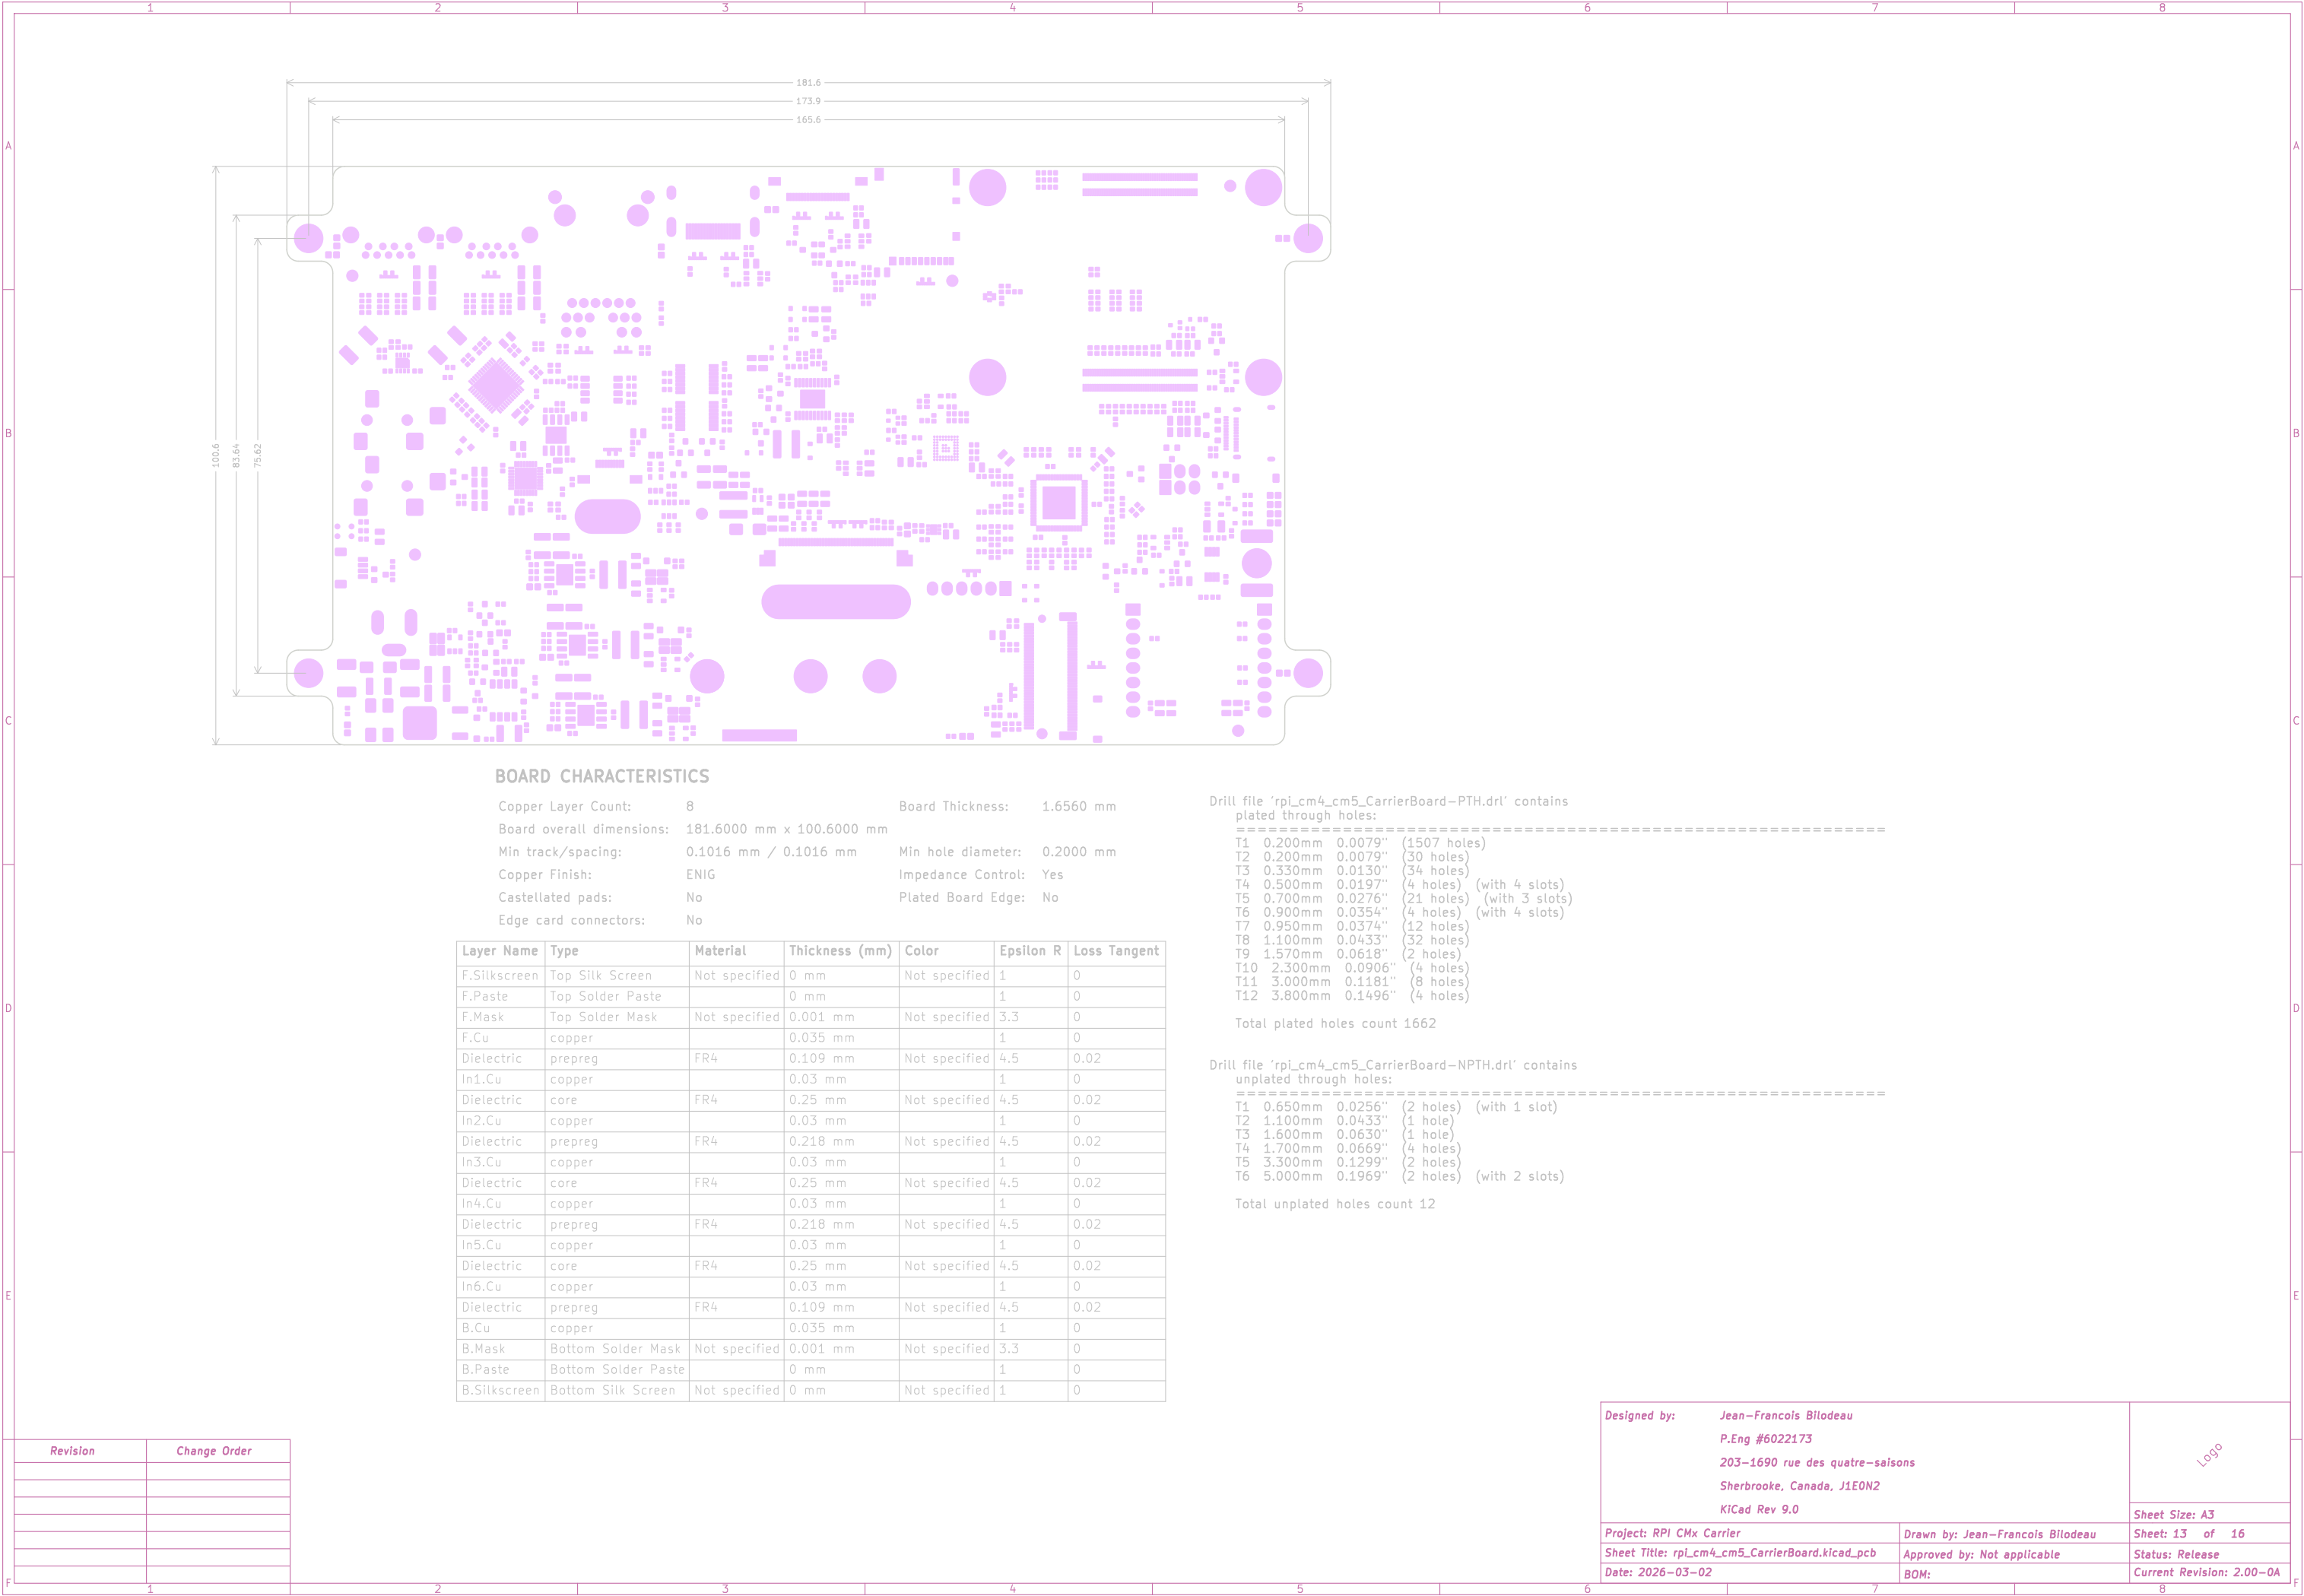

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard--PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard--NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo
Project: RPI CMx Carrier		Sheet Size: A3
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Drawn by: Jean-Francois Bilodeau	Sheet: 13 of 16
Date: 2026-03-02	Approved by: Not applicable	Status: Release
	BOM:	Current Revision: 2.00-0A
	7	8

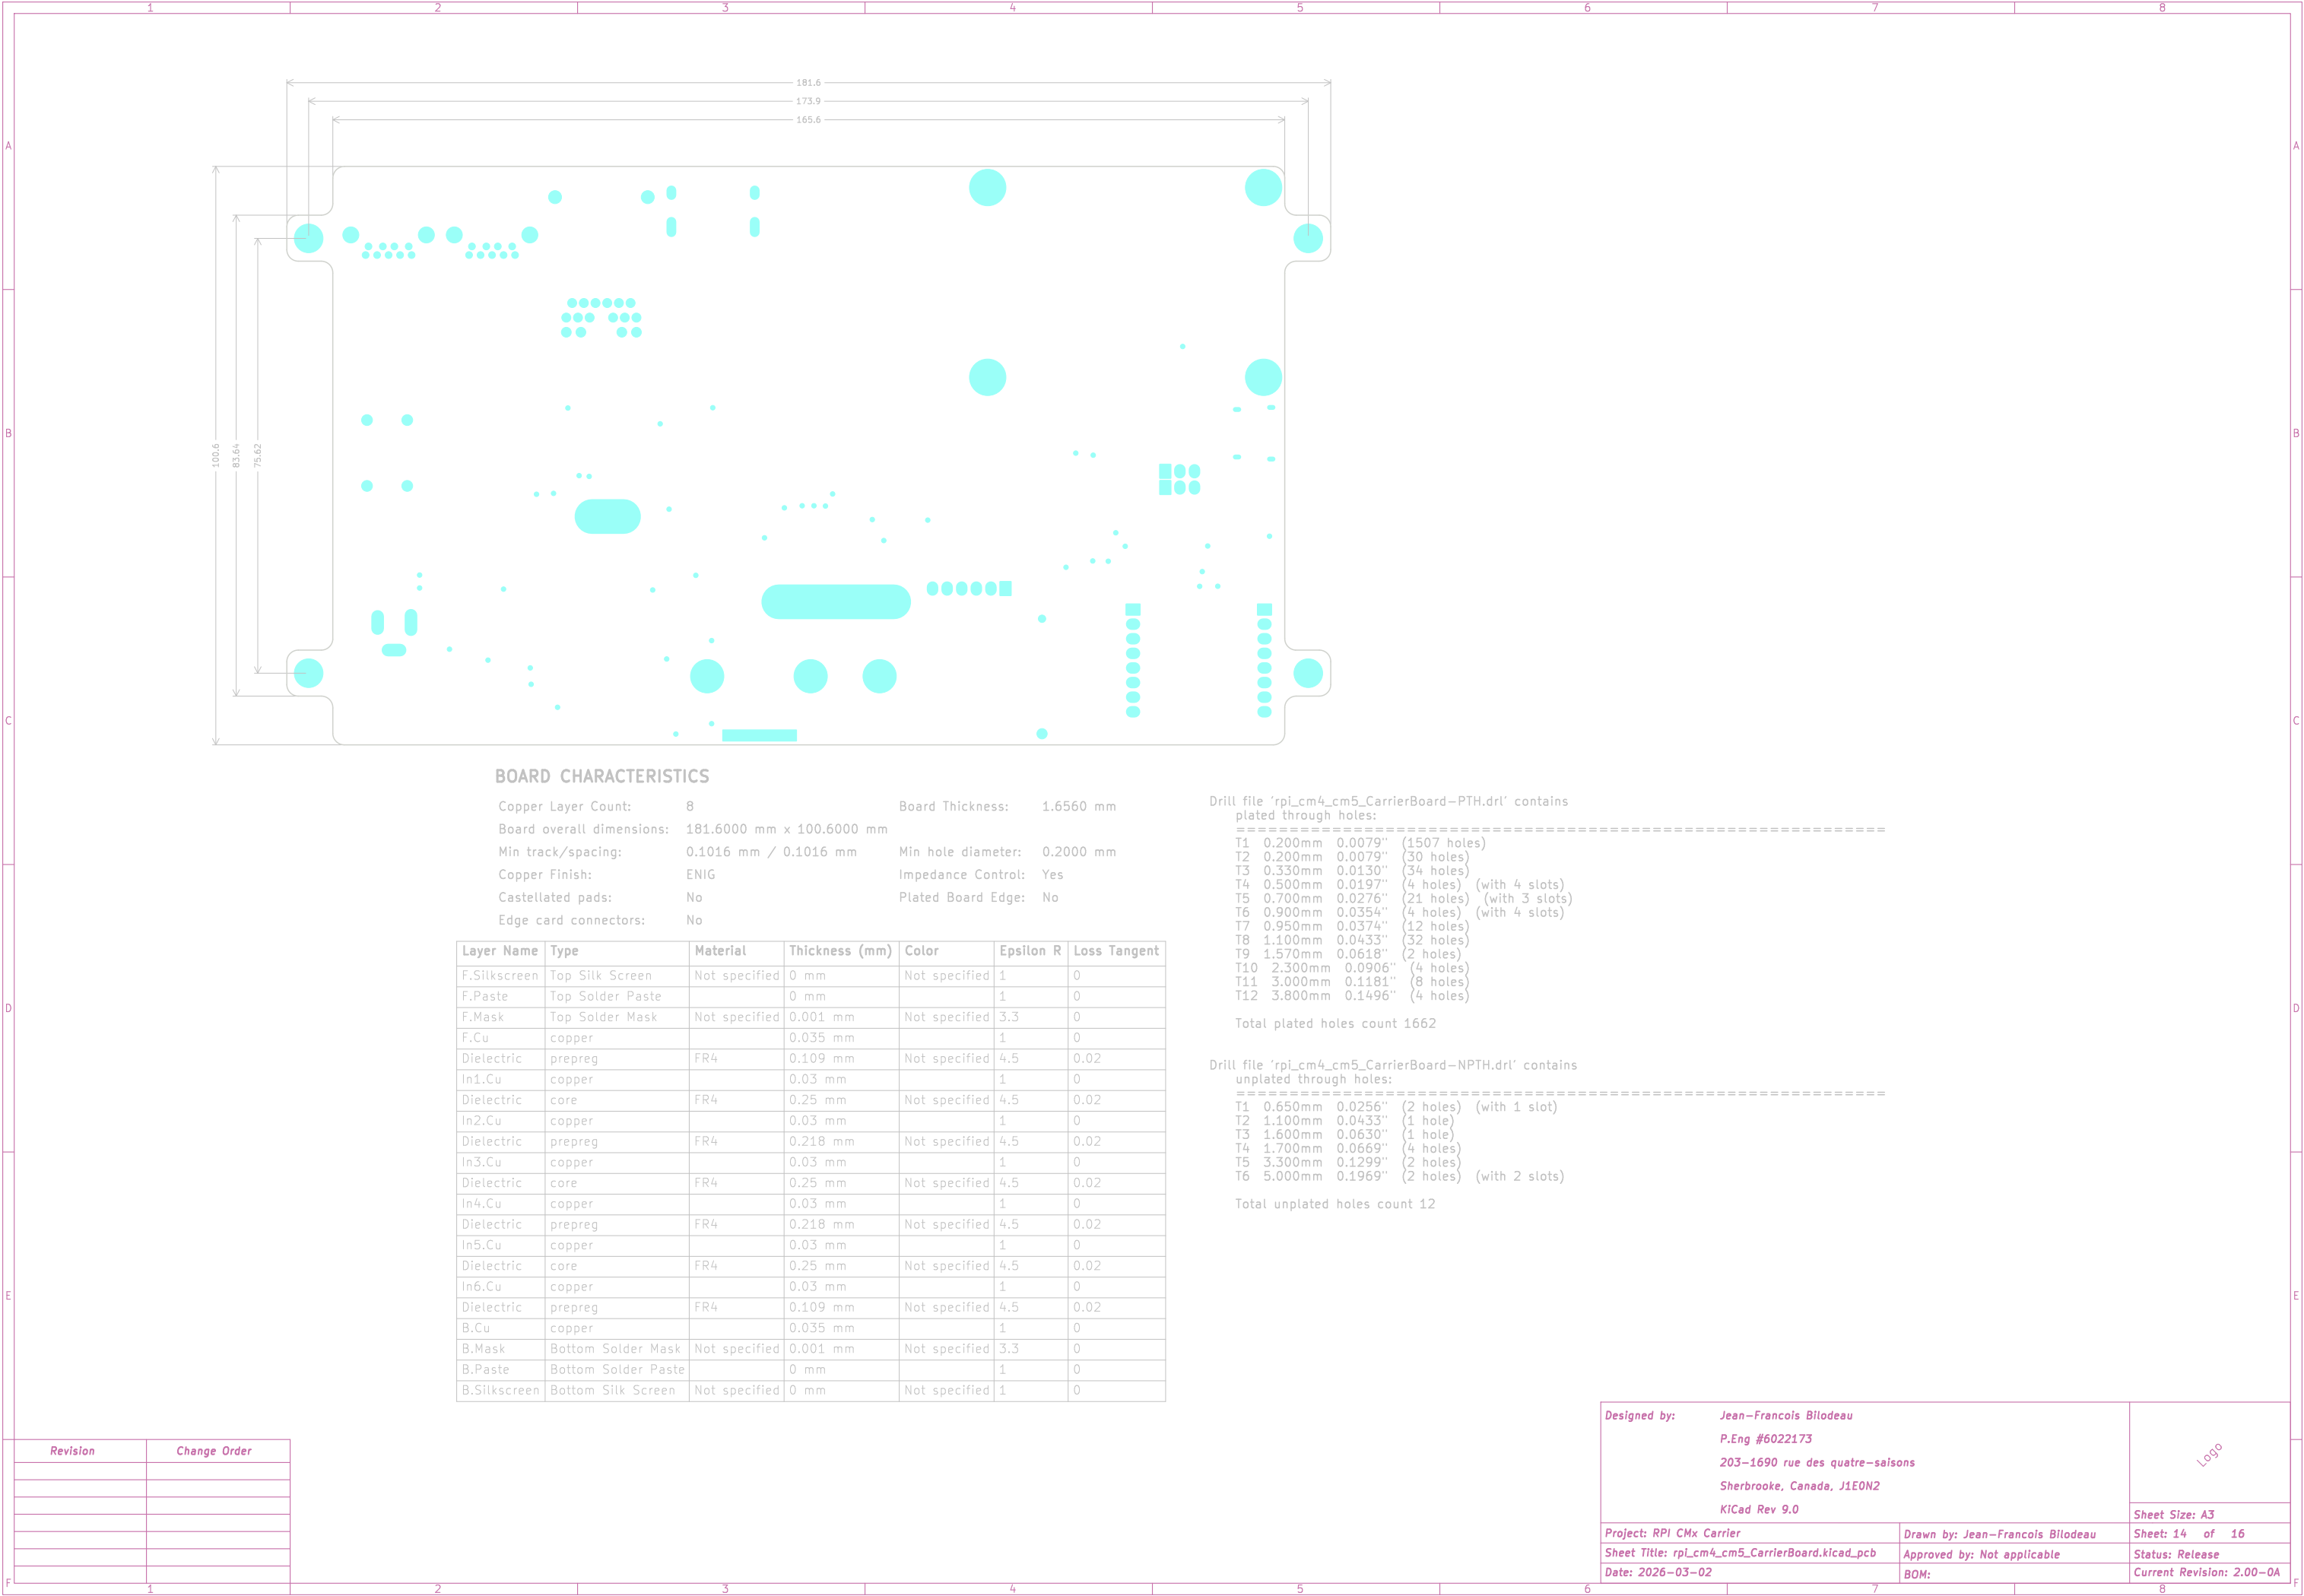

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm	Min hole diameter:	0.2000 mm
Min track/spacing:	0.1016 mm / 0.1016 mm	Impedance Control:	Yes
Copper Finish:	ENIG	Plated Board Edge:	No
Castellated pads:	No		
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard--PTH.drl' contains plated through holes:
=====

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)

Total plated holes count 1662


Drill file 'rpi_cm4_cm5_CarrierBoard--NPTH.drl' contains unplated through holes:
=====

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo
Project: RPI CMx Carrier		Sheet Size: A3
Drawn by: Jean-Francois Bilodeau		Sheet: 14 of 16
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb		Status: Release
Date: 2026-03-02		Current Revision: 2.00-0A
BOM:		

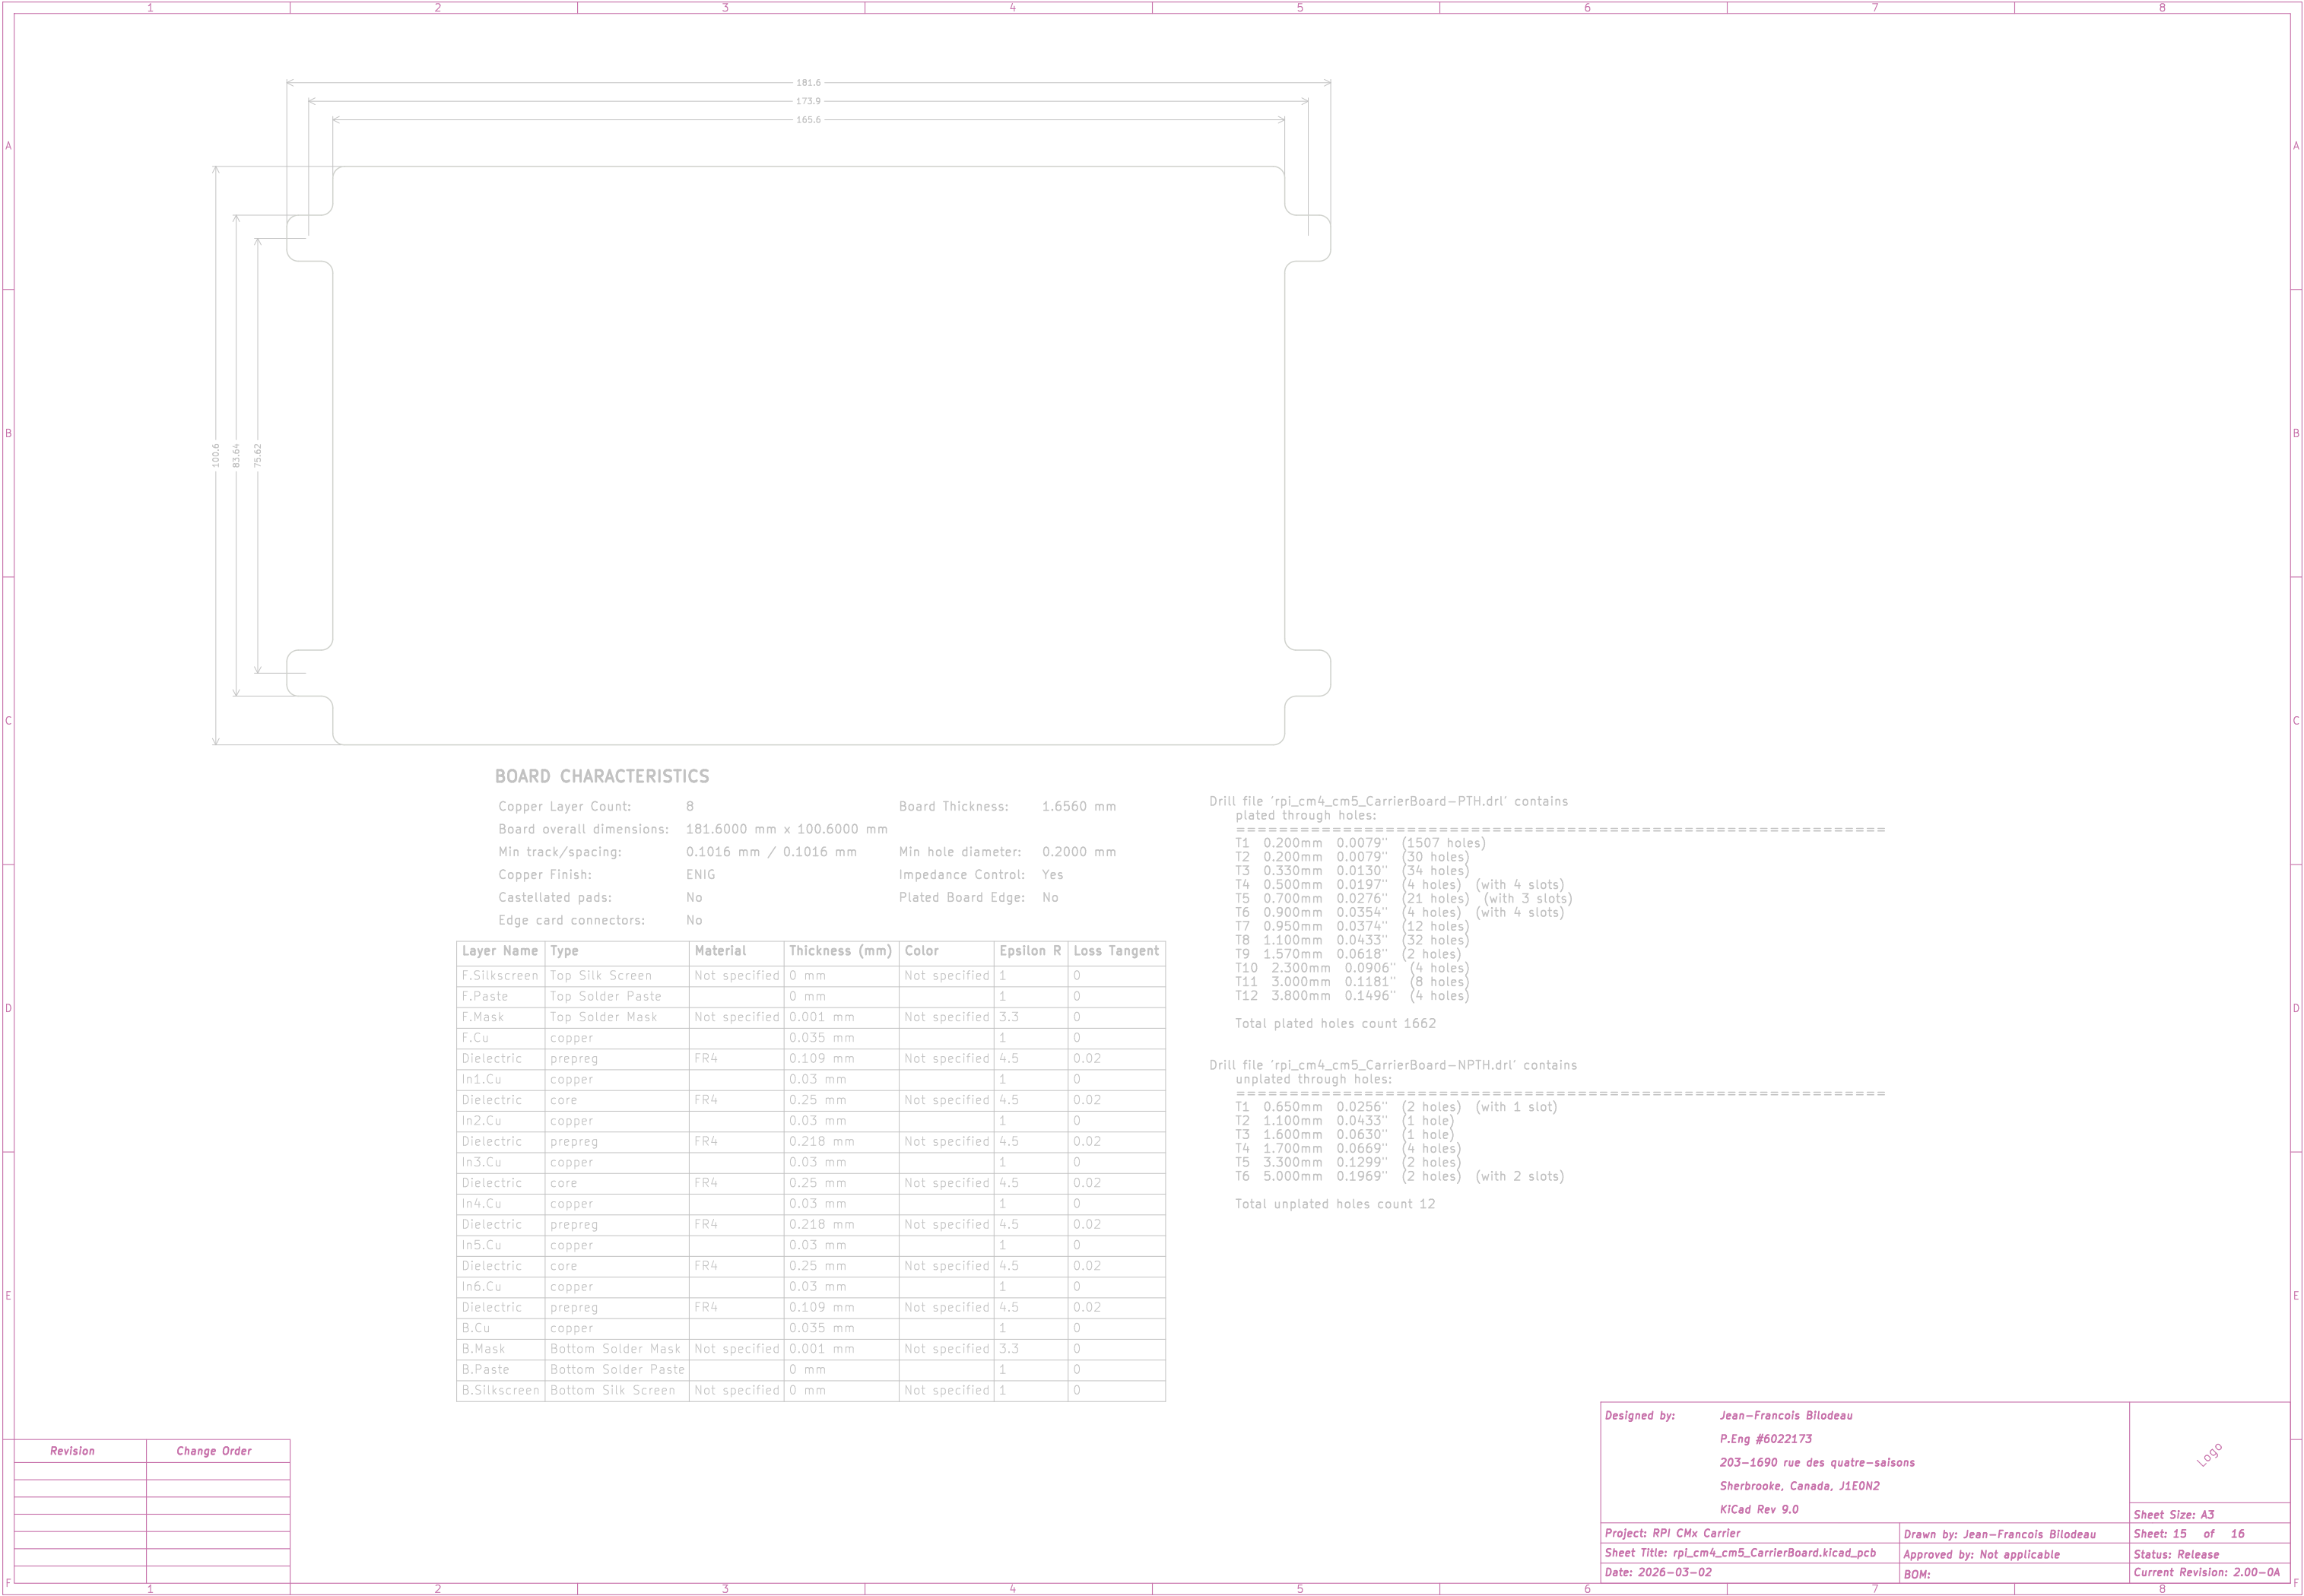

BOARD CHARACTERISTICS

Copper Layer Count: 8 Board Thickness: 1.6560 mm
Board overall dimensions: 181.6000 mm x 100.6000 mm
Min track/spacing: 0.1016 mm / 0.1016 mm Min hole diameter: 0.2000 mm
Copper Finish: ENIG Impedance Control: Yes
Castellated pads: No Plated Board Edge: No
Edge card connectors: No

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:
=====

T1	0.200mm	0.0079"	(1507 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.900mm	0.0354"	(4 holes) (with 4 slots)
T7	0.950mm	0.0374"	(12 holes)
T8	1.100mm	0.0433"	(32 holes)
T9	1.570mm	0.0618"	(2 holes)
T10	2.300mm	0.0906"	(4 holes)
T11	3.000mm	0.1181"	(8 holes)
T12	3.800mm	0.1496"	(4 holes)


Total plated holes count 1662

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:
=====

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	Sheet Size: A3
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 15 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A

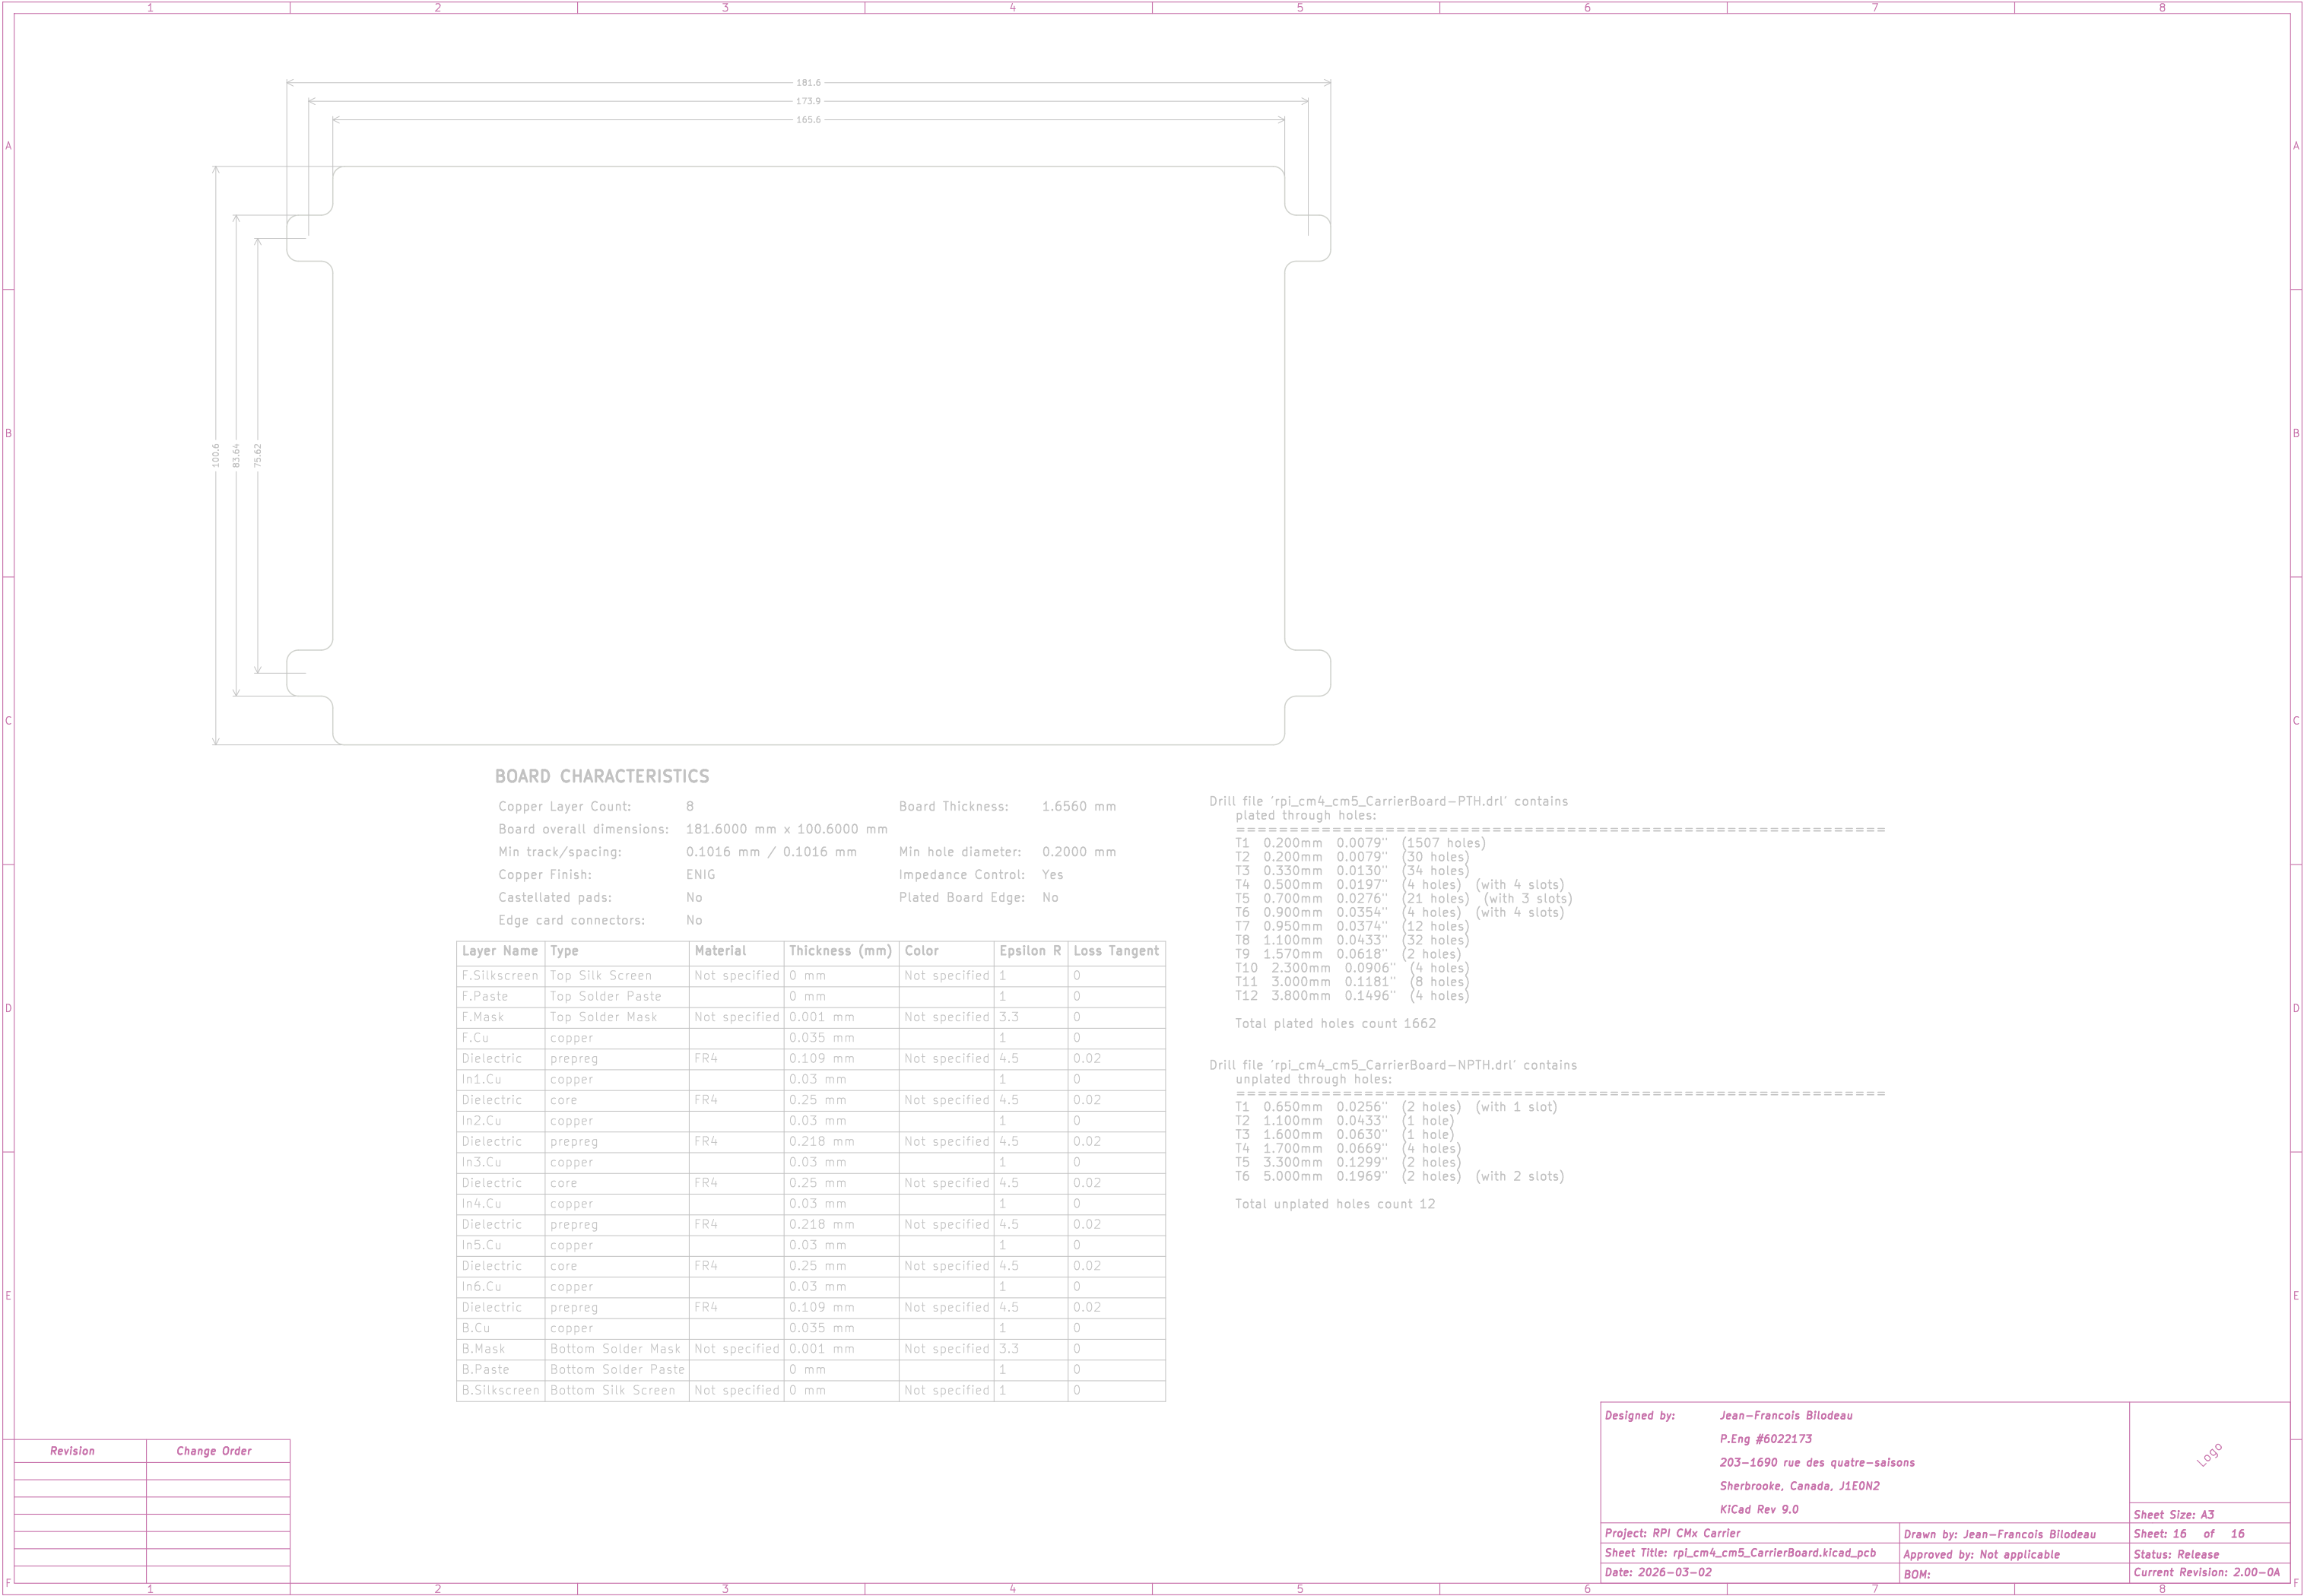

BOARD CHARACTERISTICS

Copper Layer Count: 8 Board Thickness: 1.6560 mm
Board overall dimensions: 181.6000 mm x 100.6000 mm
Min track/spacing: 0.1016 mm / 0.1016 mm Min hole diameter: 0.2000 mm
Copper Finish: ENIG Impedance Control: Yes
Castellated pads: No Plated Board Edge: No
Edge card connectors: No

Drill file 'rpi_cm4_cm5_CarrierBoard--PTH.drl' contains plated through holes:
=====

Drill	Size	Count	Notes
T1	0.200mm 0.0079"	1507	holes
T2	0.200mm 0.0079"	30	holes
T3	0.330mm 0.0130"	34	holes
T4	0.500mm 0.0197"	4	holes (with 4 slots)
T5	0.700mm 0.0276"	21	holes (with 3 slots)
T6	0.900mm 0.0354"	4	holes (with 4 slots)
T7	0.950mm 0.0374"	12	holes
T8	1.100mm 0.0433"	32	holes
T9	1.570mm 0.0618"	2	holes
T10	2.300mm 0.0906"	4	holes
T11	3.000mm 0.1181"	8	holes
T12	3.800mm 0.1496"	4	holes

Total plated holes count 1662

Drill file 'rpi_cm4_cm5_CarrierBoard--NPTH.drl' contains unplated through holes:
=====

Drill	Size	Count	Notes
T1	0.650mm 0.0256"	2	holes (with 1 slot)
T2	1.100mm 0.0433"	1	hole
T3	1.600mm 0.0630"	1	hole
T4	1.700mm 0.0669"	4	holes
T5	3.300mm 0.1299"	2	holes
T6	5.000mm 0.1969"	2	holes (with 2 slots)

Total unplated holes count 12

Revision	Change Order

Designed by: Jean-Francois Bilodeau P.Eng #6022173 203-1690 rue des quatre-saisons Sherbrooke, Canada, J1E0N2 KICad Rev 9.0		Logo Sheet Size: A3
Project: RPI CMx Carrier	Drawn by: Jean-Francois Bilodeau	
Sheet Title: rpi_cm4_cm5_CarrierBoard.kicad_pcb	Approved by: Not applicable	Sheet: 16 of 16
Date: 2026-03-02	BOM:	Status: Release
		Current Revision: 2.00-0A