


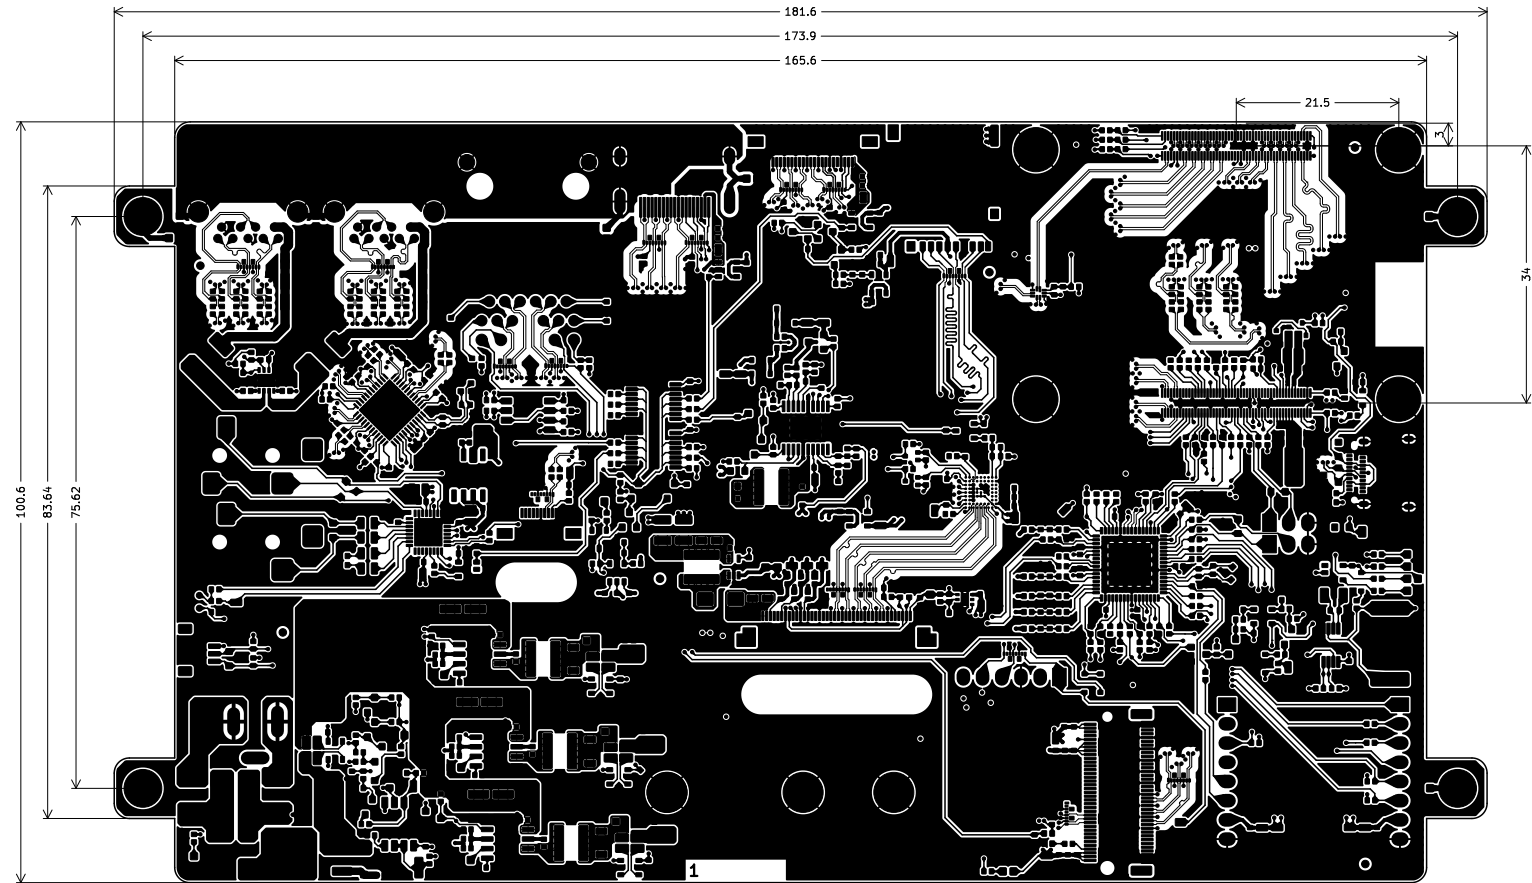

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

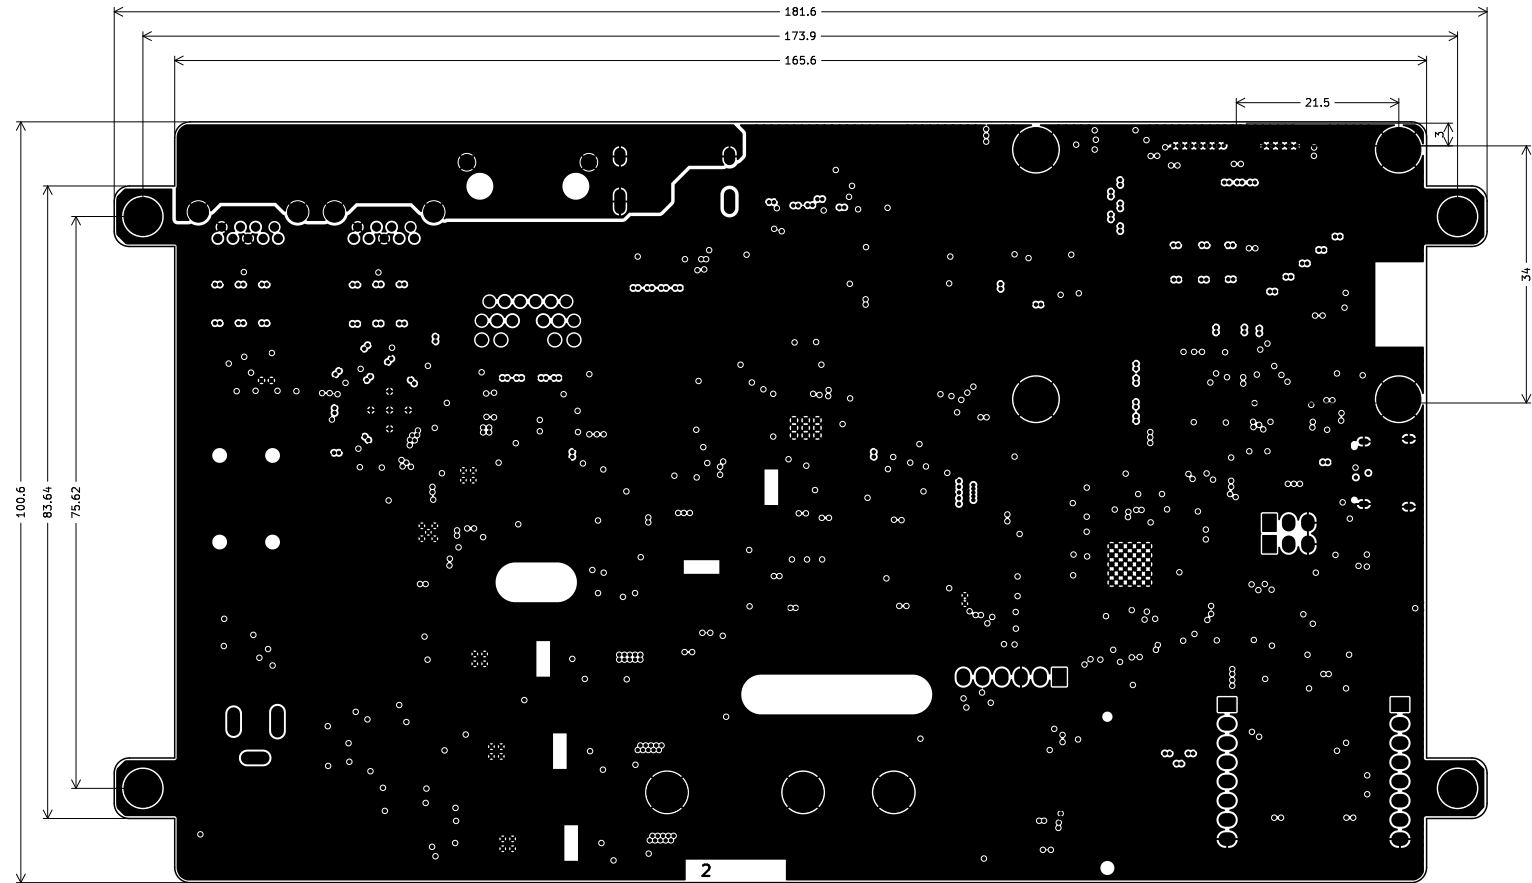

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

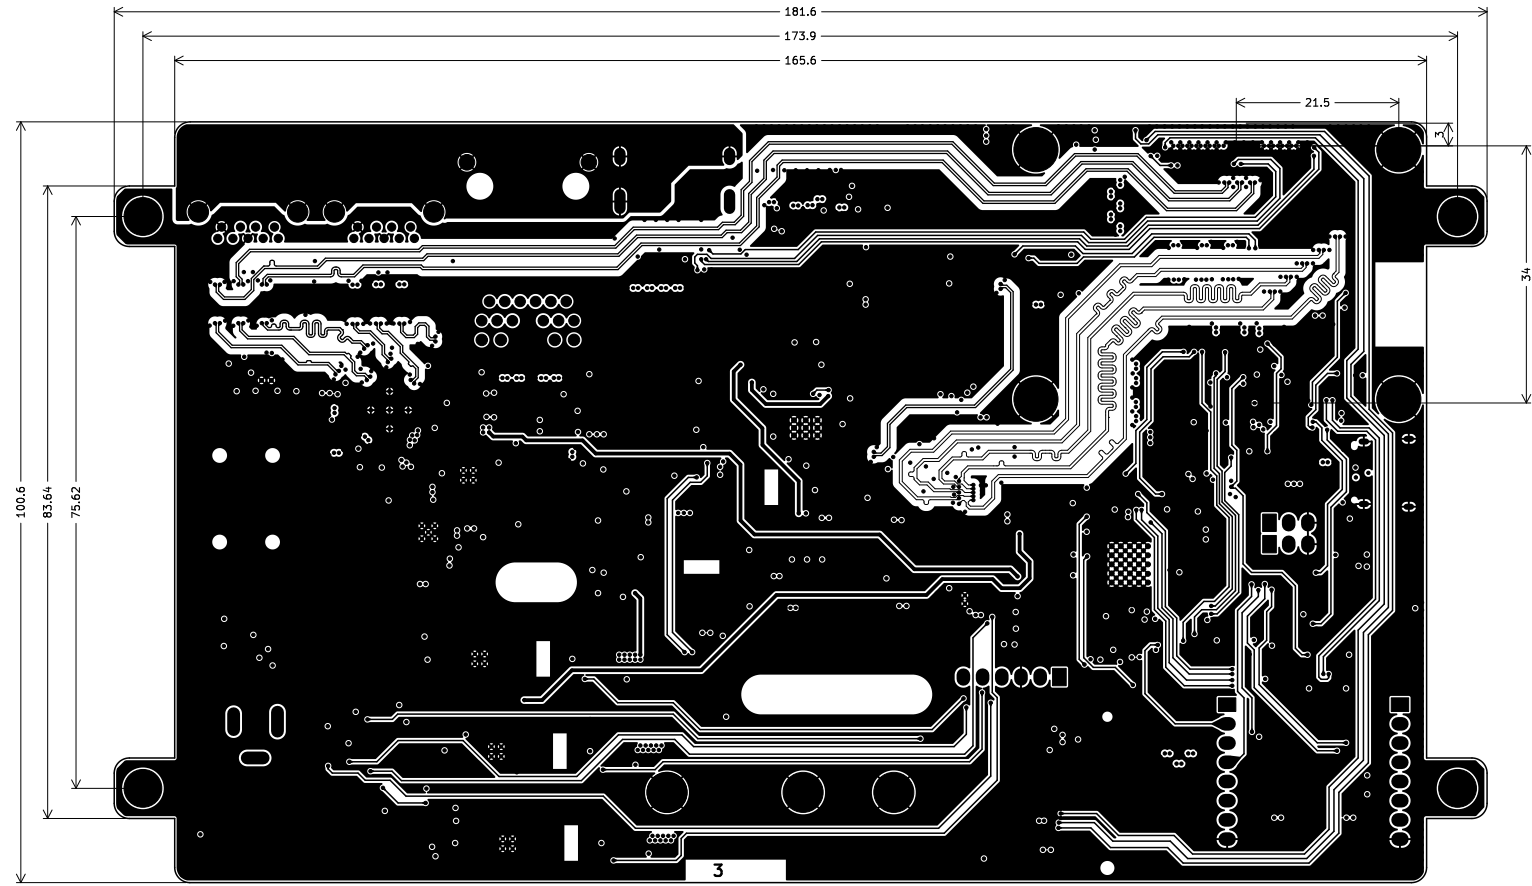

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

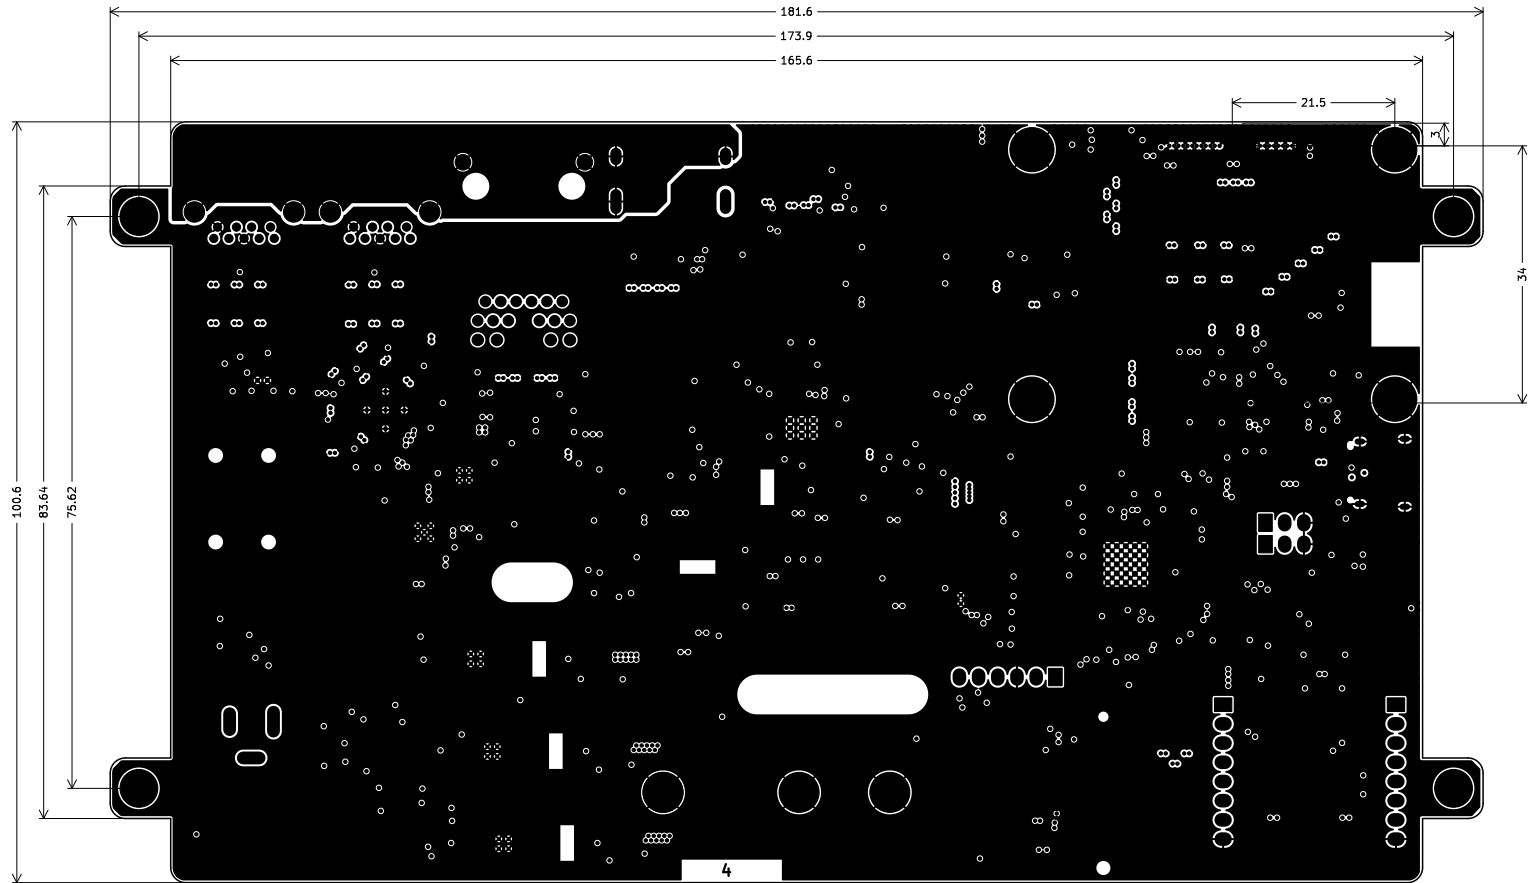

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

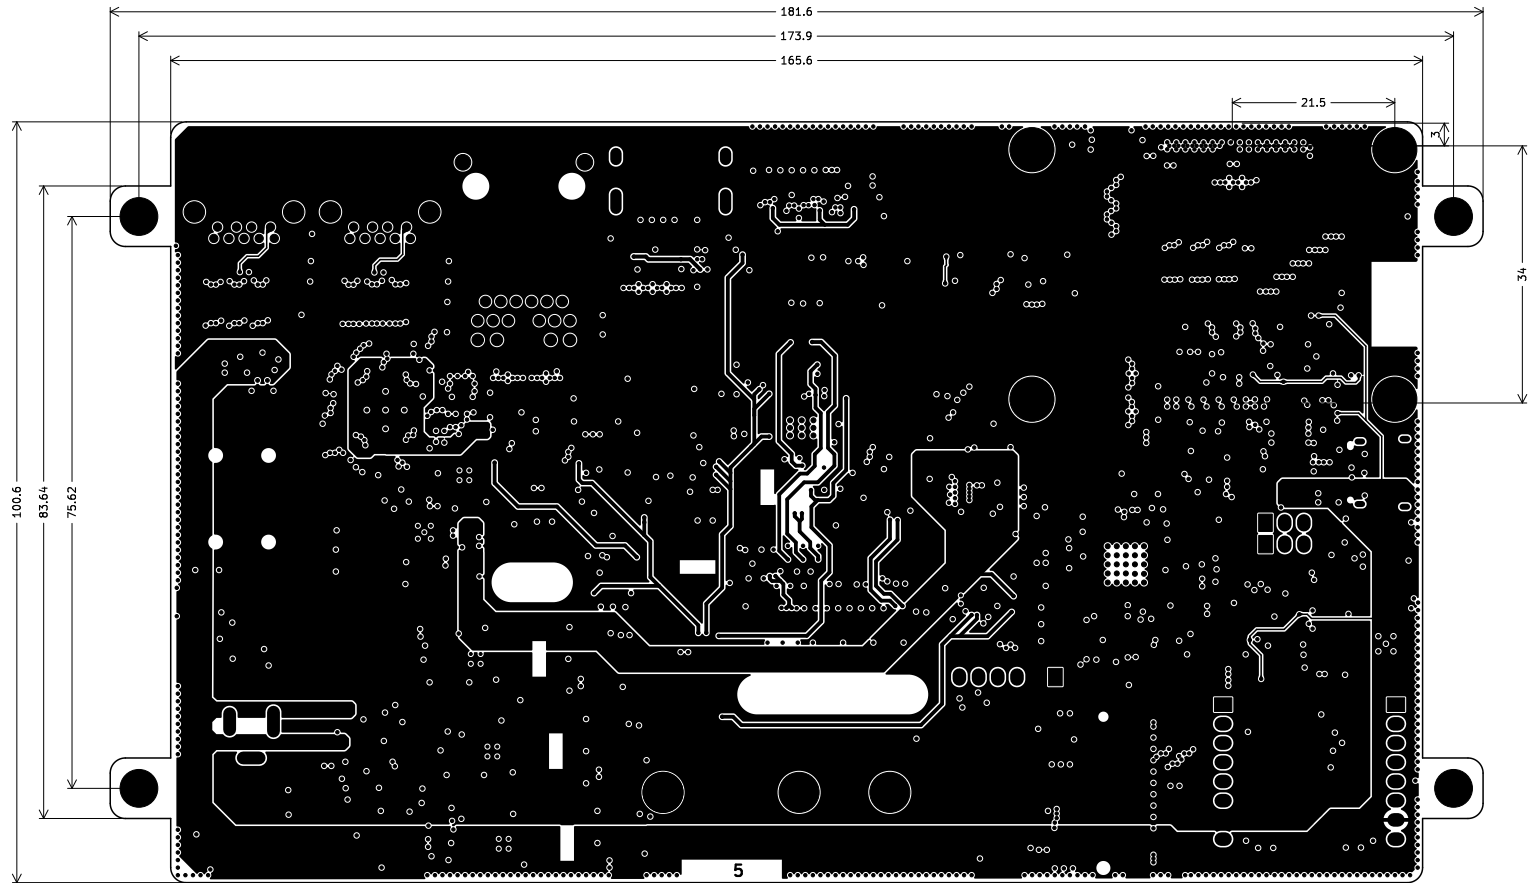

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

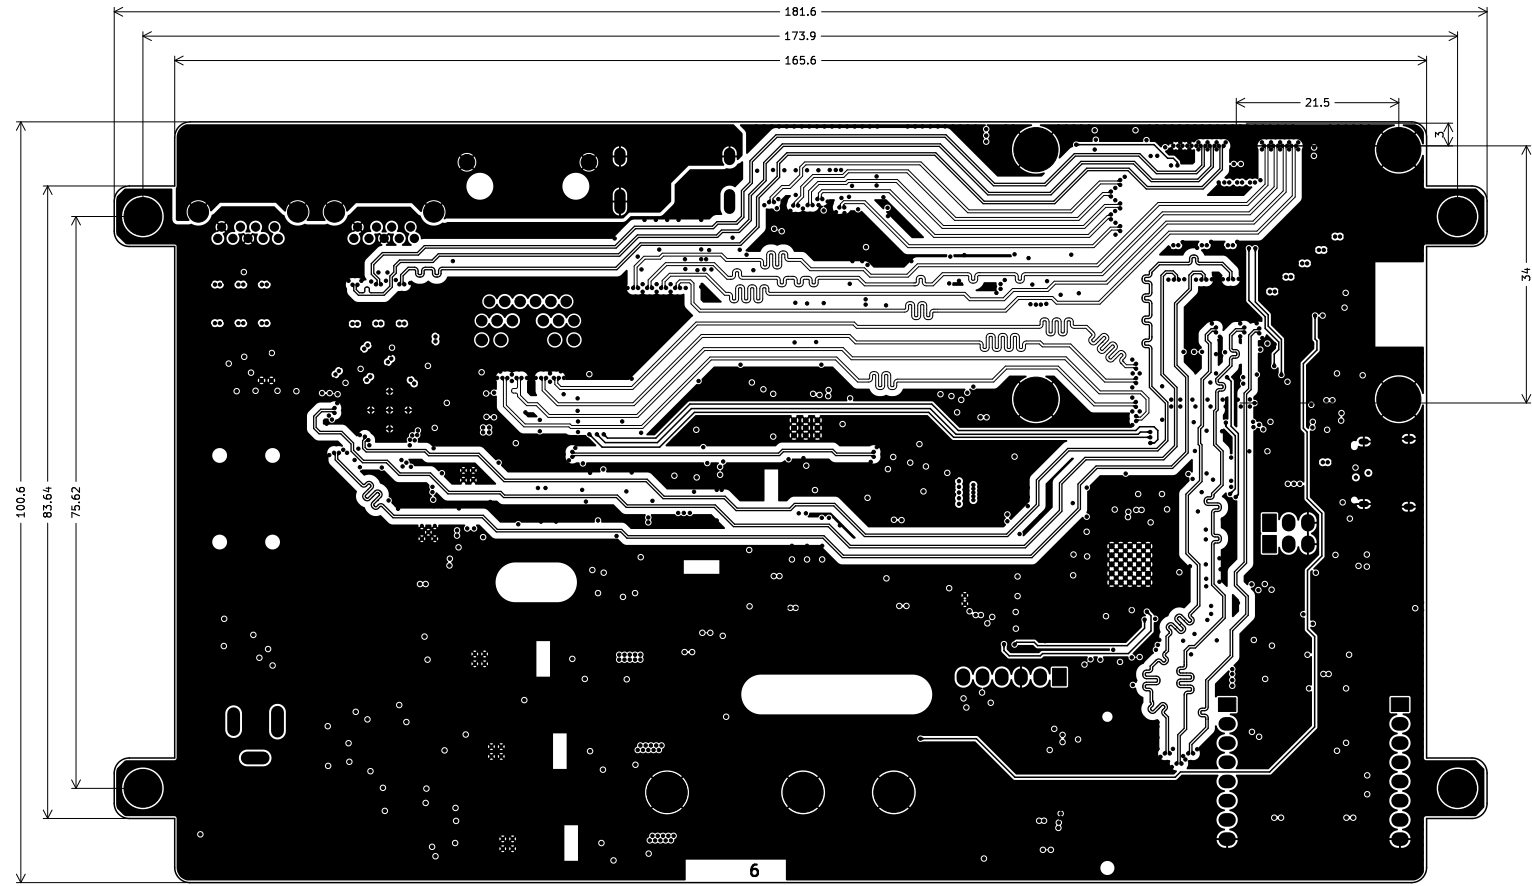

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

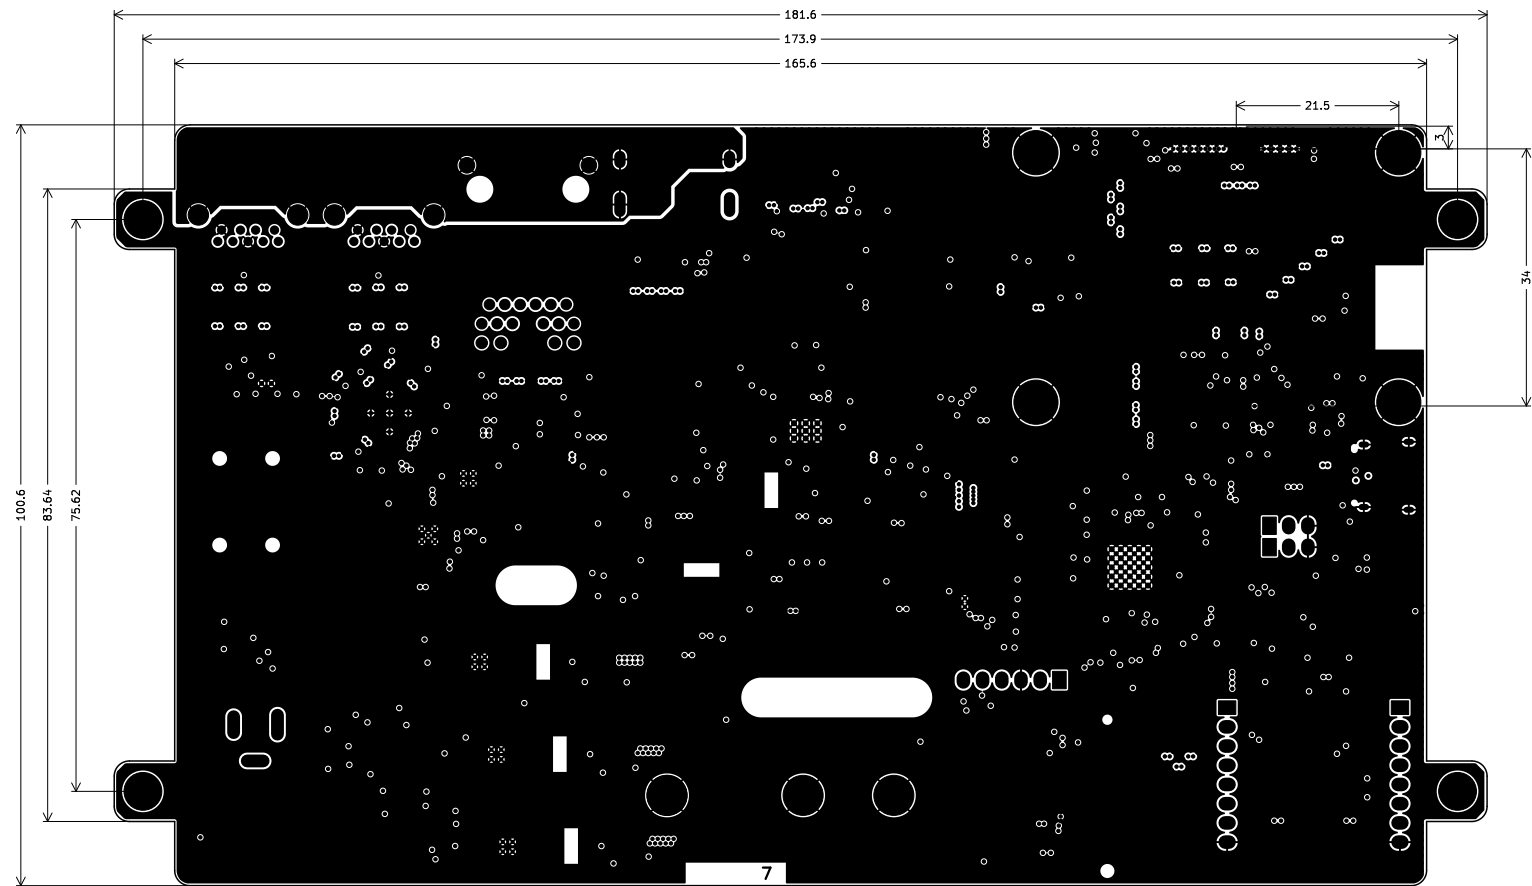

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

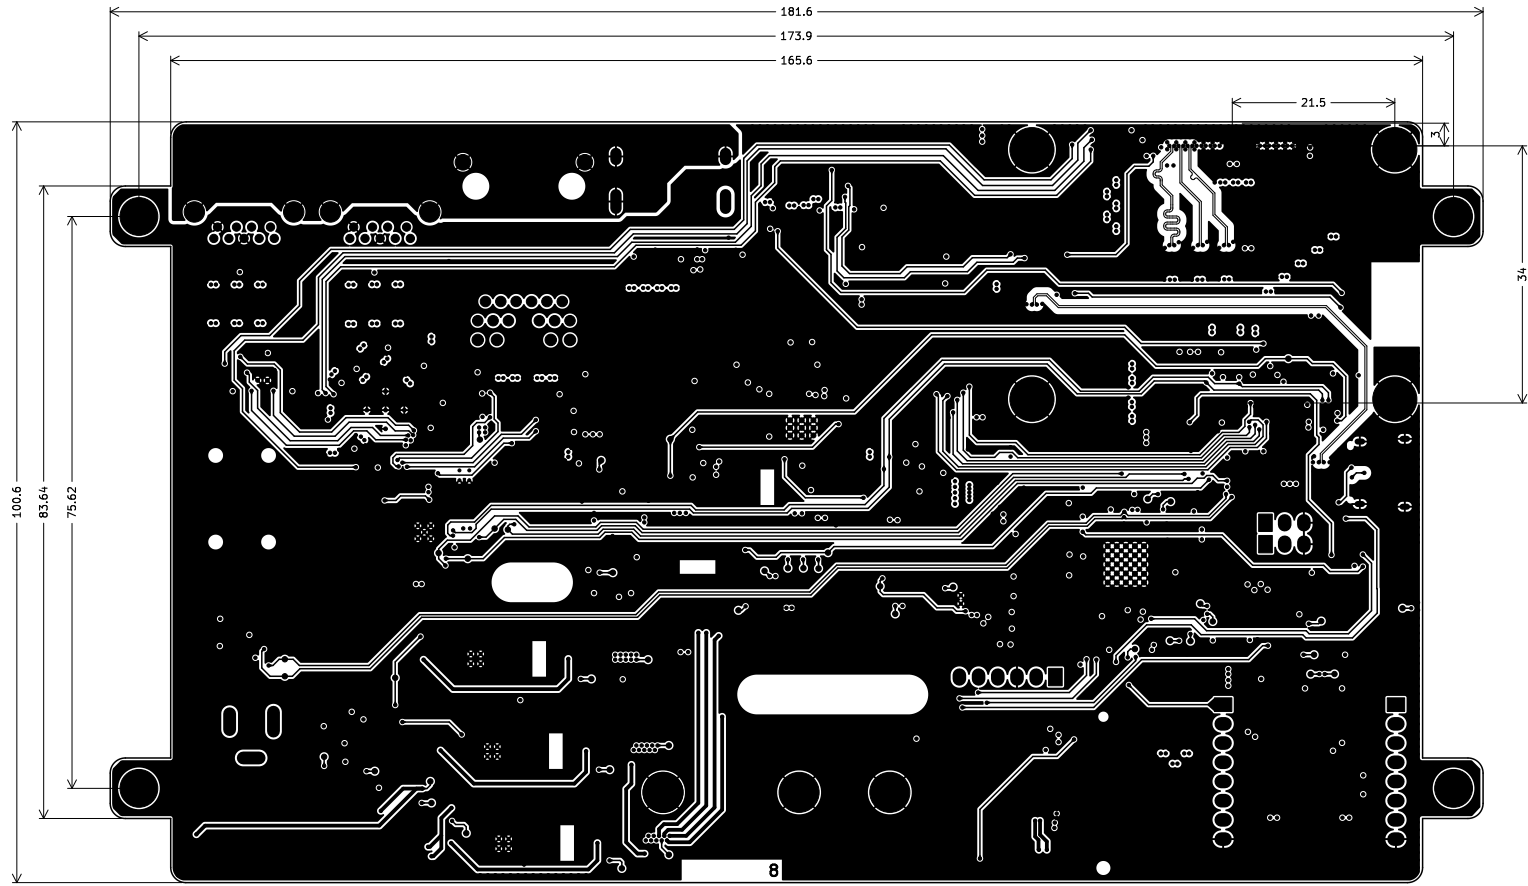

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

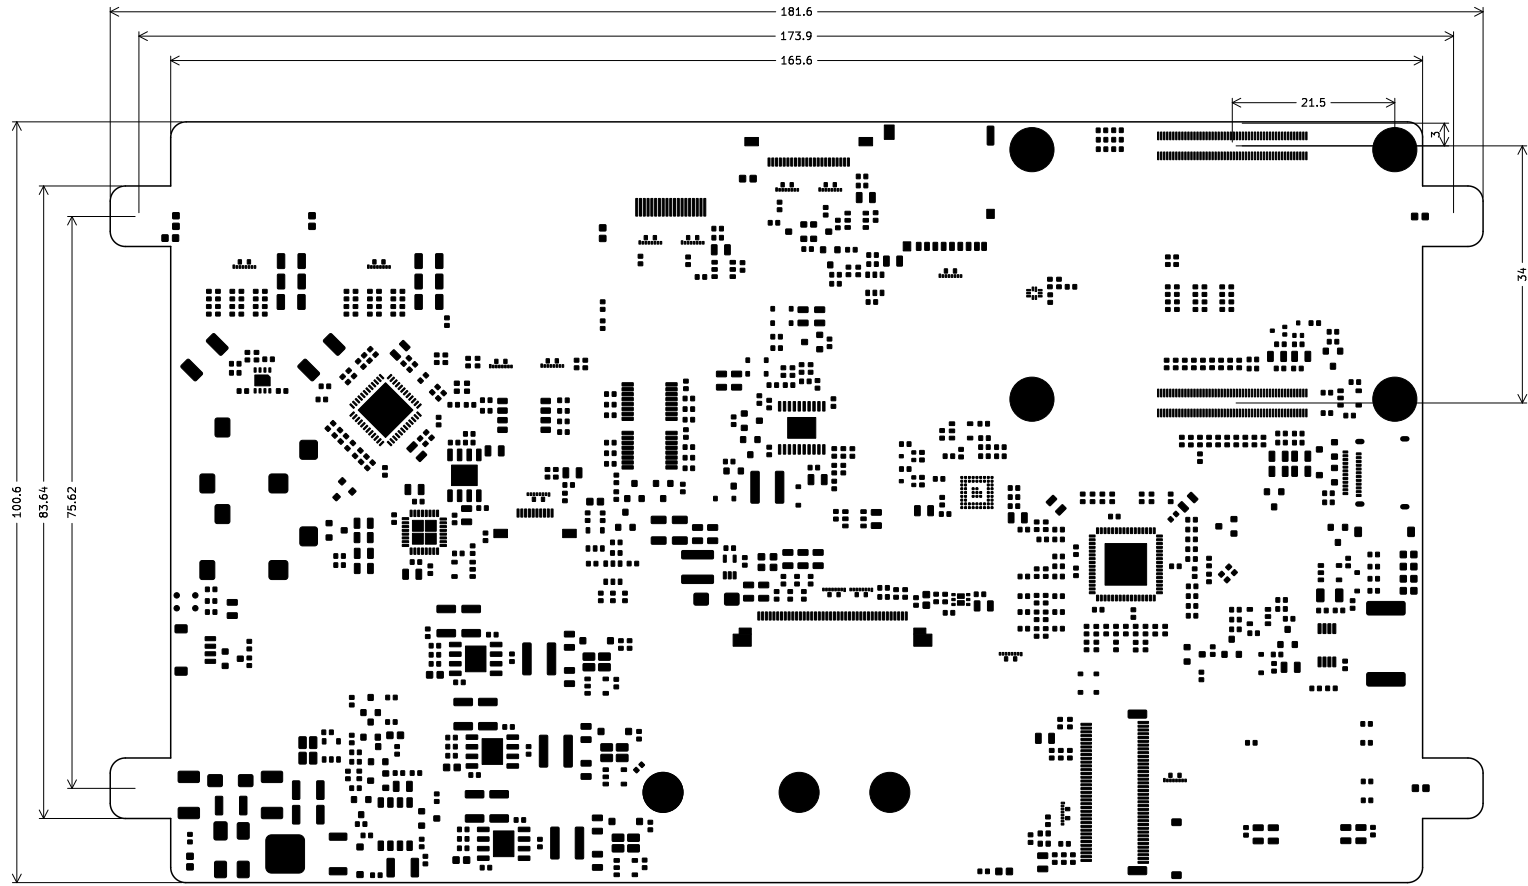

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

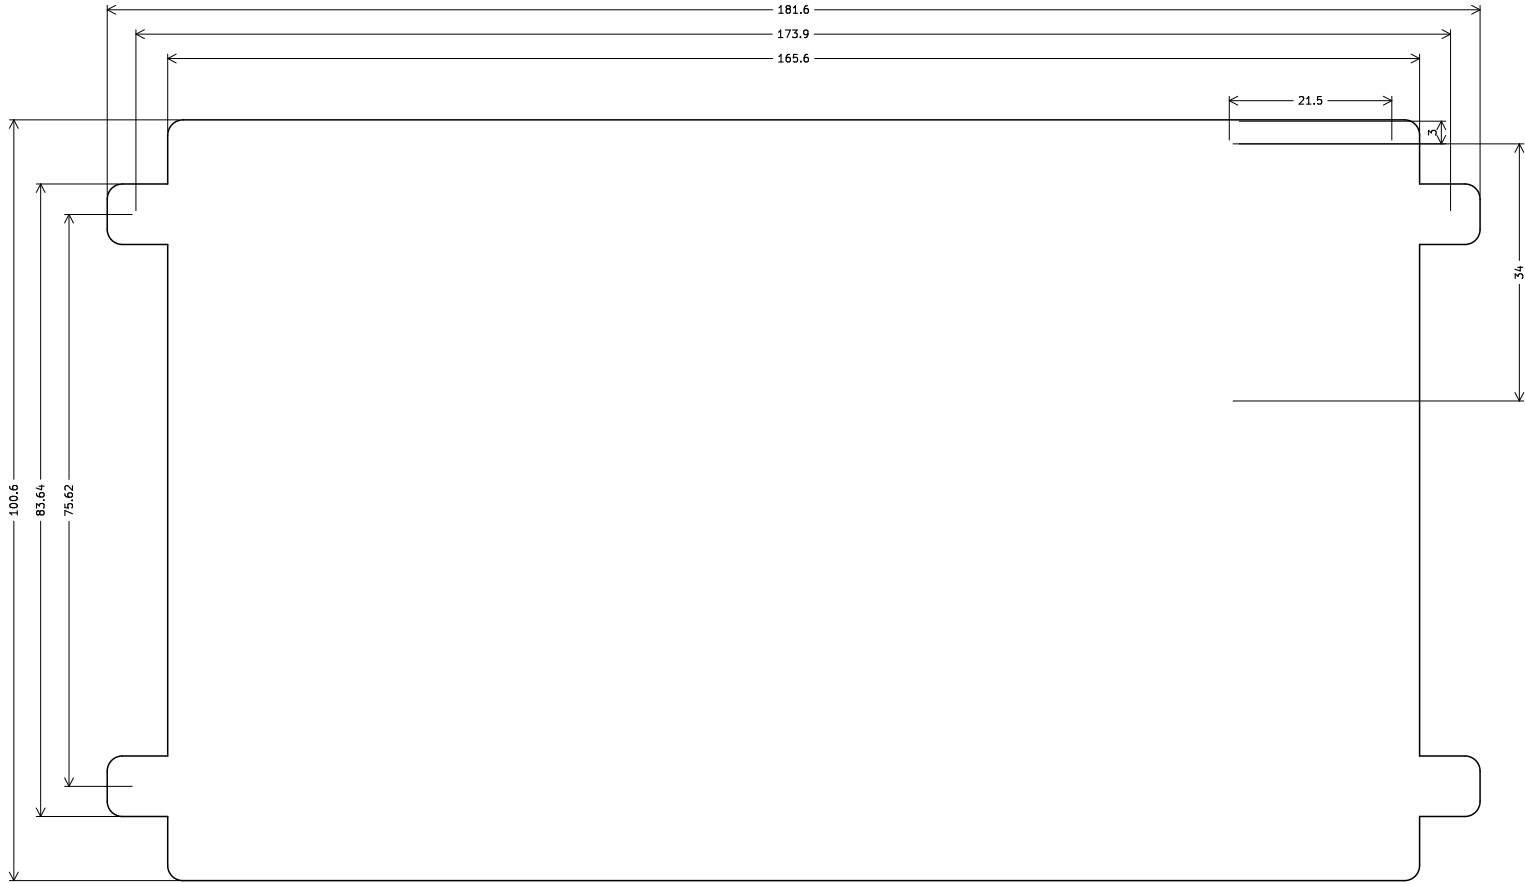

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

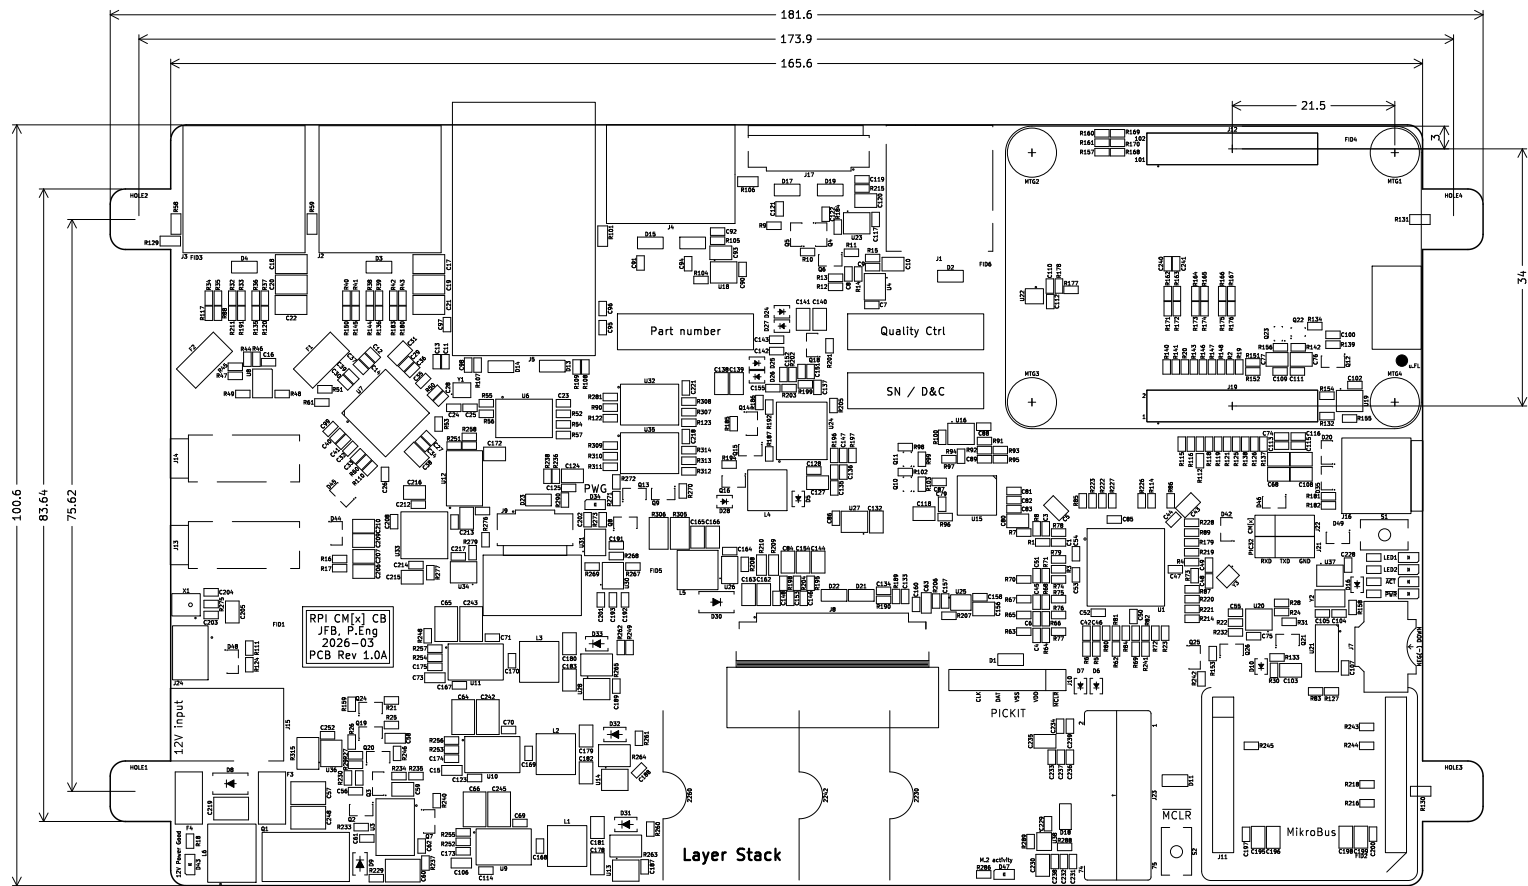

BOARD CHARACTERISTICS

Copper Layer Count: 8 Board Thickness: 1.6560 mm
Board overall dimensions: 181.6000 mm x 100.6000 mm
Min track/spacing: 0.1270 mm / 0.1270 mm Min hole diameter: 0.1500 mm
Copper Finish: ENIG Impedance Control: Yes
Castellated pads: No Plated Board Edge: No
Edge card connectors: No

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1 0.200mm 0.0079" (1493 holes)
T2 0.200mm 0.0079" (30 holes)
T3 0.330mm 0.0130" (34 holes)
T4 0.500mm 0.0197" (4 holes) (with 4 slots)
T5 0.700mm 0.0276" (21 holes) (with 3 slots)
T6 0.890mm 0.0350" (12 holes)
T7 0.900mm 0.0354" (4 holes) (with 4 slots)
T8 1.020mm 0.0402" (4 holes)
T9 1.100mm 0.0433" (28 holes)
T10 1.570mm 0.0618" (2 holes)
T11 2.300mm 0.0906" (4 holes)
T12 3.000mm 0.1181" (8 holes)
T13 3.800mm 0.1496" (4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1 0.650mm 0.0256" (2 holes) (with 1 slot)
T2 1.100mm 0.0433" (1 hole)
T3 1.600mm 0.0630" (1 hole)
T4 1.700mm 0.0669" (4 holes)
T5 3.300mm 0.1299" (2 holes)
T6 5.000mm 0.1969" (2 holes) (with 2 slots)

Total unplated holes count 12

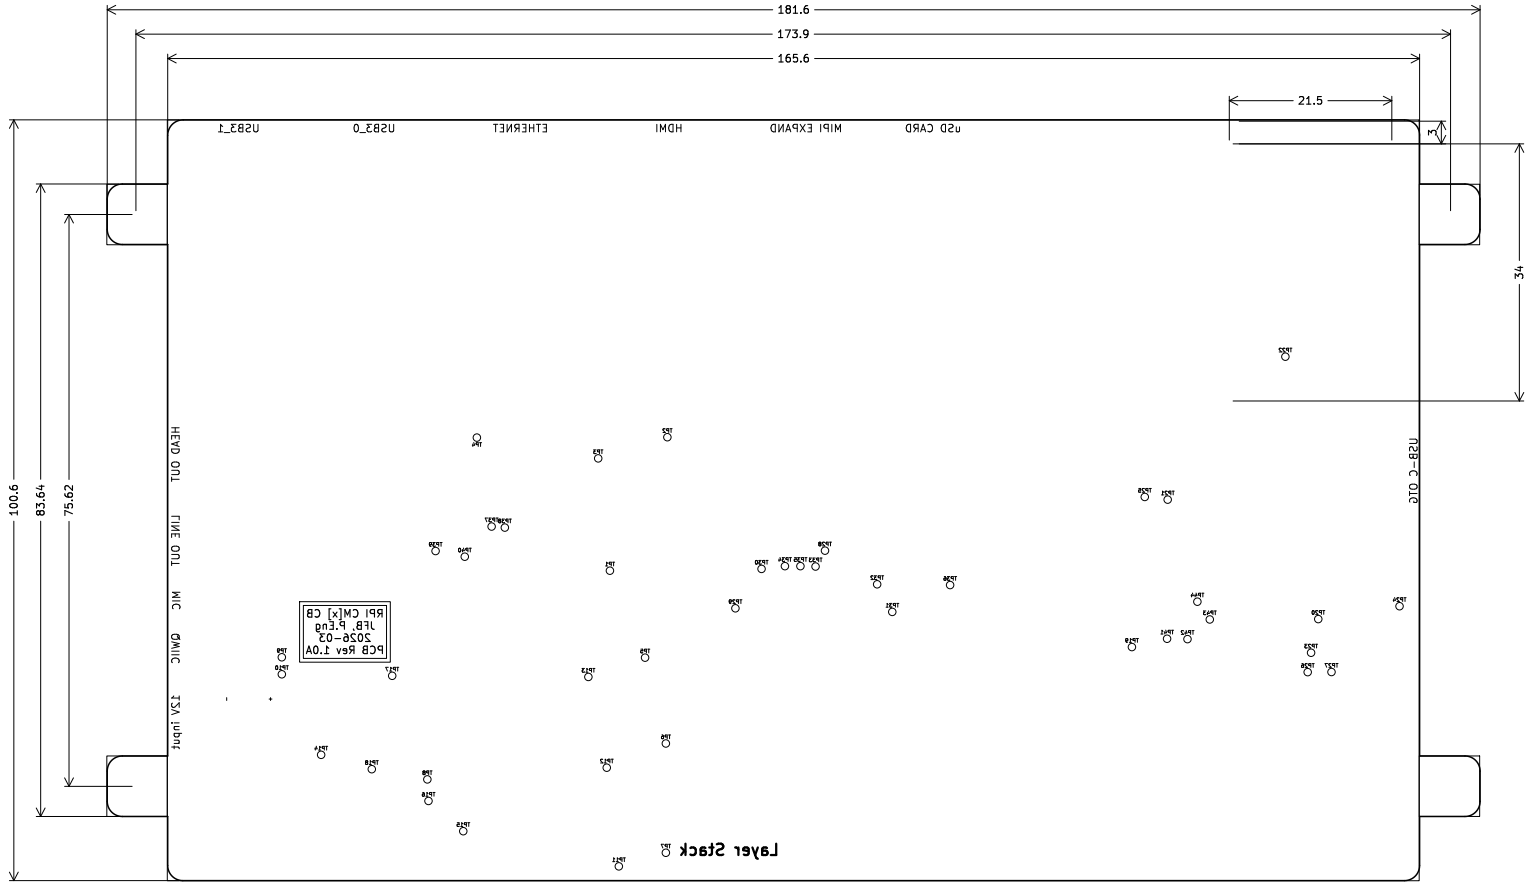

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

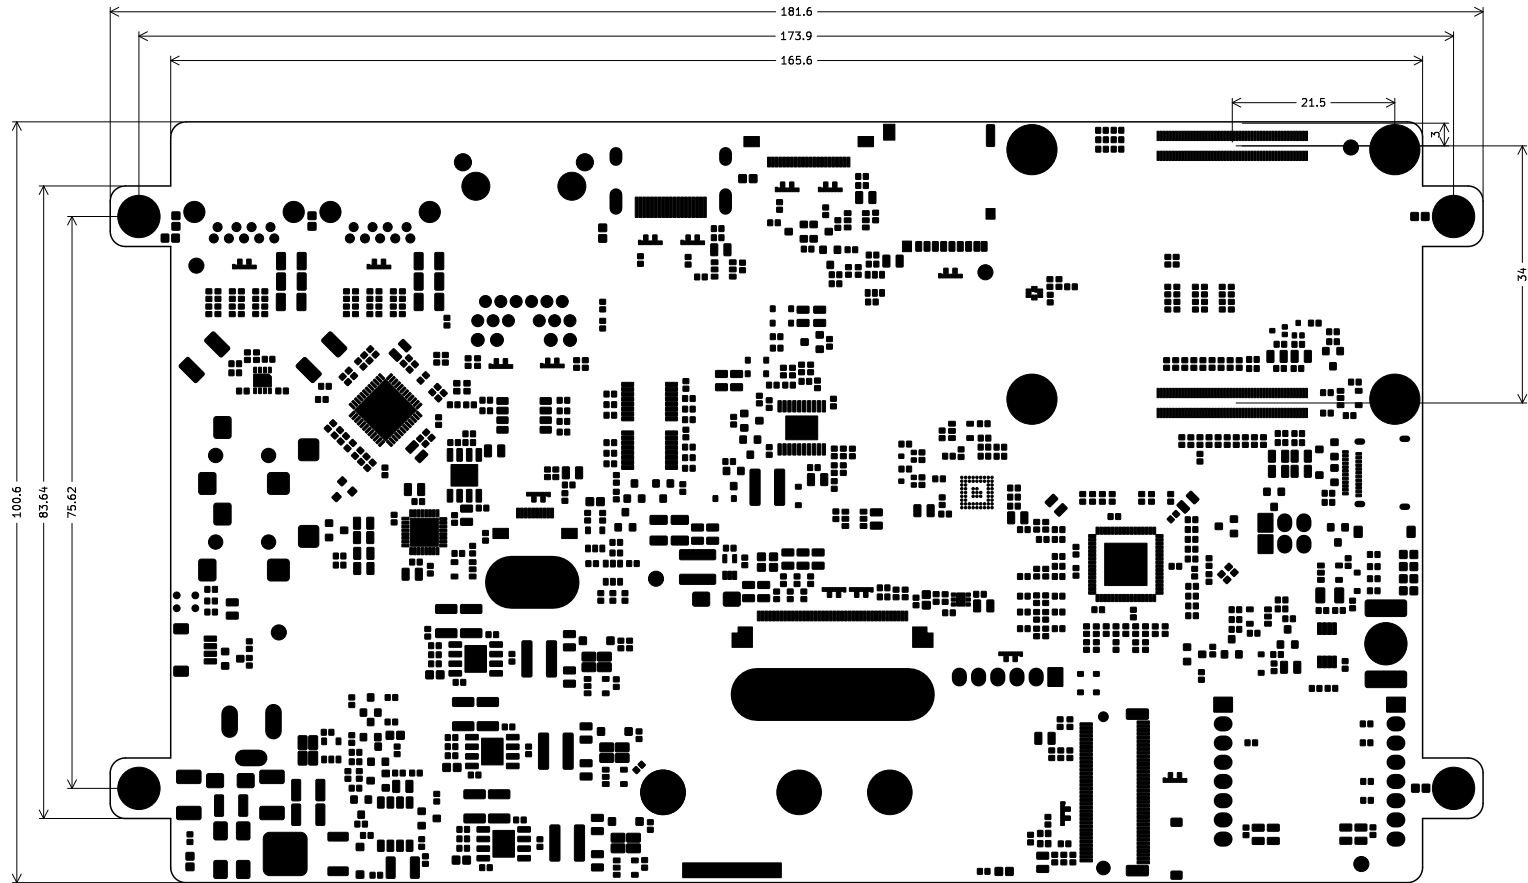

BOARD CHARACTERISTICS

Copper Layer Count:8Board Thickness:1.6560 mm

Board overall dimensions:181.6000 mm x 100.6000 mm

Min track/spacing:0.1270 mm / 0.1270 mmMin hole diameter:0.1500 mm

Copper Finish:ENIGImpedance Control:Yes

Castellated pads:NoPlated Board Edge:No

Edge card connectors:No

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

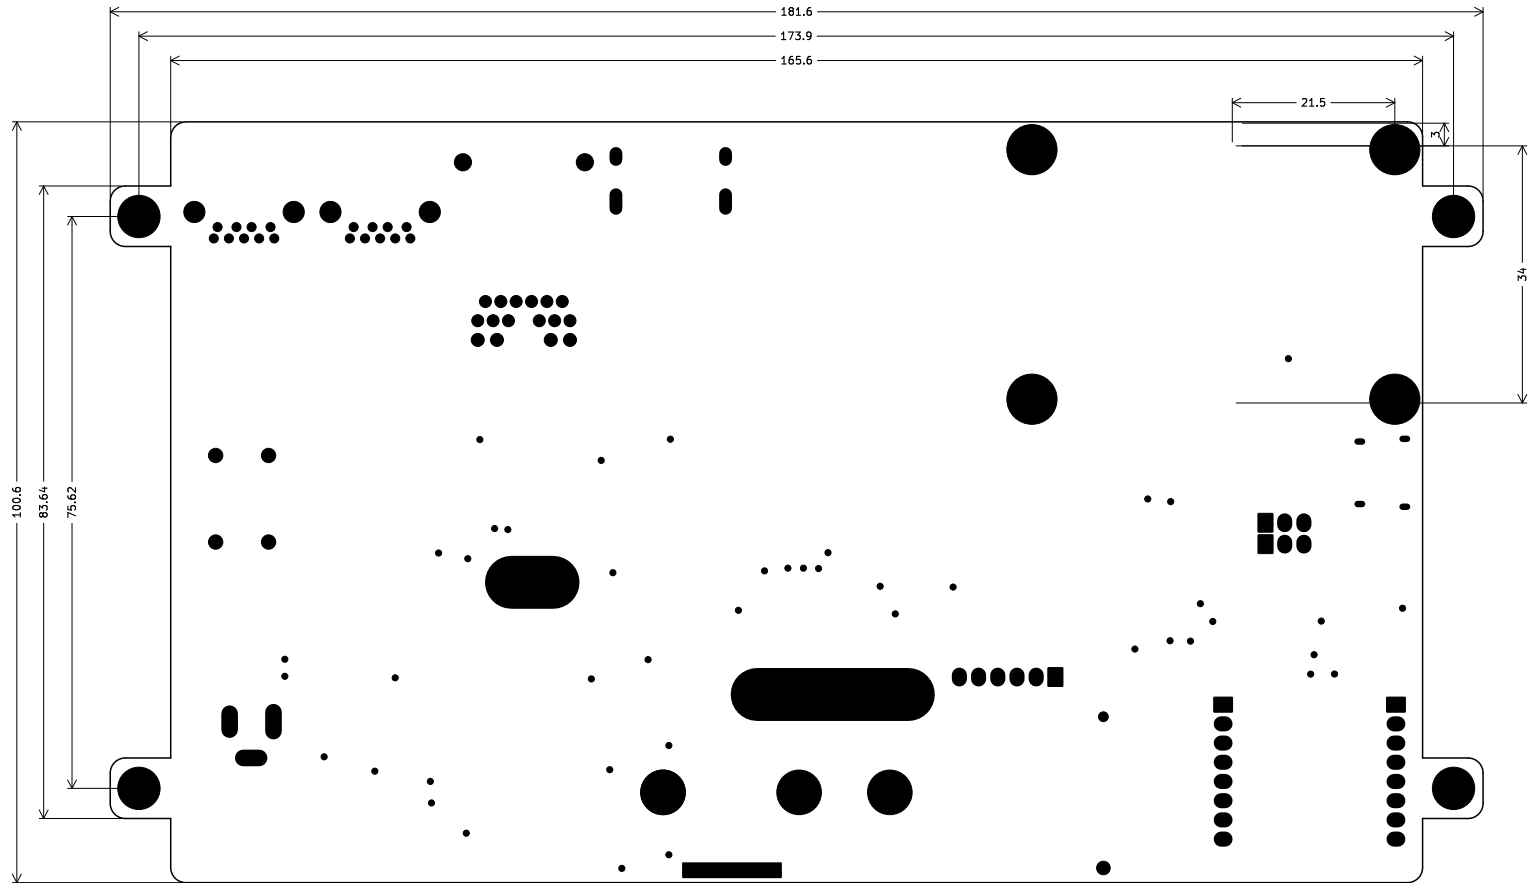

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

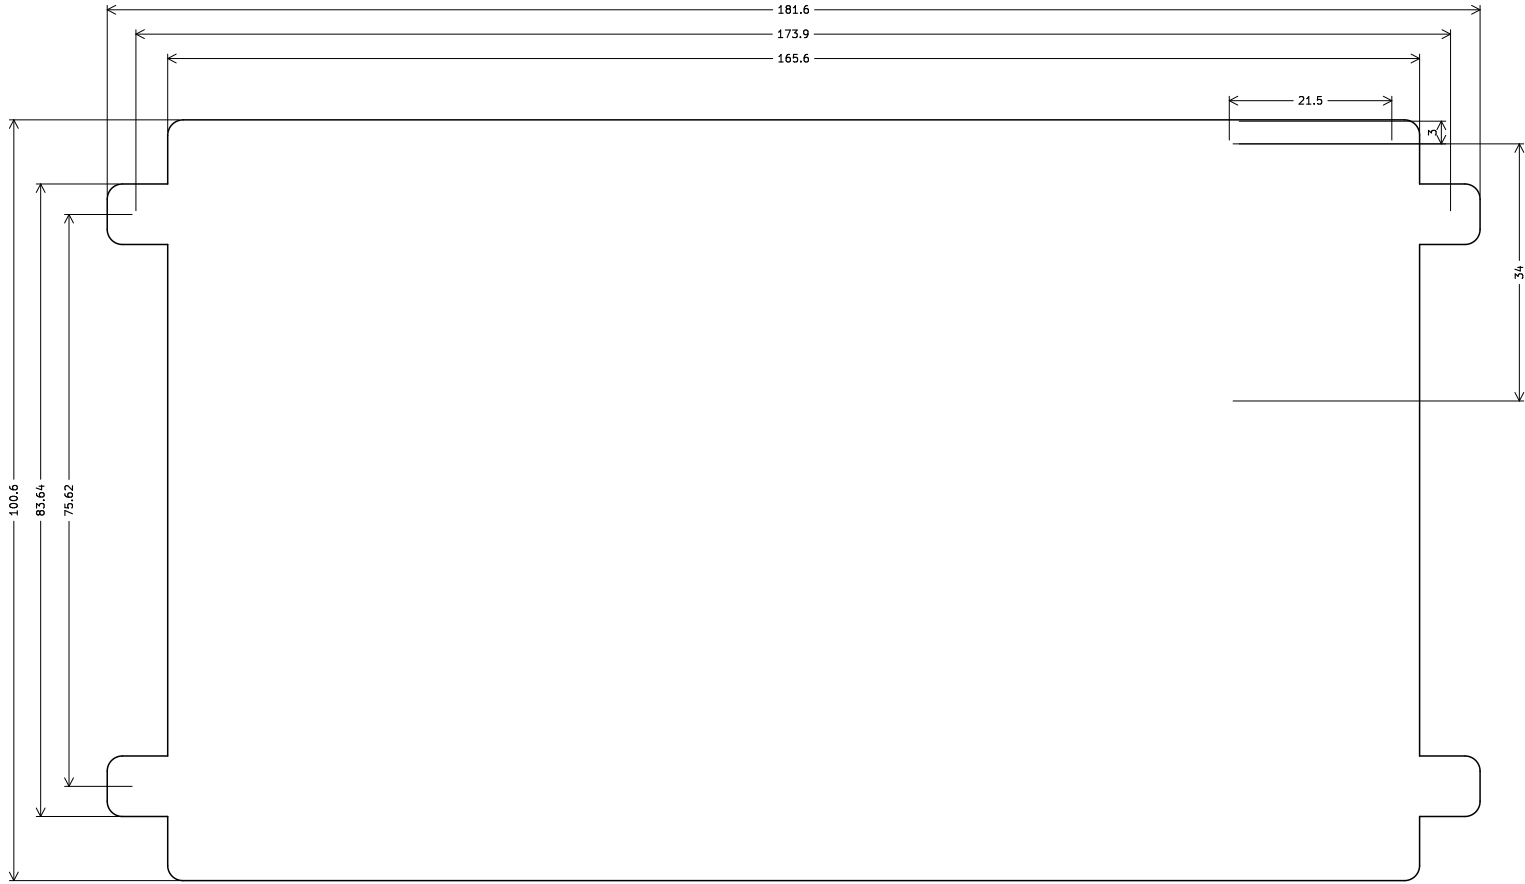

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:


T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12

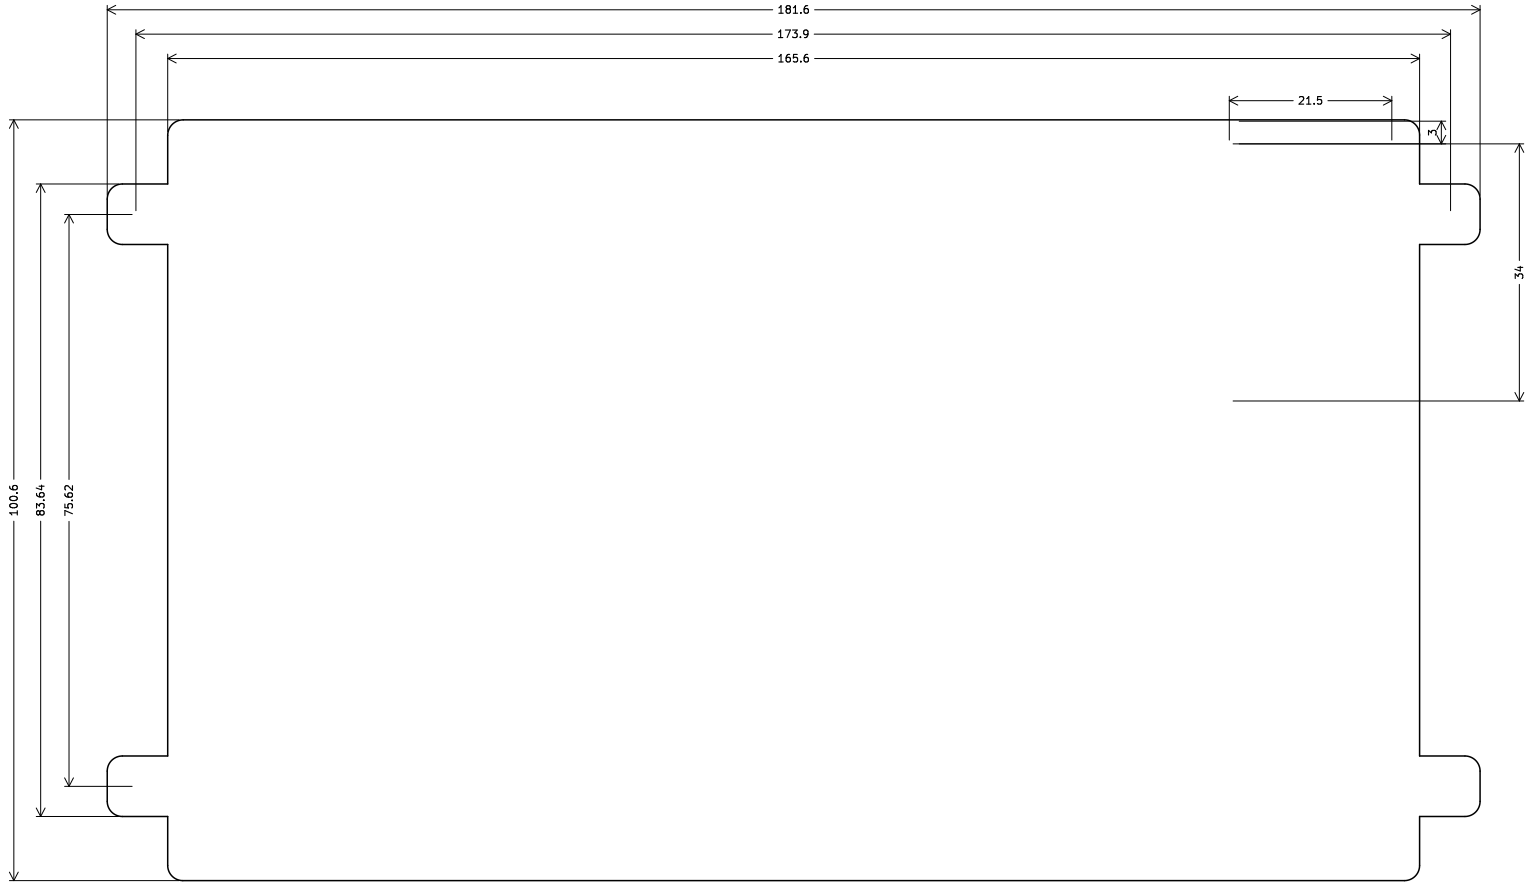

BOARD CHARACTERISTICS

Copper Layer Count:	8	Board Thickness:	1.6560 mm
Board overall dimensions:	181.6000 mm x 100.6000 mm		
Min track/spacing:	0.1270 mm / 0.1270 mm	Min hole diameter:	0.1500 mm
Copper Finish:	ENIG	Impedance Control:	Yes
Castellated pads:	No	Plated Board Edge:	No
Edge card connectors:	No		

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric 1	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
In1.Cu	copper		0.03 mm		1	0
Dielectric 2	core	FR4	0.25 mm	Not specified	4.5	0.02
In2.Cu	copper		0.03 mm		1	0
Dielectric 3	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In3.Cu	copper		0.03 mm		1	0
Dielectric 4	core	FR4	0.25 mm	Not specified	4.5	0.02
In4.Cu	copper		0.03 mm		1	0
Dielectric 5	prepreg	FR4	0.218 mm	Not specified	4.5	0.02
In5.Cu	copper		0.03 mm		1	0
Dielectric 6	core	FR4	0.25 mm	Not specified	4.5	0.02
In6.Cu	copper		0.03 mm		1	0
Dielectric 7	prepreg	FR4	0.109 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.001 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

Drill file 'rpi_cm4_cm5_CarrierBoard-PTH.drl' contains plated through holes:

T1	0.200mm	0.0079"	(1493 holes)
T2	0.200mm	0.0079"	(30 holes)
T3	0.330mm	0.0130"	(34 holes)
T4	0.500mm	0.0197"	(4 holes) (with 4 slots)
T5	0.700mm	0.0276"	(21 holes) (with 3 slots)
T6	0.890mm	0.0350"	(12 holes)
T7	0.900mm	0.0354"	(4 holes) (with 4 slots)
T8	1.020mm	0.0402"	(4 holes)
T9	1.100mm	0.0433"	(28 holes)
T10	1.570mm	0.0618"	(2 holes)
T11	2.300mm	0.0906"	(4 holes)
T12	3.000mm	0.1181"	(8 holes)
T13	3.800mm	0.1496"	(4 holes)

Total plated holes count 1648

Drill file 'rpi_cm4_cm5_CarrierBoard-NPTH.drl' contains unplated through holes:

T1	0.650mm	0.0256"	(2 holes) (with 1 slot)
T2	1.100mm	0.0433"	(1 hole)
T3	1.600mm	0.0630"	(1 hole)
T4	1.700mm	0.0669"	(4 holes)
T5	3.300mm	0.1299"	(2 holes)
T6	5.000mm	0.1969"	(2 holes) (with 2 slots)

Total unplated holes count 12