




CAN bus interface  
CAN 2.0B support  
Max bitrate 550kbps

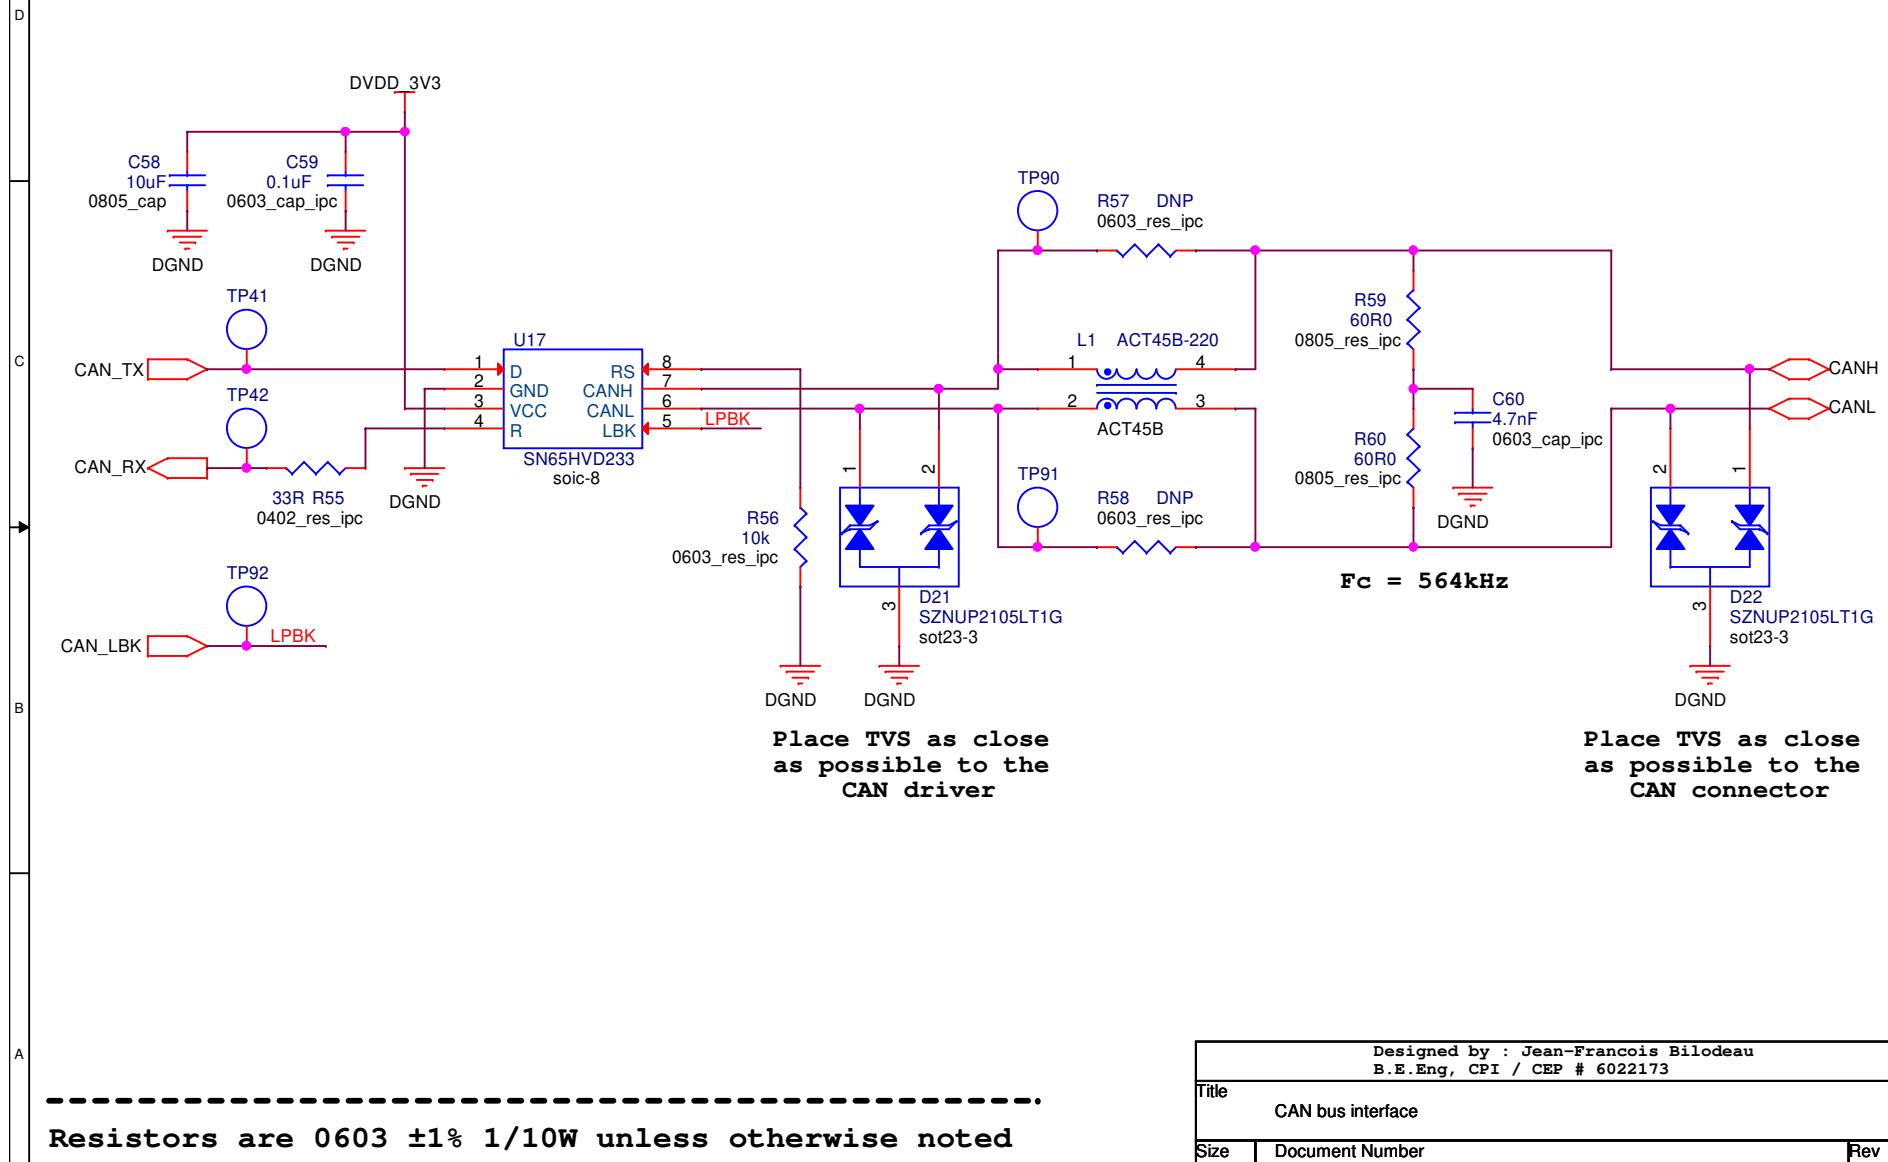


Resistors are 0603  $\pm 1\%$  1/10W unless otherwise noted  
Capacitor are 0603  $\pm 20\%$  16V unless otherwise noted


Designed by : Jean-Francois Bilodeau B.E.Eng, CPI / CEP # 6022173	
Title CAN bus interface	
Size A	Document Number <Doc>
Date:	Saturday, January 09, 2021

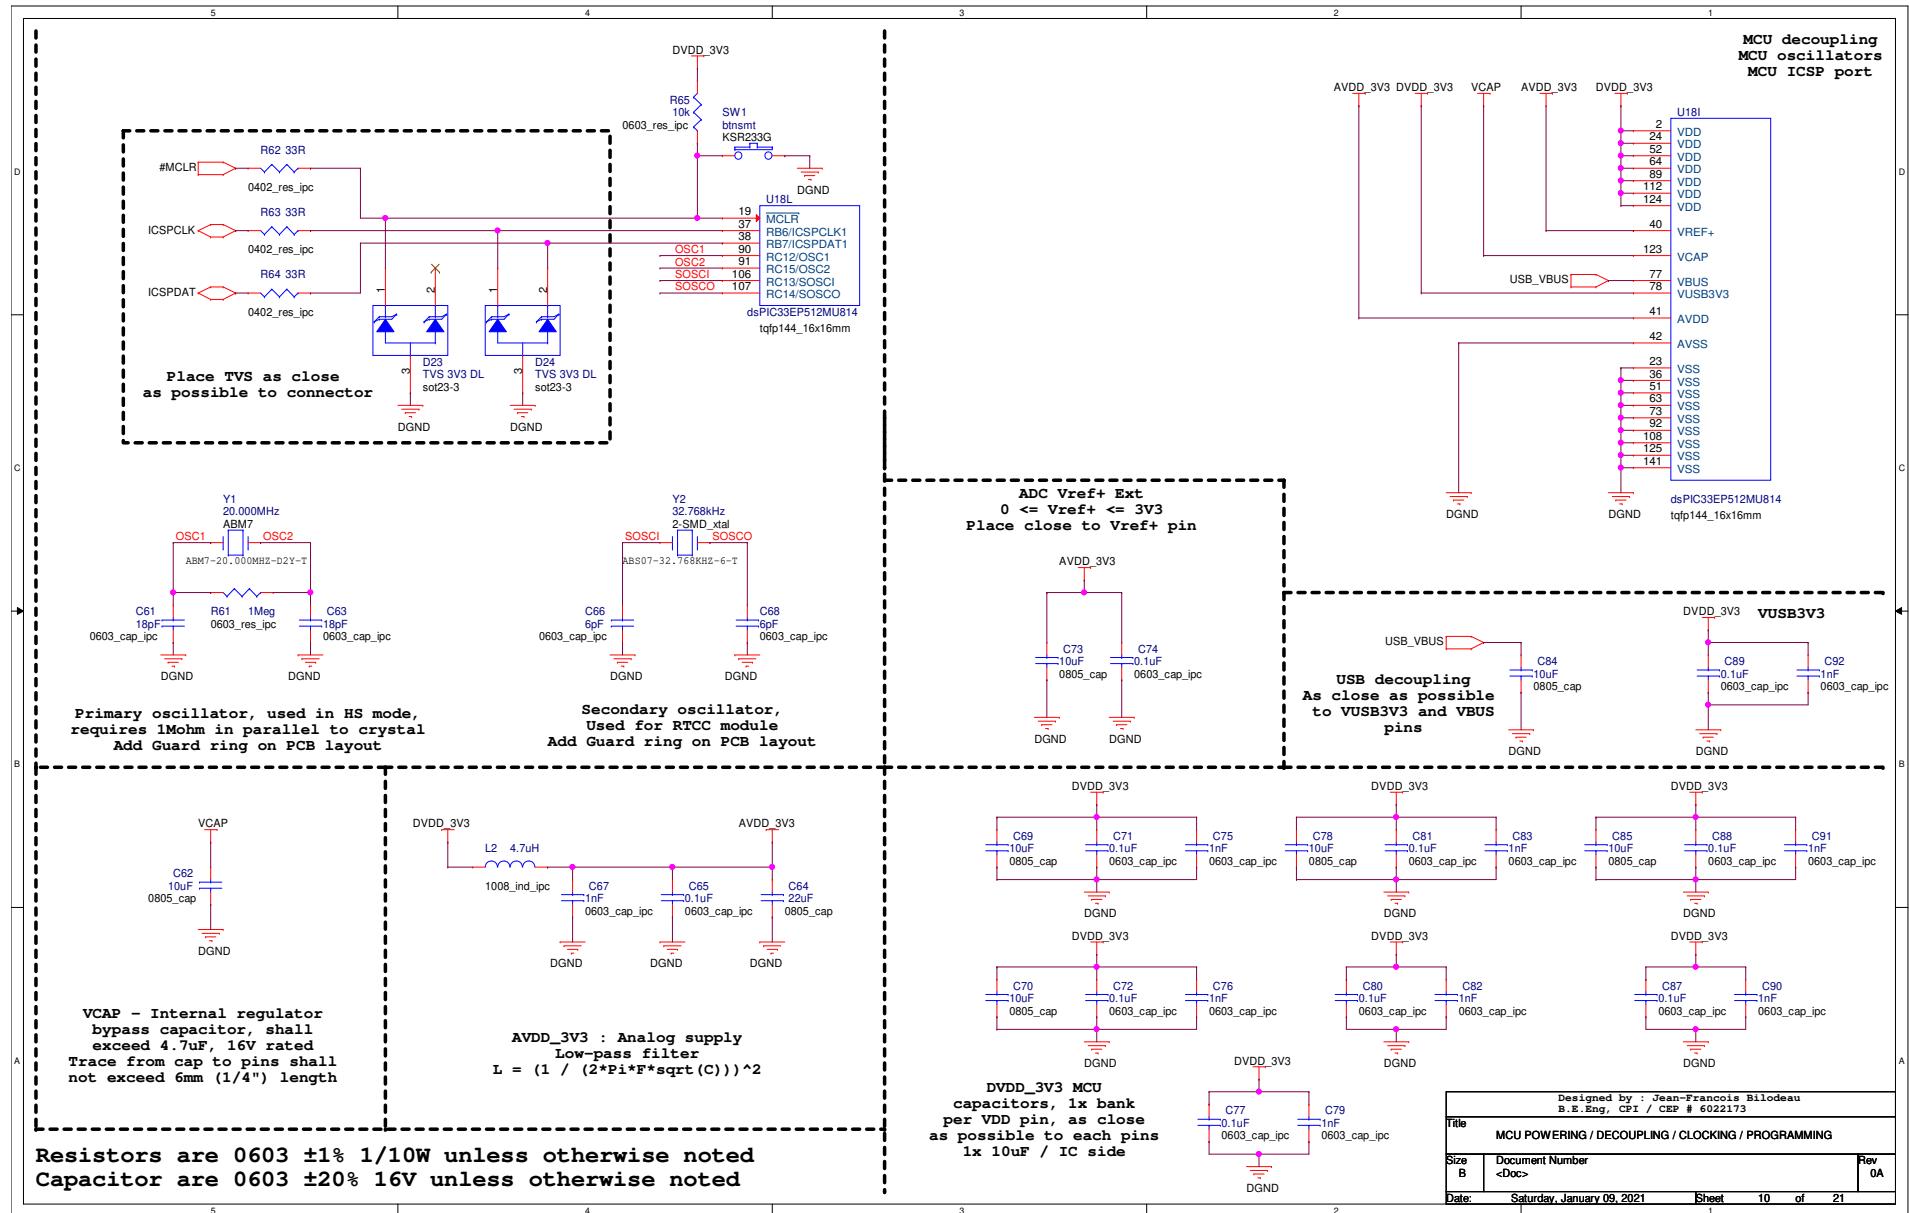

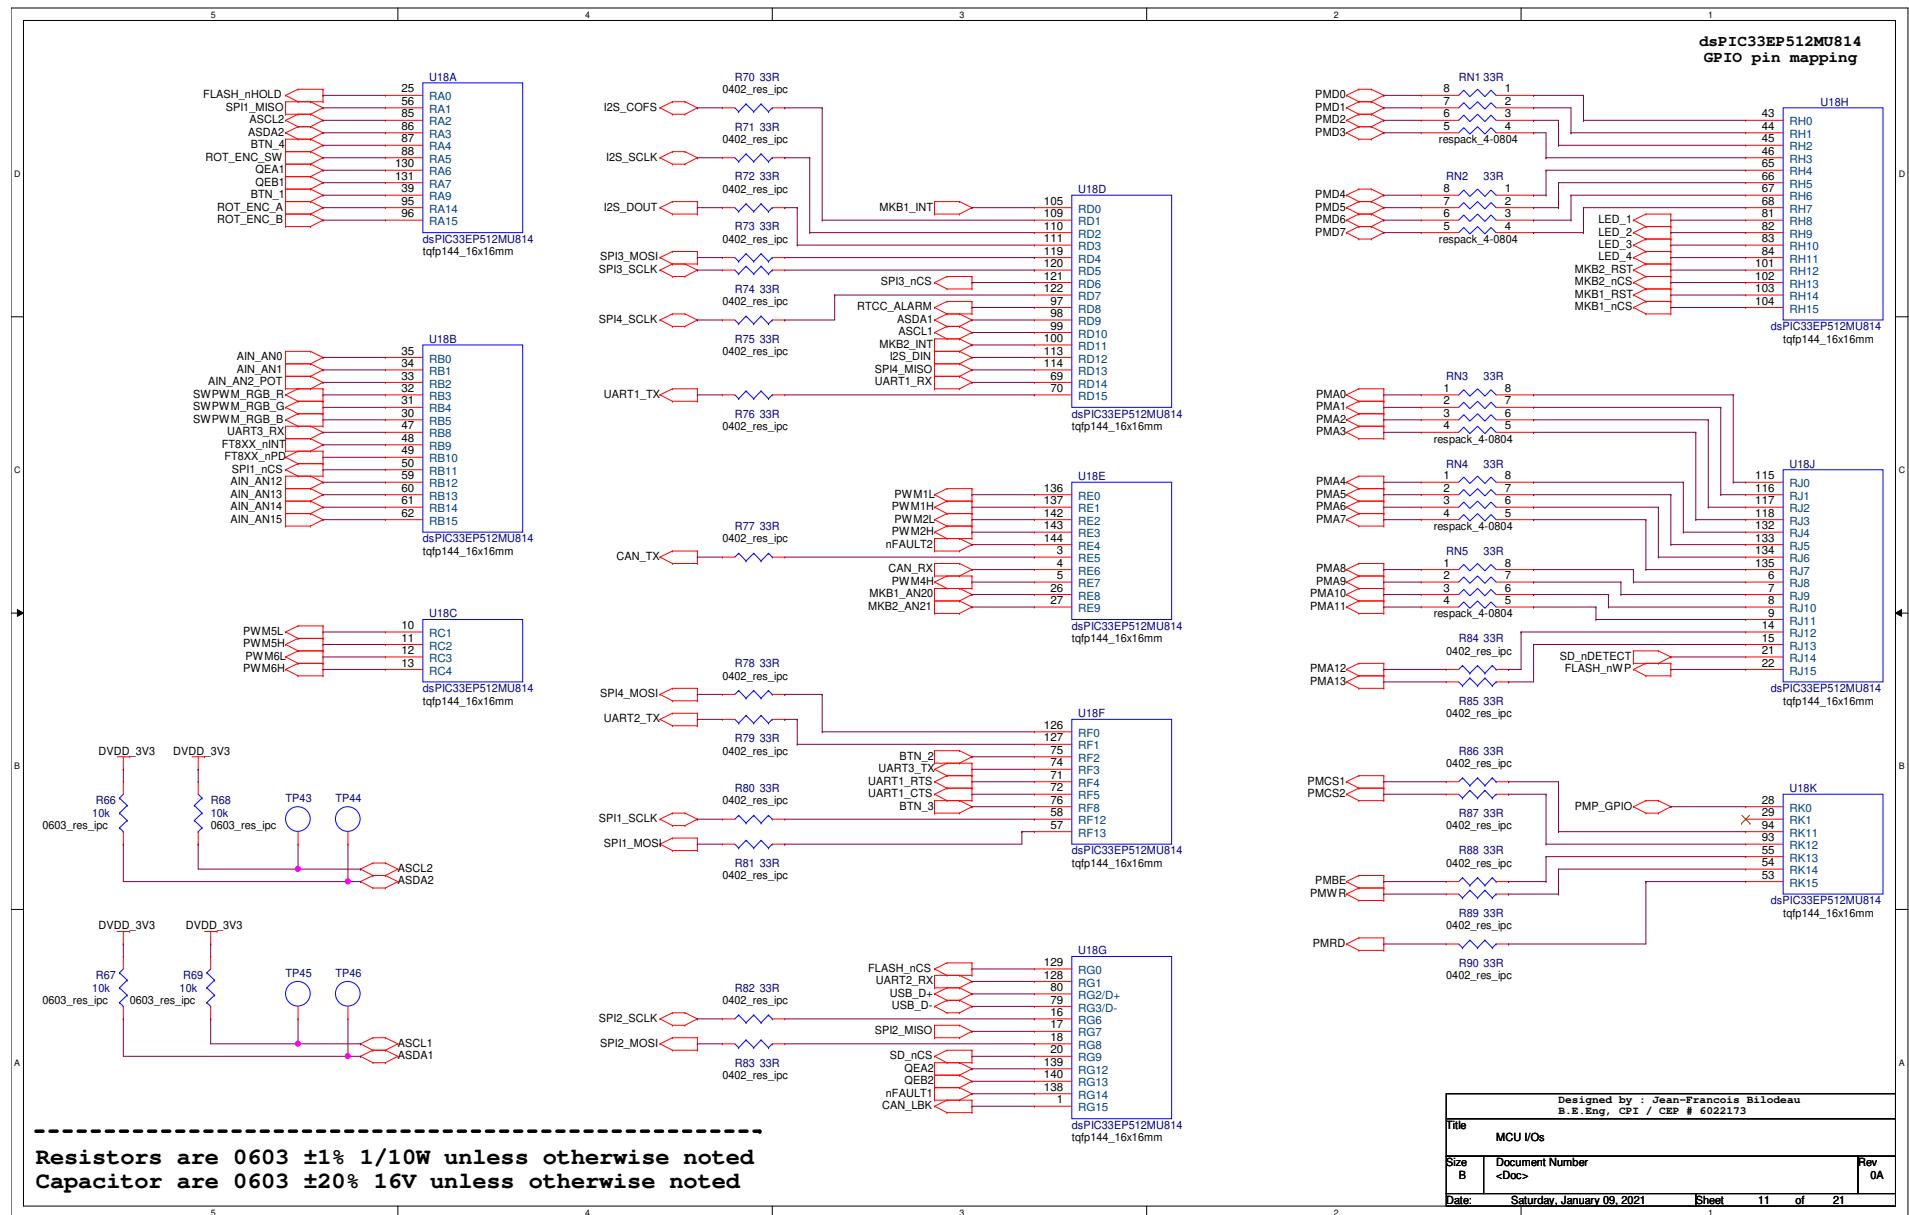

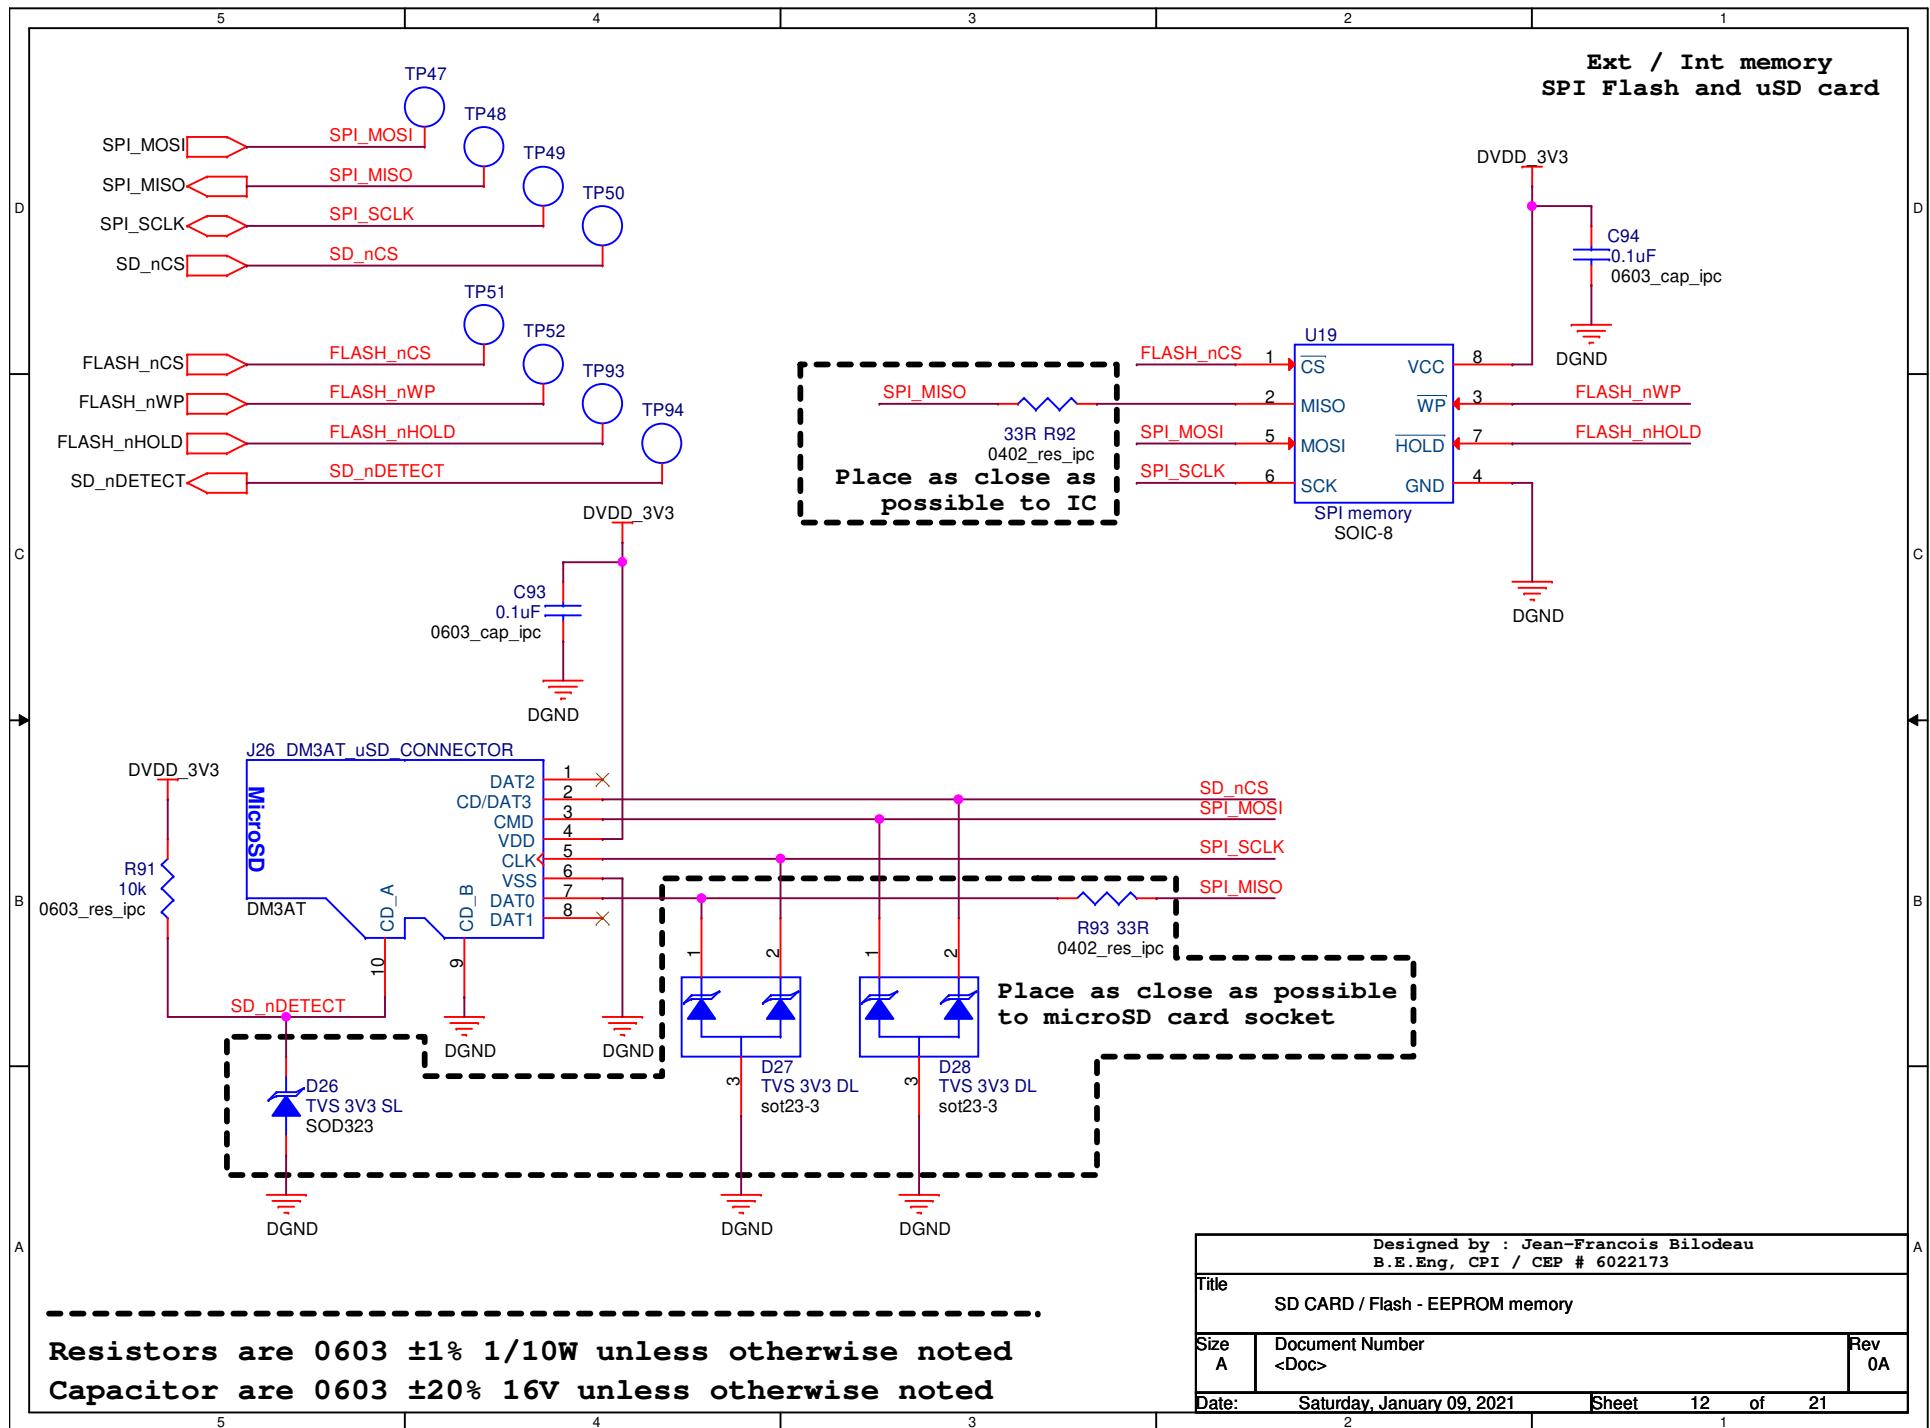



MikroBus port  
Click Board compatible  
General purpose I/Os

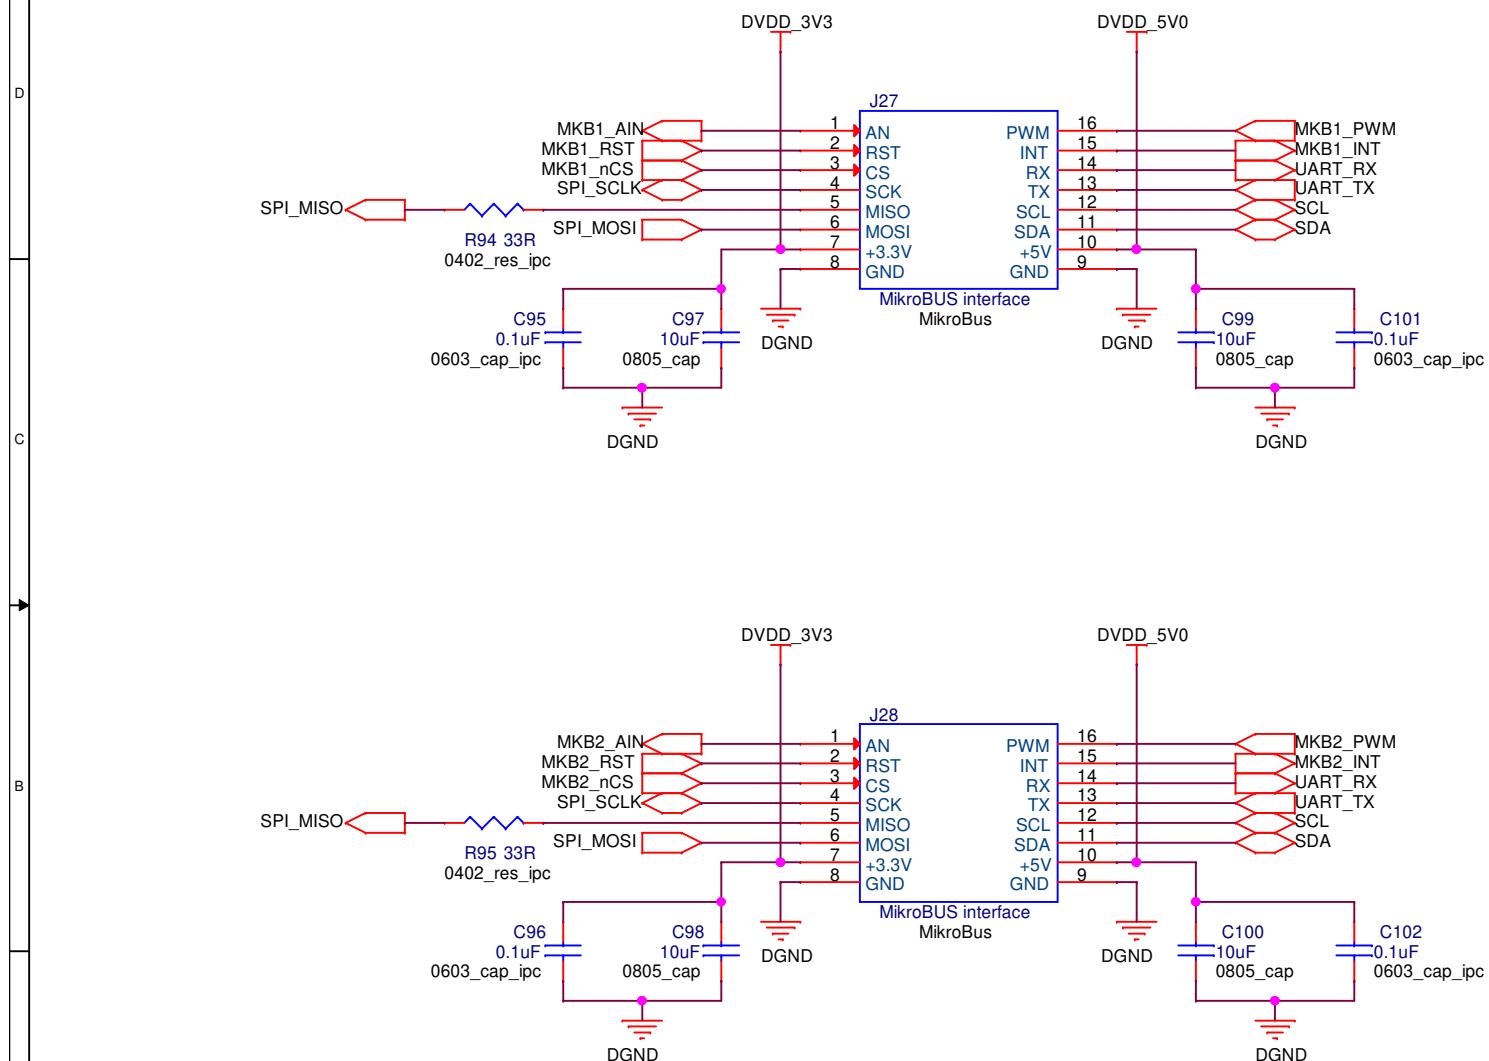



Resistors are 0603 ±1% 1/10W unless otherwise noted  
Capacitor are 0603 ±20% 16V unless otherwise noted

Designed by : Jean-Francois Bilodeau B.E.Eng, CPI / CEP # 6022173	
Title MikroBus interface	
Size A	Document Number <Doc>
Date: Saturday, January 09, 2021	Rev 0A

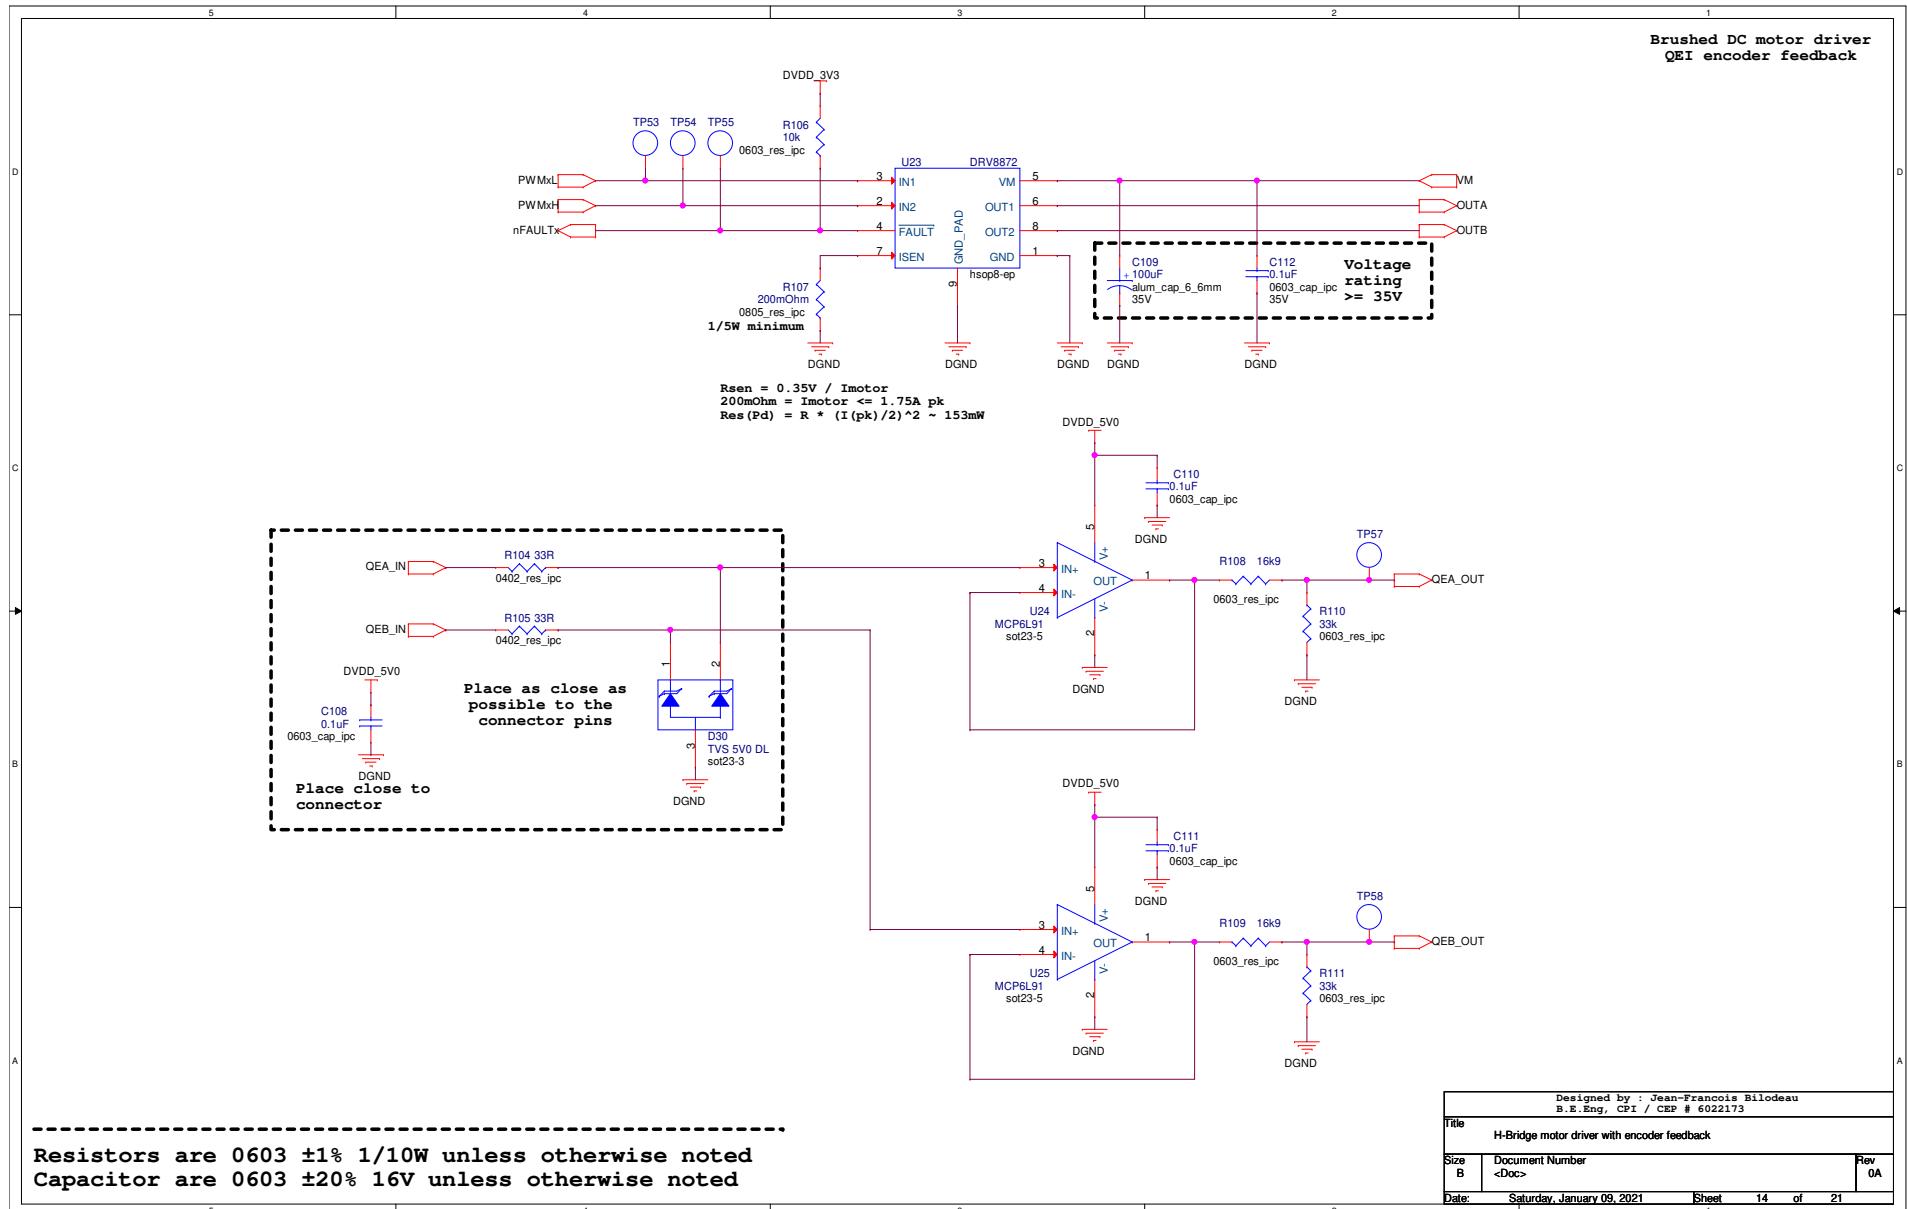

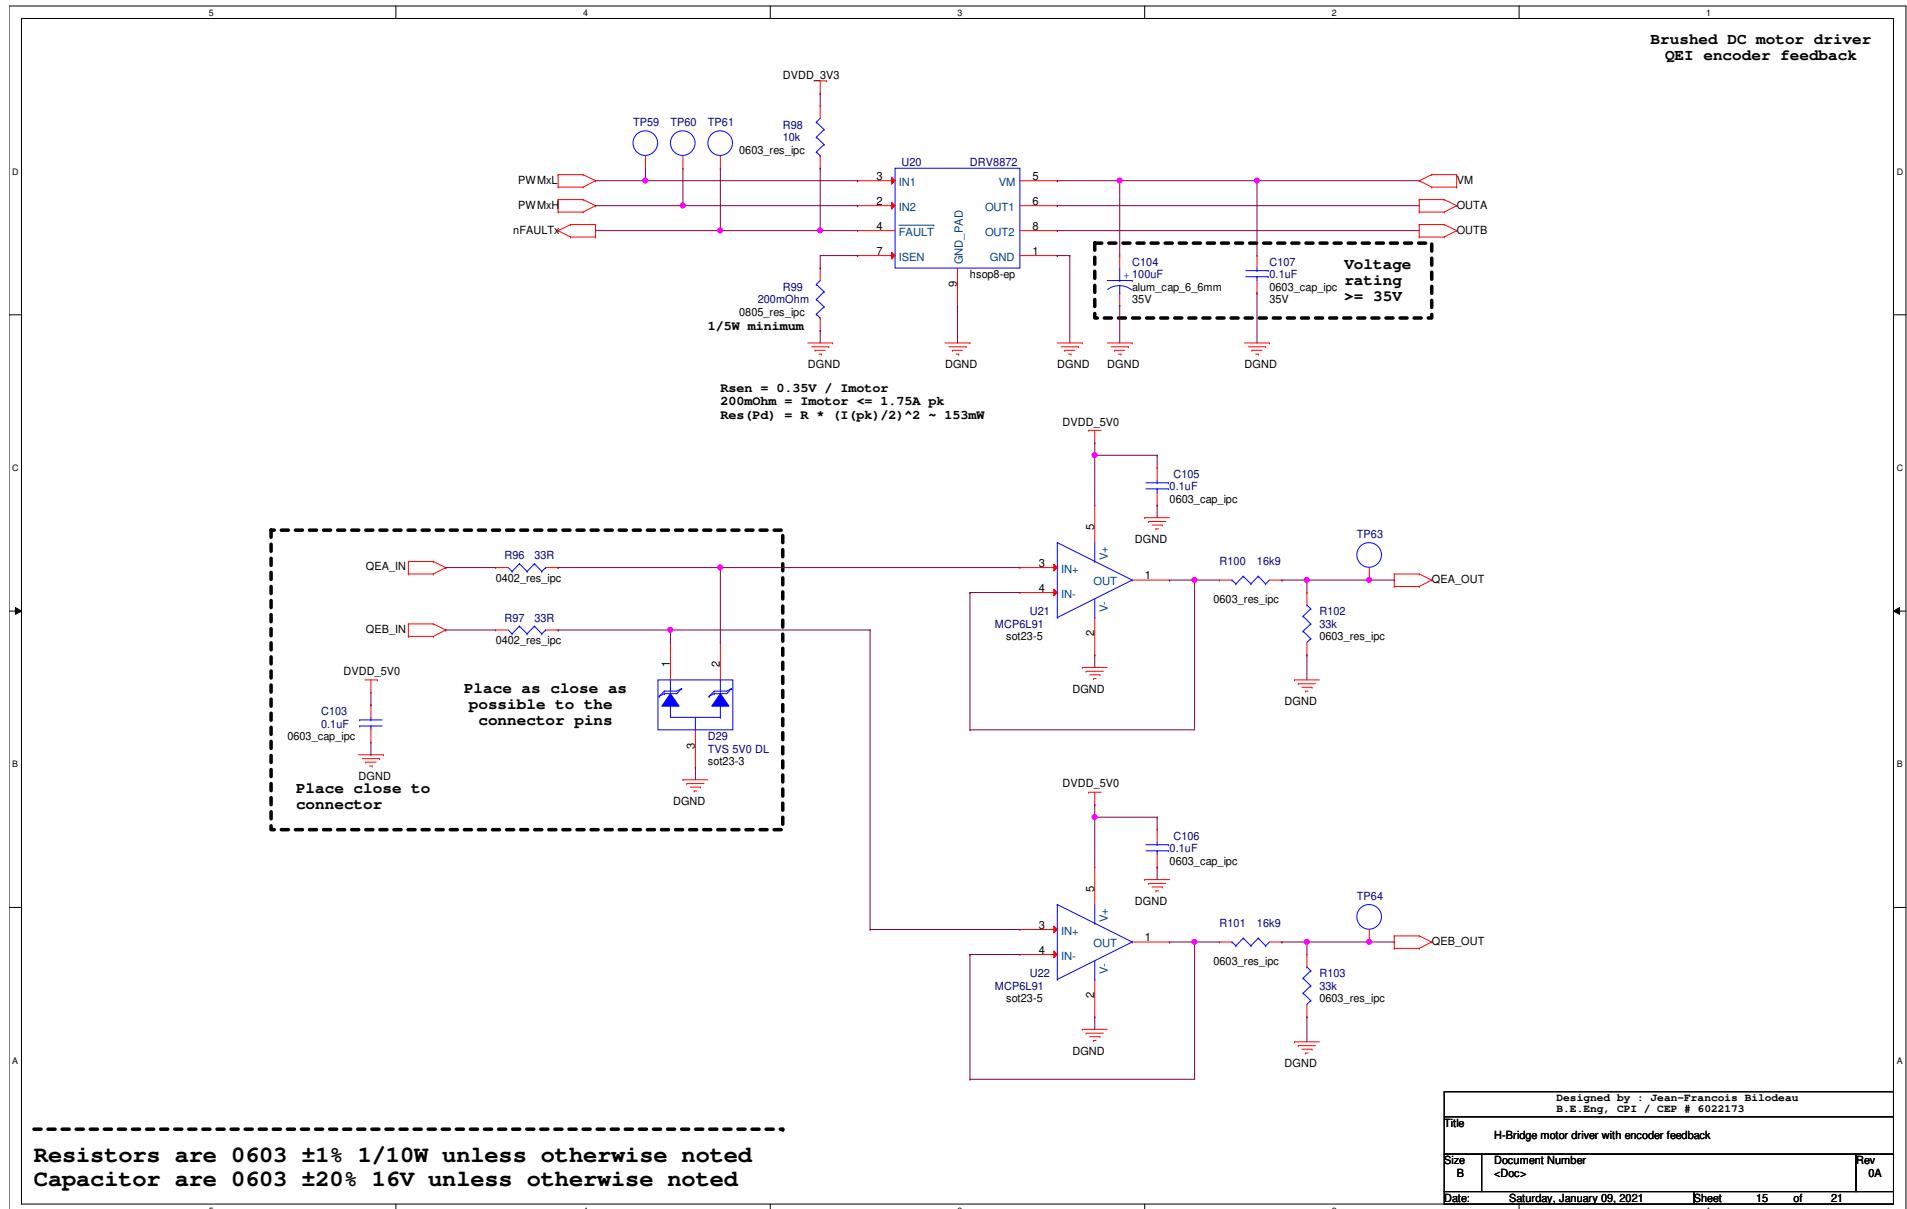

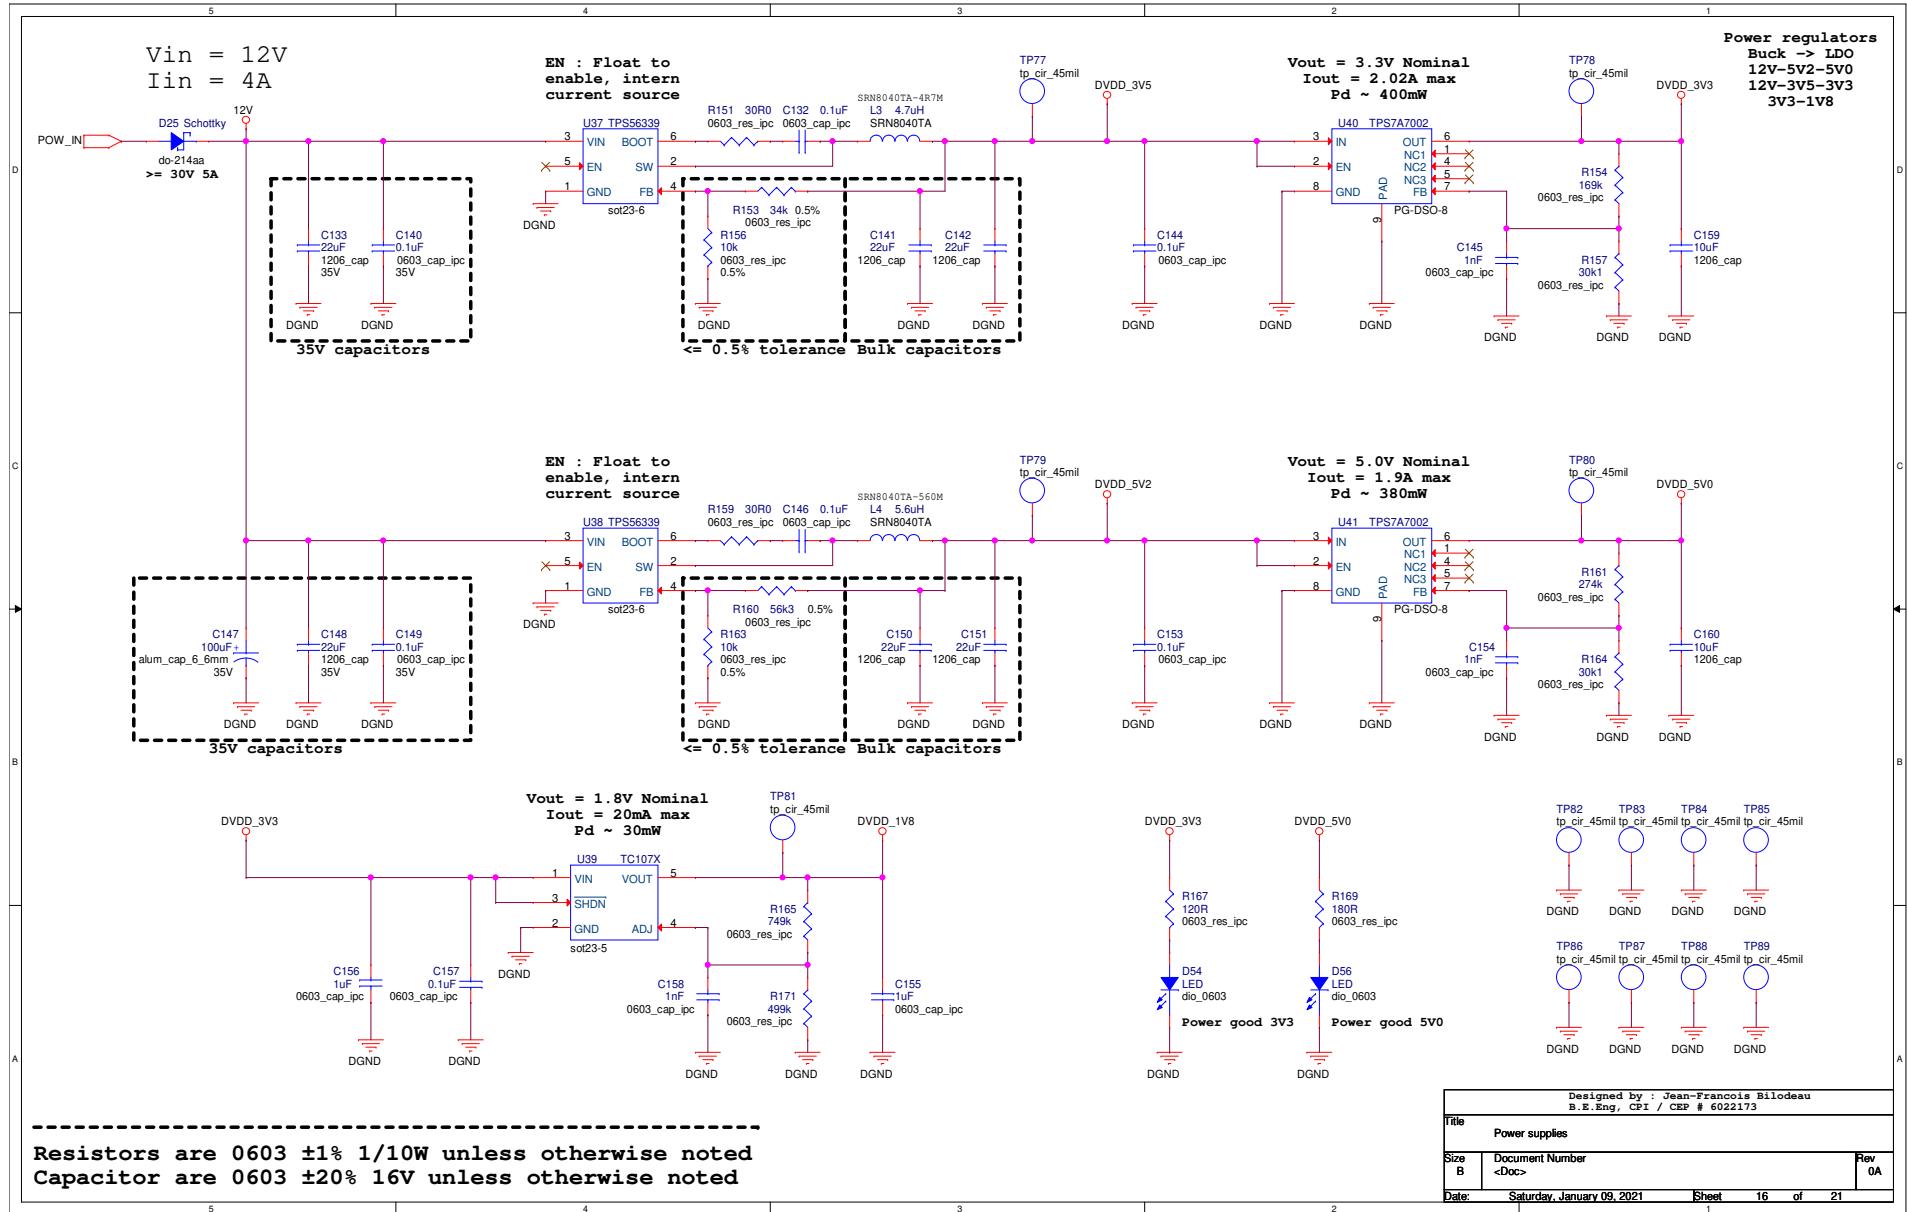

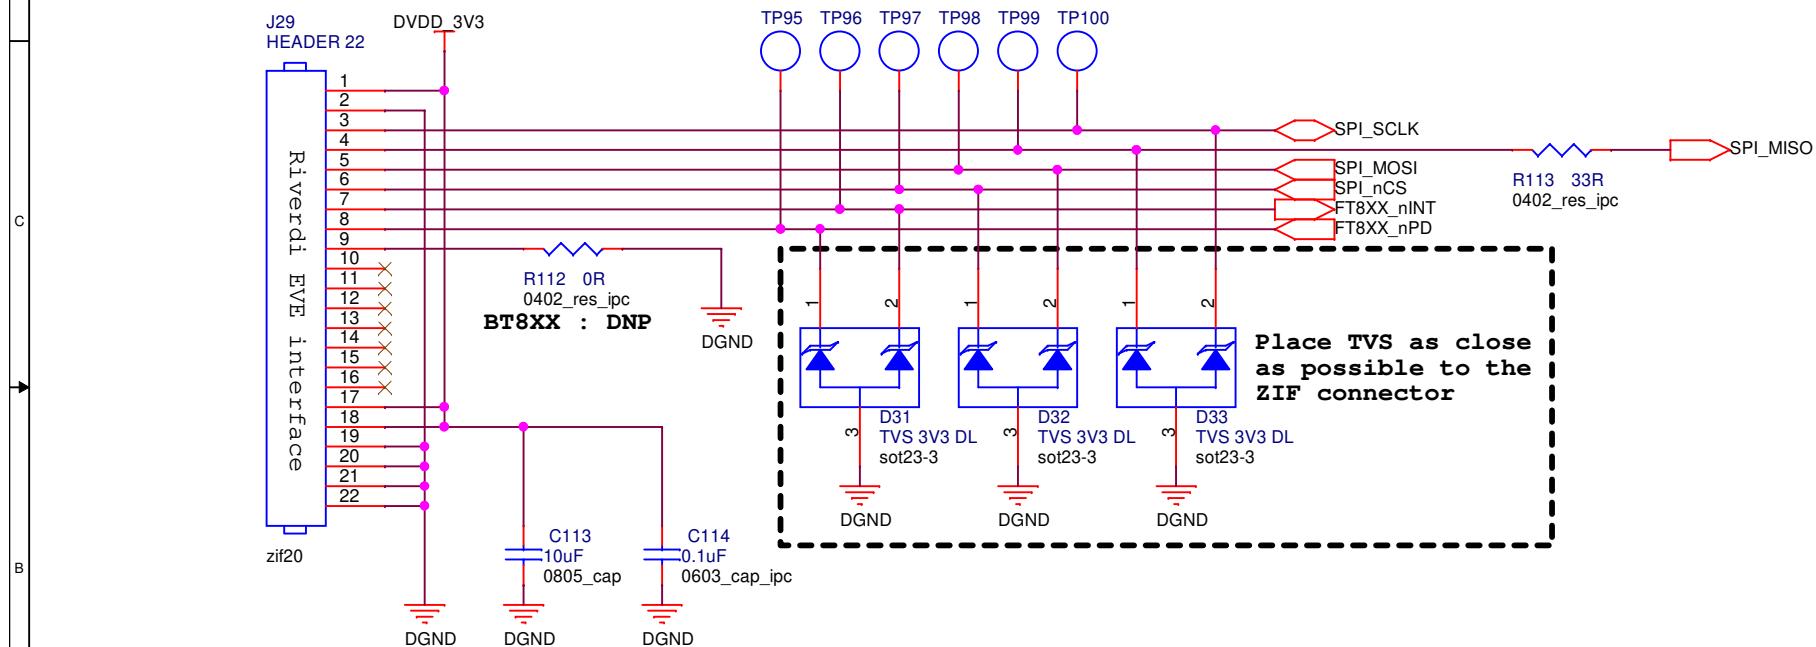

Resistors are 0603  $\pm 1\%$  1/10W unless otherwise noted  
Capacitor are 0603  $\pm 20\%$  16V unless otherwise noted

Designed by : Jean-Francois Bilodeau B.E.Eng, CPI / CEP # 6022173		
Title	Riverdi EVE LCD interface	
Size A	Document Number <Doc>	Rev 0A
Date: Saturday, January 09, 2021	Sheet 2	17 of 21

**RS485 bus interface**  
Max bitrate 550kbps

