



AVC-NF121F-HD **AI**

NDA
COMPLIANT

 | **CE** | **FC**


12MP H.265 FISHEYE NETWORK CAMERA

OVERVIEW

- 12MP (3536x3536) H.265+/H.265, H.264+/H.264, MJPEG
- Max. resolution: 3536x3536
- 2.0mm Fixed Lens
- 3D DNR, WDR, HLC, BLC
- 360° Fisheye Lens, Panoramic View, e-PTZ Function
- Supports Hardware Decoding
- Intelligent Analytics
- Smart IR Illumination Up to 32.8ft (10m)
- Built-in MIC / Speaker
- Built-in microSD card slot, up to 512GB
- IP66 ingress protection
- PoE / DC12V power supply
- Remote monitoring with mobile app and management software

DIMENSIONS

Unit : inch(mm)

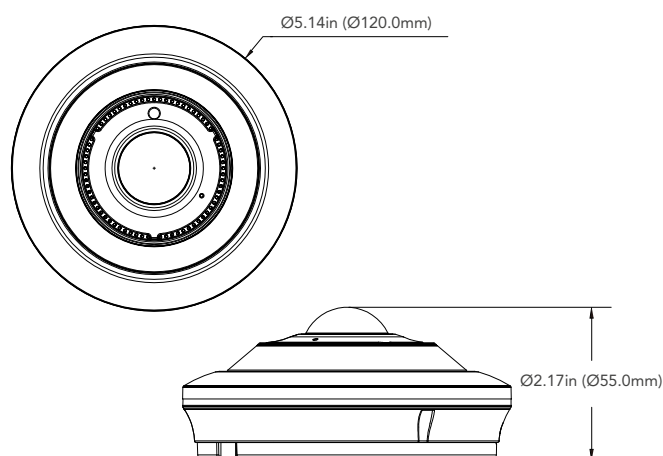

OPTIONAL ACCESSORIES



AVM-JB-F1
JUNCTION BOX



AVA-MICSPKSRN
AUDIBLE AND VISUAL
ALARM DEVICE

SPECIFICATIONS

VIDEO	
Image Sensor	1/1.6" Progressive CMOS
Max. Resolution	3536x3536
Main Stream Resolution	3536x3536, 3000x3000, 2560x2560, 2160x2160, 1520x1520, 1080x1080, 720x720
Sub Stream Resolution	1080x1080, 720x720, 480x480, 240x240
Mobile Stream Resolution	N/A
Max. Framerate	30fps/25fps (60Hz/50Hz)
Min. Illumination (Color)	0.009 lux @ F1.6 (AGC ON)
Min. Illumination (B/W)	0 lux @ IR ON
CODEC	
Video Compression	H.265/H.264/H.265+/H.264+/MJPEG
Audio Compression	G.711A/U
LENS	
Focal Length	2.0mm
Lens Type	Fixed
Angular Field of View	H: 180° (Wall Mount) H: 360° (Ceiling Mount)
Max. Aperture Ratio	F2.8
Min. Object Distance	4.9ft (1.5m)
DORI	
DORI	Wide: Detection 216.5ft (66m), Observation 86.6ft (26.4m), Recognition 43.3ft (13.2m), Identification 21.6ft (6.6m)
PAN / TILT / ROTATE	
Pan / Tilt / Rotate Range	Manual Adjustment
OPERATIONAL	
IR LED	3
White LED	N/A
Red / Blue LED	N/A
Light Viewable Length	IR: Up to 32.8ft (10m)
Image Mode	Image / Color / B&W Mode
Audio	Built-in MIC / Speaker
Alarm	1 x Input, 1 x Output
Wide Dynamic Range	120dB
Digital Noise Reduction	3D DNR
Analytics	Tripwire Detection, Tripwire Counting, Heat Map, Crowd Density Detection, Queue Length Detection, Rare Sound Detection, Loitering Detection, Region Entrance Detection, Region Exiting Detection
Active Deterrence	N/A
Camera Title	Up to 31 characters
Backlight Compensation	BLC, HLC, WDR
Motion Detection	Rectangle Grid (8 Levels of Sensitivity)
Privacy Masking	6 Rectangle Zones
Gain Control	Auto
White Balance	Auto/Manual
Electronic Shutter Speed	Auto / Manual (1/5 ~ 1/20000s)
Video Rotation	Flip, Corridor, Angle Adjustment
Alarm Triggers	Motion, Alarm, Sound Detection
Alarm Events	Siren, Event Push, E-mail Notification, Image file upload via FTP, Video file upload via FTP, Micro SD recording at event triggered
NETWORK	
Ethernet	RJ45(10/100BASE-T)
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP
Security	IP address filter, Password protection, Digest authentication, Complicated password, IEEE 802.1X authentication, WSSE for ONVIF, Brute-Force Defense, HTTPS TLS 1.2/1.3, SNMPv1.3, RTSP over HTTPS, Security audit log, Encrypted firmware, Host authentication (MAC-address), Auto logout, watermark, Secure boot
Bitrate Control	CBR (256Kbps ~ 16Mbps), VBR (256Kbps ~ 16Mbps)
Streaming	Unicast / Multicast
Application Programming Interface	ONVIF Profile S/G/T/M
GENERAL	
SD Card Slot	microSD slot, up to 512GB
Starllion Ready	Yes
Ingress Protection	IP66
Camera System	Network
Product Series	Diversity
Product Dimensions	5.14" × 2.17" (Ø120 × 55 mm)
Product Weight	0.88 lb (400 g)
Material	Metal
Color	White
Housing Style	Fisheye
ELECTRICAL & ENVIRONMENTAL	
Power Consumption	Max. 9.6 W
Power Input Voltage	PoE (IEEE 802.3af) / 12VDC
Operating Condition	-31°F to 140°F (-35°C to +60°C) / ≤ 90% RH
CERTIFICATION & STANDARDS	
NDAA Compliant	Yes
EMC	EN 55032:2015+A1:2020, EN 55035:2017+A11:2020, EN IEC 61000-3-2:2019+A2:2024, EN 61000-3-3:2013+A2:2021+AC:2022-01
Safety	CE: EN IEC 62368-1:2020+A11:2020, FCC: FCC Rules and Regulations Part 15 Subpart B
Environment	CE-RoHS:(EU) 2015/863, IEC60529, IEC60068-2-14