

58 / 61

CMS 매핑 필드 (유사 매칭 포함)

4

확인 필요 (추정·미매핑)

Category	Field (CMS)	Value
Video	Imaging Device	1/1.6" Progressive CMOS
Video	Max Resolution	3536×3536)
Video	Main Stream Resolution	3536×3536, 3000×3000, 2560×2560, 2160×2160, 1520×1520, 1080×1080, 720×720
Video	Sub Stream Resolution	1080×1080, 720×720, 480×480, 240×240
Video	Mobile Stream Resolution	N/A
Video	Max Framerate	30fps/25fps (60Hz/50Hz)
Video	Min. Illumination (Color)	0.009lux @ F1.6(AGC ON)
Video	Min. Illumination (B/W)	0 lux @ IR ON
Lens	Focal Length	2.0mm
Lens	Lens Type	Fixed
Lens	Angular Field of View	H: 180° (Wall Mount) H: 360° (Ceiling Mount)
Lens	Max. Aperture Ratio	F2.8
Lens	Min. Object Distance	4.9ft (1.5m)
Pan / Tilt / Rotate	Pan / Tilt / Rotate Range	Manual Adjustment
Operational	Day & Night	Image / Color / B&W Mode
Operational	Wide Dynamic Range	120dB
Operational	Digital Noise Reduction	3D DNR
Operational	Analytics	Tripwire Detection, Tripwire Counting, Heat Map, Crowd Density Detection, Queue Length Detection, Rare Sound Detection, Loitering Detection, Region Entrance Detection, Region Exiting Detection
Operational	Light Type	3
Operational	Active Deterrence	N/A
Operational	Camera Title	Up to 31 characters
Operational	Backlight Compensation	BLC, HLC, WDR
Operational	Motion Detection	Rectangle Grid (8 Levels of Sensitivity)
Operational	Privacy Masking	6 Rectangle Zones
Operational	Gain Control	Auto
Operational	White Balance	Auto/Manual
Operational	Electric Shutter Speed	Auto / Manual (1/5 ~ 1/20000s)
Operational	Video Rotation	Flip, Corridor, Angle Adjustment
Operational	Alarm Triggers	Motion, Alarm, Sound Detection

Category	Field (CMS)	Value
Operational	Alarm Events	Siren, Event Push, E-mail Notification, Image file upload via FTP, Video file upload via FTP, Micro SD recording at event triggered
Operational	Light Viewable Length	IR: Up to 32.8ft (10m)
Network	Ethernet	RJ45(10/100BASE-T)
Network	Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP,SMTP,NTP,UPnP,SNMP,HTTPS,FTP
Network	Bitrate Control	CBR (256Kbps ~ 16Mbps), VBR (256Kbps ~ 16Mbps)
Network	Streaming	Unicast / Multicast
Network	Application Programming Interface	ONVIF Profile S/G/T/M
Security	Additional Security 추정	IP address filter, Password protection, Digest authentication, Complicated password, IEEE 802.1X authentication, WSSE for ONVIF, Brute-Force Defense, HTTPS TLS 1.2/1.3, SNMPv1.3, RTSP over HTTPS, Security audit log, Encrypted firmware, Host authentication (MAC-address), Auto logout, watermark, Secure boot
General	SD Card Slot	micro SD slot, up to 512GB
General	Starllion Ready	Yes
General	Ingress Protection	IP66
General	Camera System	Network
General	Product Series	Diversity
General	Product Dimensions	5.14×2.17in (Ø120 x 55mm)
General	Product Weight	0.88lb (400g)
General	Material	Metal
General	Color	White
Mechanical	Housing Style	Bullet
DORI	Detect (25PPM/ 8PPF)	Wide: Detection 216.5ft (66m), Observation 86.6ft (26.4m), Recognition 43.3ft (13.2m), Idetification 21.6ft (6.6m)
Interface	Alarm Input	1 x Input, 1 x Output
Interface	Audio Input	Built-in MIC / Speaker
Electrical & Environmental	Power Consumption	Max. 9.6W
Electrical & Environmental	Operating Temperature	-31°F to 140°F (-35°C to +60°C), Humidity: less than ≤ 90% RH
Electrical & Environmental	Power Input Voltage	PoE (IEEE802.3af) / DC 12V
Certification & Standards	NDAA Compliant	Yes
Certification & Standards	EMC	EN 55032:2015+A1:2020, EN 55035:2017+A11:2020, EN IEC 61000-3-2:2019+A2:2024, EN 61000-3-3:2013+A2:2021+AC:2022-01
Certification & Standards	Safety	CE: EN IEC 62368-1:2020+A11:2020 FCC: FCC Rules and Regulations Part 15 Subpart B
Performance	Video Compression	H.265/H.264/H.265+/H.264+/MJPEG
Performance	Audio Compression	G.711A/U

완전 일치가 아니라 유사 항목으로 자동 추정한 필드와, 대응 항목을 찾지 못한 필드입니다. 편집기에서 확인·수정하세요.

Security → Additional Security IP address filter, Password protection, Digest authentication, Complicated password,	추정 매핑
White LED → IR Wavelength N/A	추천 있음
Red / Blue LED → Defog N/A	추천 있음
Environment → EMC CE-RoHS:(EU) 2015/863, IEC60529, IEC60068-2-14	추천 있음

35 검출

16 반영

4 표준

19 표기

7 단위

4 오타

1 문법

Field	유형	수정 내용	변경 (전 → 후)
Overview	표준	microSD 표준 표기 (한 단어)	micro SD → microSD
Overview	표기	전압 표기 통일 (DC 12V → 12VDC)	DC12V → 12VDC
Max. Resolution	표기	짝 없는 닫는 괄호 제거	...) → ...
Min. Illumination (Color)	단위	lux·@ 사이 공백	9lux @ F1.6 → 9 lux @ F1.6
Focal Length	표기	앞뒤 공백·탭 제거	...(공백/탭) → 정리됨
DORI	오타	오타 수정	Idetification → Identification
Image Mode	표기	앞뒤 공백·탭 제거	...(공백/탭) → 정리됨
Alarm Events	표준	microSD 표준 표기 (한 단어)	Micro SD → microSD
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Protocol	표기	심표 뒤 공백	, → ,
Security	오타	오타 수정	authentication → authentication
Security	오타	오타 수정	authentication → authentication
Security	오타	오타 수정	authentication → authentication
SD Card Slot	표준	microSD 표준 표기 (한 단어)	micro SD → microSD
Camera System	표기	앞뒤 공백·탭 제거	...(공백/탭) → 정리됨
Product Dimensions	단위	치수 기호·단위 정리 (× / mm)	4×2 → 4 × 2
Product Dimensions	단위	치수 기호·단위 정리 (× / mm)	0 x 5 → 0 × 5
Product Dimensions	단위	치수 기호·단위 정리 (× / mm)	5mm → 5 mm
Product Dimensions	표기	앞뒤 공백·탭 제거	...(공백/탭) → 정리됨
Product Weight	단위	수치·단위 사이 공백	8lb → 8 lb
Product Weight	단위	수치·단위 사이 공백 (g)	0g → 0 g
Product Weight	표기	앞뒤 공백·탭 제거	...(공백/탭) → 정리됨
Power Consumption	단위	수치·단위 사이 공백 (W)	6W → 6 W
Power Input Voltage	표준	IEEE 표준번호 띄어쓰기	IEEE802.3 → IEEE 802.3
Power Input Voltage	표기	전압 표기 통일 (DC 12V → 12VDC)	DC 12V → 12VDC
Operating Condition	문법	'less than ≤' 중복 제거	less than ≤ → ≤

35검출

16반영

4표준

19표기

7단위

4오타

1문법

Field	수정 전	수정 후	반영
Overview	• 12MP (3536×3536) H.265+/H.265, H.264+/H.264, MJPEG • Max. resolution: 3536×3536 • 2.0mm Fixed Lens • 3D DNR, WDR, HLC, BLC • 360° Fisheye Lens, Panoramic View, e-PTZ Function • Intelligent Analytics • Smart IR Illumination Up to 32.8ft (10m) • Built-in MIC / Speaker • Built-in micro SD card slot, up to 512GB • IP66 ingress protection • PoE / DC12V power supply • Remote monitoring with mobile app and management software	• 12MP (3536×3536) H.265+/H.265, H.264+/H.264, MJPEG • Max. resolution: 3536×3536 • 2.0mm Fixed Lens • 3D DNR, WDR, HLC, BLC • 360° Fisheye Lens, Panoramic View, e-PTZ Function • Intelligent Analytics • Smart IR Illumination Up to 32.8ft (10m) • Built-in MIC / Speaker • Built-in microSD card slot, up to 512GB • IP66 ingress protection • PoE / 12VDC power supply • Remote monitoring with mobile app and management software	반영
Max. Resolution	3536×3536)	3536×3536	반영
Min. Illumination (Color)	0.009lux @ F1.6(AGC ON)	0.009 lux @ F1.6(AGC ON)	반영
Focal Length	2.0mm	2.0mm	반영
DORI	Wide: Detection 216.5ft (66m), Observation 86.6ft (26.4m), Recognition 43.3ft (13.2m), Idetification 21.6ft (6.6m)	Wide: Detection 216.5ft (66m), Observation 86.6ft (26.4m), Recognition 43.3ft (13.2m), Identification 21.6ft (6.6m)	반영
Image Mode	Image / Color / B&W Mode	Image / Color / B&W Mode	반영
Alarm Events	Siren, Event Push, E-mail Notification, Image file upload via FTP, Video file upload via FTP, Micro SD recording at event triggered	Siren, Event Push, E-mail Notification, Image file upload via FTP, Video file upload via FTP, microSD recording at event triggered	반영
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP,SMTP,NTP,UPnP,SNMP,HTTPS,FTP	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP	반영
Security	IP address filter, Password protection, Digest authentication, Complicated password, IEEE 802.1X authentication, WSSE for ONVIF, Brute-Force Defense, HTTPS TLS 1.2/1.3, SNMPv1.3, RTSP over HTTPS, Security audit log, Encrypted firmware, Host authentication (MAC-address), Auto logout, watermark, Secure boot	IP address filter, Password protection, Digest authentication, Complicated password, IEEE 802.1X authentication, WSSE for ONVIF, Brute-Force Defense, HTTPS TLS 1.2/1.3, SNMPv1.3, RTSP over HTTPS, Security audit log, Encrypted firmware, Host authentication (MAC-address), Auto logout, watermark, Secure boot	반영
SD Card Slot	micro SD slot, up to 512GB	microSD slot, up to 512GB	반영
Camera System	Network	Network	반영
Product Dimensions	5.14×2.17in (Ø120 x 55mm)	5.14 × 2.17in (Ø120 × 55 mm)	반영
Product Weight	0.88lb (400g)	0.88 lb (400 g)	반영
Power Consumption	Max. 9.6W	Max. 9.6 W	반영
Power Input Voltage	PoE (IEEE802.3af) / DC 12V	PoE (IEEE 802.3af) / 12VDC	반영
Operating Condition	-31°F to 140°F (-35°C to +60°C), Humidity: less than ≤ 90% RH	-31°F to 140°F (-35°C to +60°C), Humidity: ≤ 90% RH	반영



AVC-NF121F-HD

NDAA COMPLIANT | CE | FCC


12MP H.265 FISHEYE NETWORK CAMERA
360° Fisheye · Panoramic View

OVERVIEW

- 12MP (3536x3536) H.265+/H.265, H.264+/H.264, MJPEG
- Max. resolution: 3536x3536
- 2.0mm Fixed Lens
- 3D DNR, WDR, HLC, BLC
- 360° Fisheye Lens, Panoramic View, e-PTZ Function
- Intelligent Analytics
- Smart IR Illumination Up to 32.8ft (10m)
- Built-in MIC / Speaker
- Built-in microSD card slot, up to 512GB
- IP66 ingress protection
- PoE / 12VDC power supply
- Remote monitoring with mobile app and management software

DIMENSIONS

Unit : inch(mm)

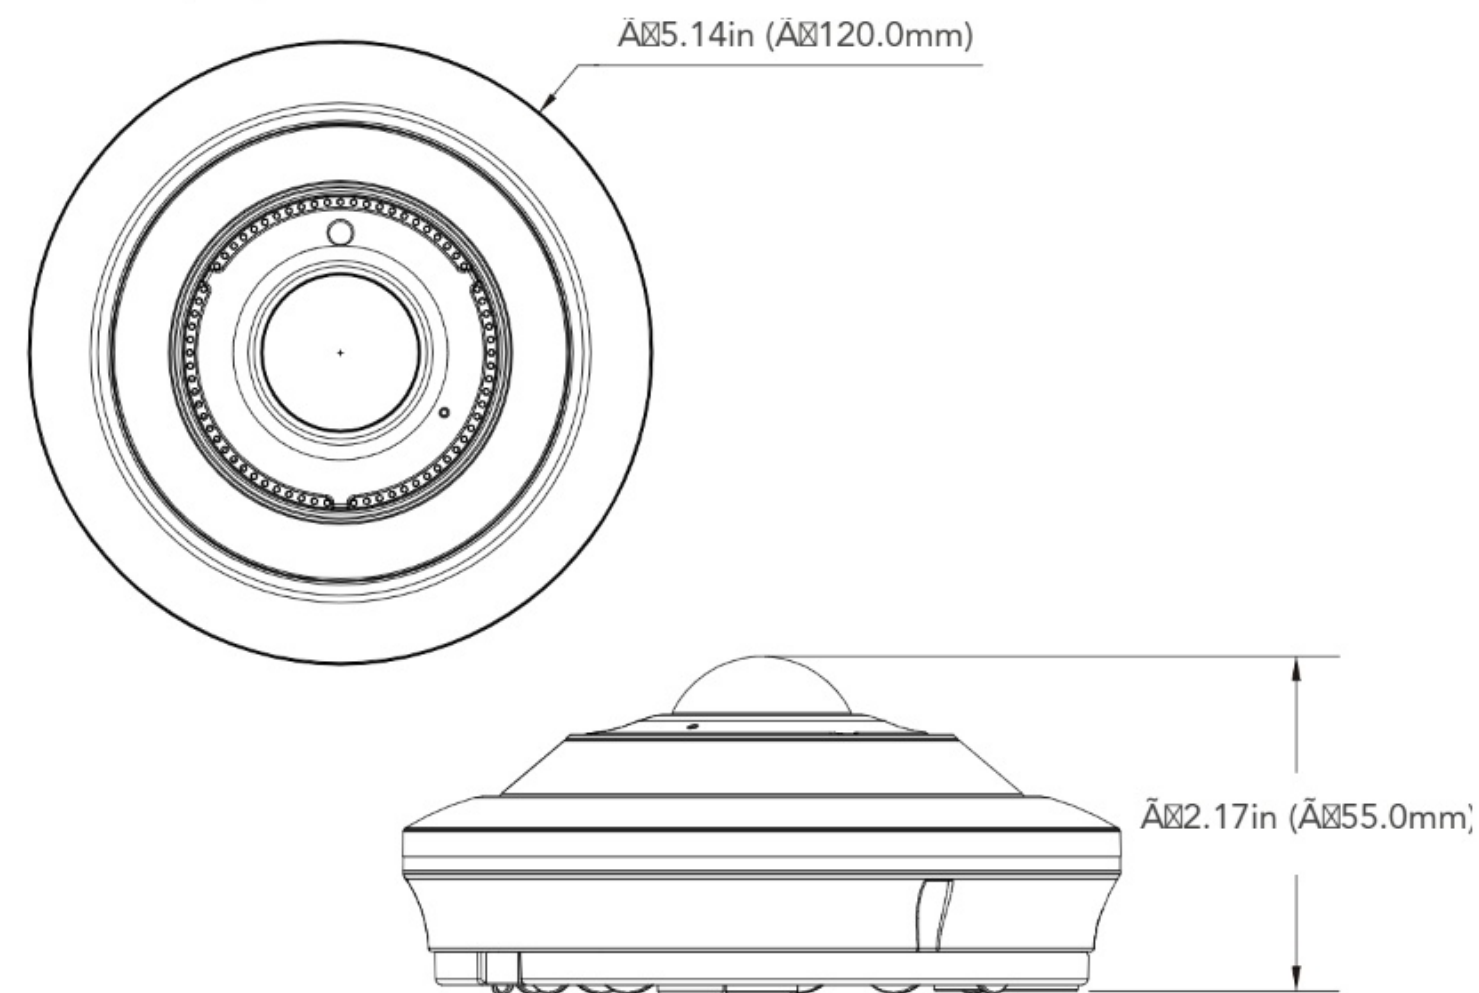

OPTIONAL ACCESSORIES



SPECIFICATIONS (1 / 2)

VIDEO	
Imaging Device	1/1.6" Progressive CMOS
Max Resolution	3536x3536
Main Stream Resolution	3536x3536, 3000x3000, 2560x2560, 2160x2160, 1520x1520, 1080x1080, 720x720
Sub Stream Resolution	1080x1080, 720x720, 480x480, 240x240
Mobile Stream Resolution	N/A
Max Framerate	30fps/25fps (60Hz/50Hz)
Min. Illumination (Color)	0.009 lux @ F1.6(AGC ON)
Min. Illumination (B/W)	0 lux @ IR ON
LENS	
Focal Length	2.0mm
Lens Type	Fixed
Angular Field of View	H: 180° (Wall Mount) H: 360° (Ceiling Mount)
Max. Aperture Ratio	F2.8
Min. Object Distance	4.9ft (1.5m)
PAN / TILT / ROTATE	
Pan / Tilt / Rotate Range	Manual Adjustment
OPERATIONAL	
Day & Night	Image / Color / B&W Mode
Wide Dynamic Range	120dB
Digital Noise Reduction	3D DNR
Analytics	Tripwire Detection, Tripwire Counting, Heat Map, Crowd Density Detection, Queue Length Detection, Rare Sound Detection, Loitering Detection, Region Entrance Detection, Region Exiting Detection
Light Type	3
Active Deterrence	N/A
Camera Title	Up to 31 characters
Backlight Compensation	BLC, HLC, WDR
Motion Detection	Rectangle Grid (8 Levels of Sensitivity)
Privacy Masking	6 Rectangle Zones
Gain Control	Auto
White Balance	Auto/Manual
Electric Shutter Speed	Auto / Manual (1/5 ~ 1/20000s)
Video Rotation	Flip, Corridor, Angle Adjustment
Alarm Triggers	Motion, Alarm, Sound Detection
Alarm Events	Siren, Event Push, E-mail Notification, Image file upload via FTP, Video file upload via FTP, microSD recording at event triggered
Light Viewable Length	IR: Up to 32.8ft (10m)
NETWORK	
Ethernet	RJ45(10/100BASE-T)
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP
Bitrate Control	CBR (256Kbps ~ 16Mbps), VBR (256Kbps ~ 16Mbps)
Streaming	Unicast / Multicast
Application Programming Interface	ONVIF Profile S/G/T/M

SPECIFICATIONS

(2 / 2)

SECURITY	
Additional Security	IP address filter, Password protection, Digest authentication, Complicated password, IEEE 802.1X authentication, WSSE for ONVIF, Brute-Force Defense, HTTPS TLS 1.2/1.3, SNMPv1.3, RTSP over HTTPS, Security audit log, Encrypted firmware, Host authentication (MAC-address), Auto logout, watermark, Secure boot
GENERAL	
SD Card Slot	microSD slot, up to 512GB
Starllion Ready	Yes
Ingress Protection	IP66
Camera System	Network
Product Series	Diversity
Product Dimensions	5.14 × 2.17in (Ø120 × 55 mm)
Product Weight	0.88 lb (400 g)
Material	Metal
Color	White
MECHANICAL	
Housing Style	Bullet
DORI	
Detect (25PPM/ 8PPF)	Wide: Detection 216.5ft (66m), Observation 86.6ft (26.4m), Recognition 43.3ft (13.2m), Identification 21.6ft (6.6m)
INTERFACE	
Alarm Input	1 x Input, 1 x Output
Audio Input	Built-in MIC / Speaker
ELECTRICAL & ENVIRONMENTAL	
Power Consumption	Max. 9.6 W
Operating Temperature	-31°F to 140°F (-35°C to +60°C), Humidity: ≤ 90% RH
Power Input Voltage	PoE (IEEE 802.3af) / 12VDC
CERTIFICATION & STANDARDS	
NDAA Compliant	Yes
EMC	EN 55032:2015+A1:2020, EN 55035:2017+A11:2020, EN IEC 61000-3-2:2019+A2:2024, EN 61000-3-3:2013+A2:2021+AC:2022-01
Safety	CE: EN IEC 62368-1:2020+A11:2020 FCC: FCC Rules and Regulations Part 15 Subpart B
PERFORMANCE	
Video Compression	H.265/H.264/H.265+/H.264+/MJPEG
Audio Compression	G.711A/U



AVC-NF121F-HD

NDAA COMPLIANT | CE | FCC


12MP H.265 FISHEYE NETWORK CAMERA
360° Fisheye · Panoramic View

OVERVIEW

- 12MP (3536x3536) H.265+/H.265, H.264+/H.264, MJPEG
- Max. resolution: 3536x3536
- 2.0mm Fixed Lens
- 3D DNR, WDR, HLC, BLC
- 360° Fisheye Lens, Panoramic View, e-PTZ Function
- Intelligent Analytics
- Smart IR Illumination Up to 32.8ft (10m)
- Built-in MIC / Speaker
- Built-in microSD card slot, up to 512GB
- IP66 ingress protection
- PoE / 12VDC power supply
- Remote monitoring with mobile app and management software

DIMENSIONS

Unit : inch(mm)

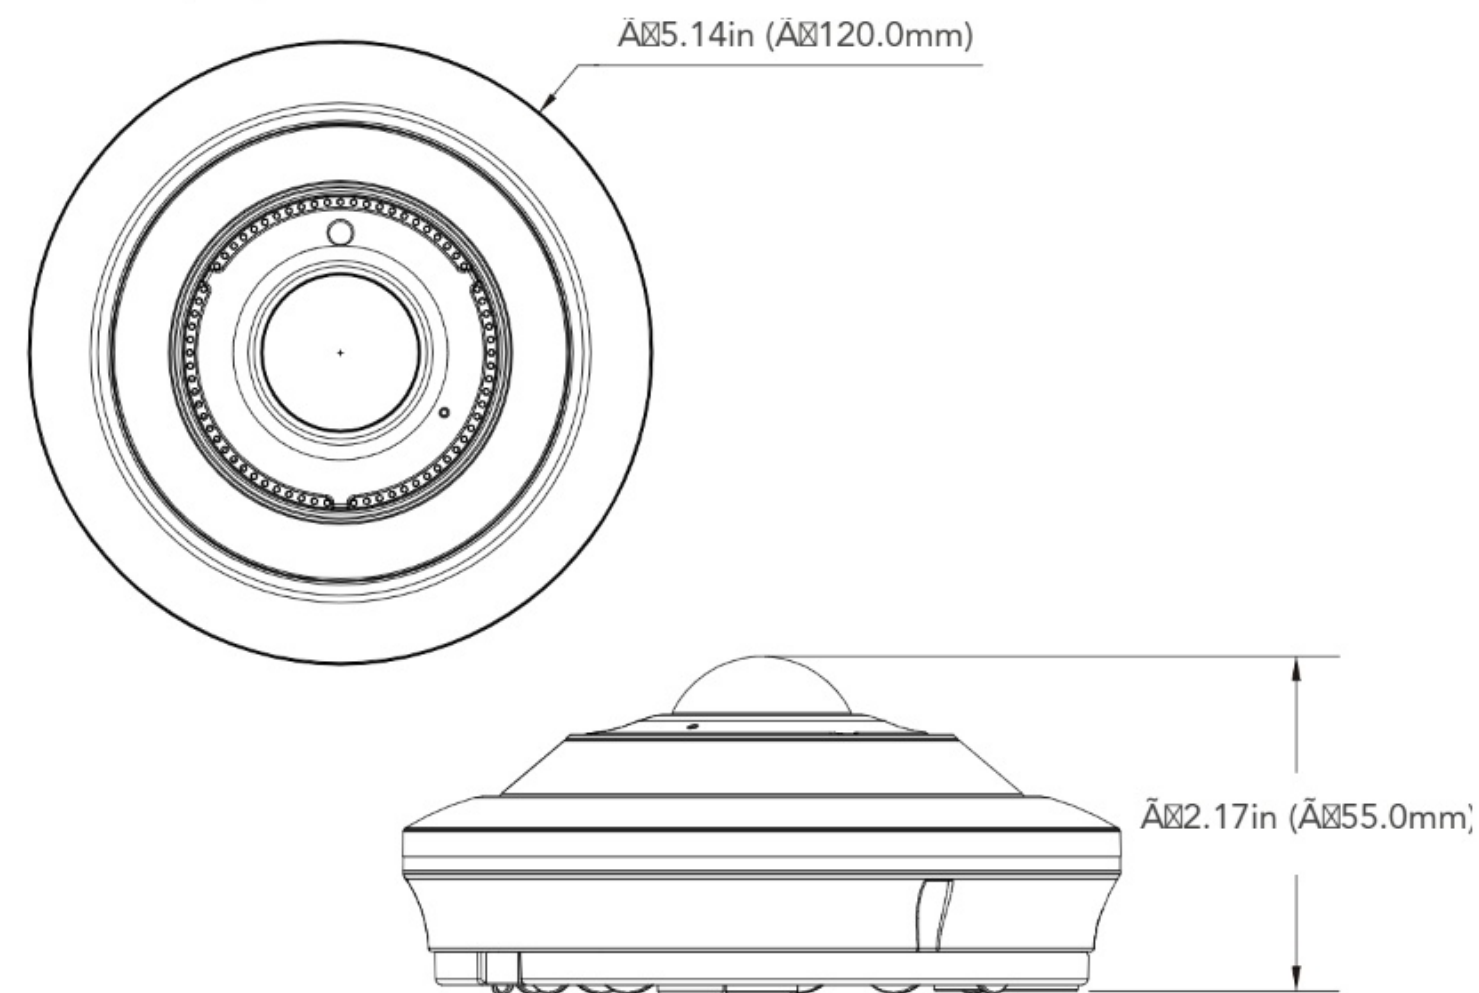

OPTIONAL ACCESSORIES



SPECIFICATIONS

(1 / 2)

VIDEO	
Image Sensor	1/1.6" Progressive CMOS
Max. Resolution	3536x3536)
Main Stream Resolution	3536x3536, 3000x3000, 2560x2560, 2160x2160, 1520x1520, 1080x1080, 720x720
Sub Stream Resolution	1080x1080, 720x720, 480x480, 240x240
Mobile Stream Resolution	N/A
Max. Framerate	30fps/25fps (60Hz/50Hz)
Min. Illumination (Color)	0.009lux @ F1.6(AGC ON)
Min. Illumination (B/W)	0 lux @ IR ON
CODEC	
Video Compression	H.265/H.264/H.265+/H.264+/MJPEG
Audio Compression	G.711A/U
LENS	
Focal Length	2.0mm
Lens Type	Fixed
Angular Field of View	H: 180° (Wall Mount) H: 360° (Ceiling Mount)
Max. Aperture Ratio	F2.8
Min. Object Distance	4.9ft (1.5m)
DORI	
DORI	Wide: Detection 216.5ft (66m), Observation 86.6ft (26.4m), Recognition 43.3ft (13.2m), Identification 21.6ft (6.6m)
PAN / TILT / ROTATE	
Pan / Tilt / Rotate Range	Manual Adjustment
OPERATIONAL	
IR LED	3
White LED	N/A
Red / Blue LED	N/A
Light Viewable Length	IR: Up to 32.8ft (10m)
Image Mode	Image / Color / B&W Mode
Audio	Built-in MIC / Speaker
Alarm	1 x Input, 1 x Output
Wide Dynamic Range	120dB
Digital Noise Reduction	3D DNR
Analytics	Tripwire Detection, Tripwire Counting, Heat Map, Crowd Density Detection, Queue Length Detection, Rare Sound Detection, Loitering Detection, Region Entrance Detection, Region Exiting Detection
Active Deterrence	N/A
Camera Title	Up to 31 characters
Backlight Compensation	BLC, HLC, WDR
Motion Detection	Rectangle Grid (8 Levels of Sensitivity)
Privacy Masking	6 Rectangle Zones
Gain Control	Auto
White Balance	Auto/Manual
Electronic Shutter Speed	Auto / Manual (1/5 ~ 1/20000s)
Video Rotation	Flip, Corridor, Angle Adjustment
Alarm Triggers	Motion, Alarm, Sound Detection

SPECIFICATIONS

(2 / 2)

OPERATIONAL	
Alarm Events	Siren, Event Push, E-mail Notification, Image file upload via FTP, Video file upload via FTP, Micro SD recording at event triggered
NETWORK	
Ethernet	RJ45(10/100BASE-T)
Protocol	TCP/IP,HTTP,DHCP,DNS,DDNS,RTP/RTSP,SMTP,NTP,UPnP,SNMP,HTTPS,FTP
Security	IP address filter, Password protection, Digest authentication, Complicated password, IEEE 802.1X authentication, WSSE for ONVIF, Brute-Force Defense, HTTPS TLS 1.2/1.3, SNMPv1.3, RTSP over HTTPS, Security audit log, Encrypted firmware, Host authentication (MAC-address), Auto logout, watermark, Secure boot
Bitrate Control	CBR (256Kbps ~ 16Mbps), VBR (256Kbps ~ 16Mbps)
Streaming	Unicast / Multicast
Application Programming Interface	ONVIF Profile S/G/T/M
GENERAL	
SD Card Slot	micro SD slot, up to 512GB
Starllion Ready	Yes
Ingress Protection	IP66
Camera System	Network
Product Series	Diversity
Product Dimensions	5.14x2.17in (Ø120 x 55mm)
Product Weight	0.88lb (400g)
Material	Metal
Color	White
Housing Style	Bullet
ELECTRICAL & ENVIRONMENTAL	
Power Consumption	Max. 9.6W
Power Input Voltage	PoE (IEEE802.3af) / DC 12V
Operating Condition	-31°F to 140°F (-35°C to +60°C), Humidity: less than ≤ 90% RH
CERTIFICATION & STANDARDS	
NDAA Compliant	Yes
EMC	EN 55032:2015+A1:2020, EN 55035:2017+A11:2020, EN IEC 61000-3-2:2019+A2:2024, EN 61000-3-3:2013+A2:2021+AC:2022-01
Safety	CE: EN IEC 62368-1:2020+A11:2020 FCC: FCC Rules and Regulations Part 15 Subpart B
Environment	CE-RoHS:(EU) 2015/863, IEC60529, IEC60068-2-14