ROB311 Quiz 2

Hanhee Lee

March 26, 2025

Contents

1 Bode Plots **2**
- 1.1 Bode Plots . . . 2
  - 1.1.1 Constant Gain . . . 2
  - 1.1.2 Pole or Zero at $\omega = 0$ . . . 2
  - 1.1.3 Non-Zero Pole or Zero . . . 2
  - 1.1.4 Complex Conjugate Poles . . . 2
- 1.2 Robustness Margins . . . 2
  - 1.2.1 Gain Margin . . . 2
  - 1.2.2 Phase Margin . . . 2

2 Robustness Margins **3**

3 Root Locus, Bode, and Nyquist **4**

4 Control Design in the Frequency Domain **4**
- 4.1 Goal . . . 4
- 4.2 Proportional Derivative (PD) Controller . . . 4
  - 4.2.1 Bode Plot . . . 4
- 4.3 Proportional Integral (PI) Controller . . . 5
  - 4.3.1 Bode Plot . . . 5
  - 4.3.2 Design Procedure . . . 5
- 4.4 Proportional Integral Derivative (PID) Controller . . . 5
- 4.5 Examples . . . 5

1 Bode Plots

1.1 Bode Plots

Process:

1.1.1 Constant Gain

1.1.2 Pole or Zero at $\omega = 0$

1.1.3 Non-Zero Pole or Zero

1.1.4 Complex Conjugate Poles

1.2 Robustness Margins

Motivation: Approximate the GM and PM from the Bode plot:

- $L(s)$ is a strictly proper rational fn.
- $L(s)$ has no poles in $\mathbb{C}^+$ (no open loop variable poles)

1.2.1 Gain Margin

Definition:

$$|L(j\omega_{gc}) = 1| \iff |L(j\omega_{gc})|_{dB} = 0$$

1.2.2 Phase Margin

Definition:

$$|L(j\omega_{gc})| = 1 \implies |L(j\omega_{gc})|_{dB} = 0$$

2 Robustness Margins

3 Root Locus, Bode, and Nyquist

4 Control Design in the Frequency Domain

4.1 Goal

Motivation:

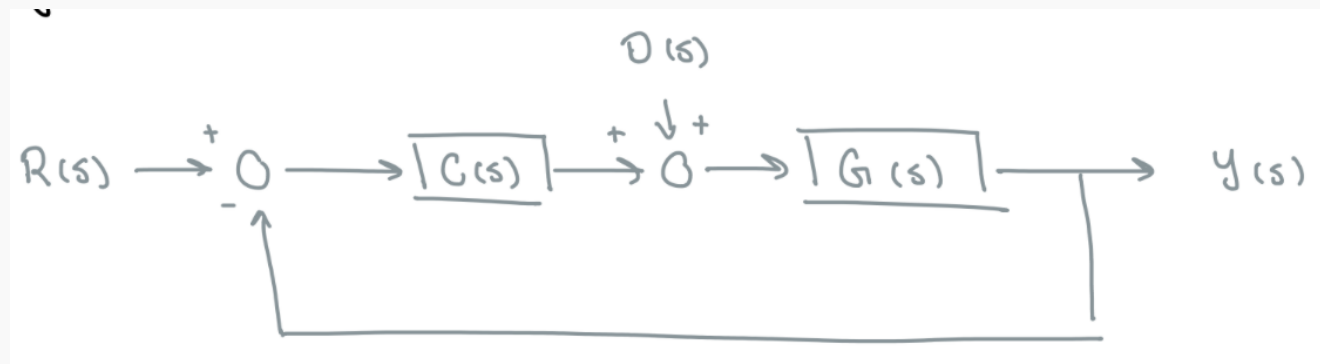

Figure 1

Design $C(s)$ so that the feedback loop:

- BIBO Stable: Verify using Nyquist criterion
  - roots$(1 + C(s)P(s)) \subseteq \mathbb{C}^-$
  - $C(s)G(s)$ has no pole-zero cancellations in $\overline{\mathbb{C}^+}$
- Satisfies certain performance specifications: Tune using Bode plots

4.2 Proportional Derivative (PD) Controller

Motivation: Increase PM at higher frequencies.

Definition:

$$C(s) = K(T_D s + 1) \tag{1}$$

- $K, T_D > 0$

Since $U(s) = C(s)E(s)$,

$$u(t) = \underbrace{KT_D e(t)}_{D} + \underbrace{Ke(t)}_{P} \tag{2}$$

4.2.1 Bode Plot

Notes:

$$|C(j\omega)|_{\text{dB}} = 20 \log |K| + 20 \log |j\omega T_D + 1|$$
$$\angle C(j\omega) = \angle K + \angle(j\omega T_D + 1)$$

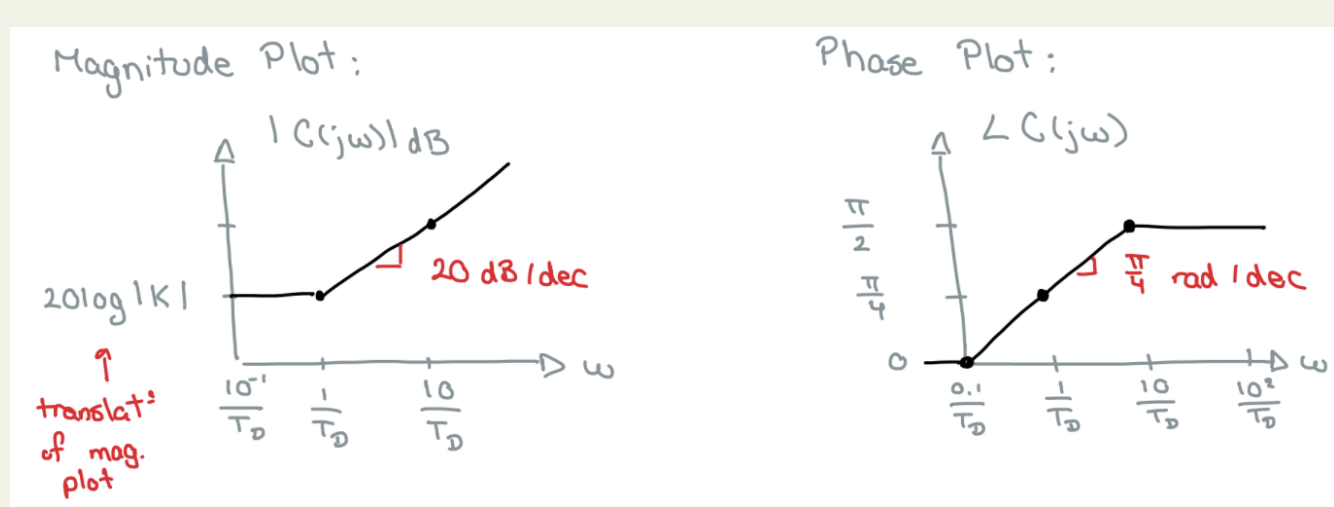

Figure 2

4.3 Proportional Integral (PI) Controller

Motivation:

Definition:

$$C(s) = K\left(1 + \frac{1}{T_I s}\right) = K\frac{T_I s + 1}{T_I s} \tag{3}$$

- $K, T_I > 0$

Since $U(s) = C(s)E(s)$,

$$u(t) = \underbrace{Ke(t)}_{P} + \underbrace{\frac{K}{T_I}\int_0^t e(\tau)d\tau}_{I} \tag{4}$$

4.3.1 Bode Plot

Notes:

$$|C(j\omega)|_{\text{dB}} = 20\log|K| + 20\log|j\omega T_I + 1|$$

$$\angle C(j\omega) = \angle K + \angle(j\omega T_I + 1)$$

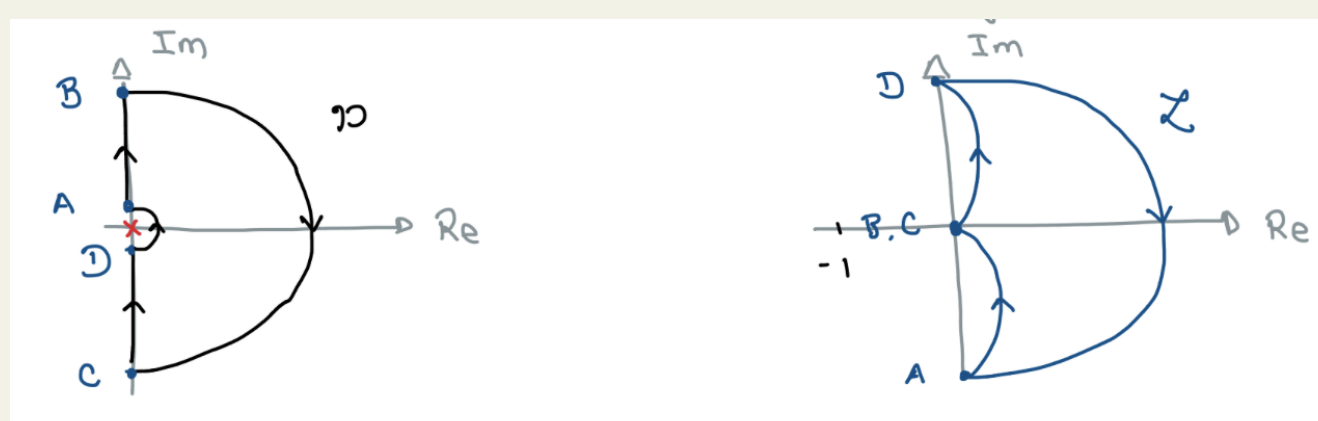

Figure 3

4.3.2 Design Procedure

4.4 Proportional Integral Derivative (PID) Controller

Definition:

$$C(s) = K(T_D s + 1)\left(1 + \frac{1}{T_I s}\right) = K_p + \frac{K_I}{s} + K_D s \tag{5}$$

- $K, T_I, T_D > 0$

4.5 Examples

Example:

1. **Given:** $G(s) = \dfrac{1}{j\omega(j\omega + 1)}$, $C(s) = K(T_D s + 1)$
2. **Problem:** Sketch Bode plots of $C(s)G(s)$ for PD controllers:
   - $K = 1$, $T_D = 10 \to 20\log|K| = 0$
   - $K = 10$, $T_D = 10 \to 20\log|K| = 20$
   - Corner frequency: $\omega_c = \dfrac{1}{T_D} = 10^{-1}$
3. **Solution:**

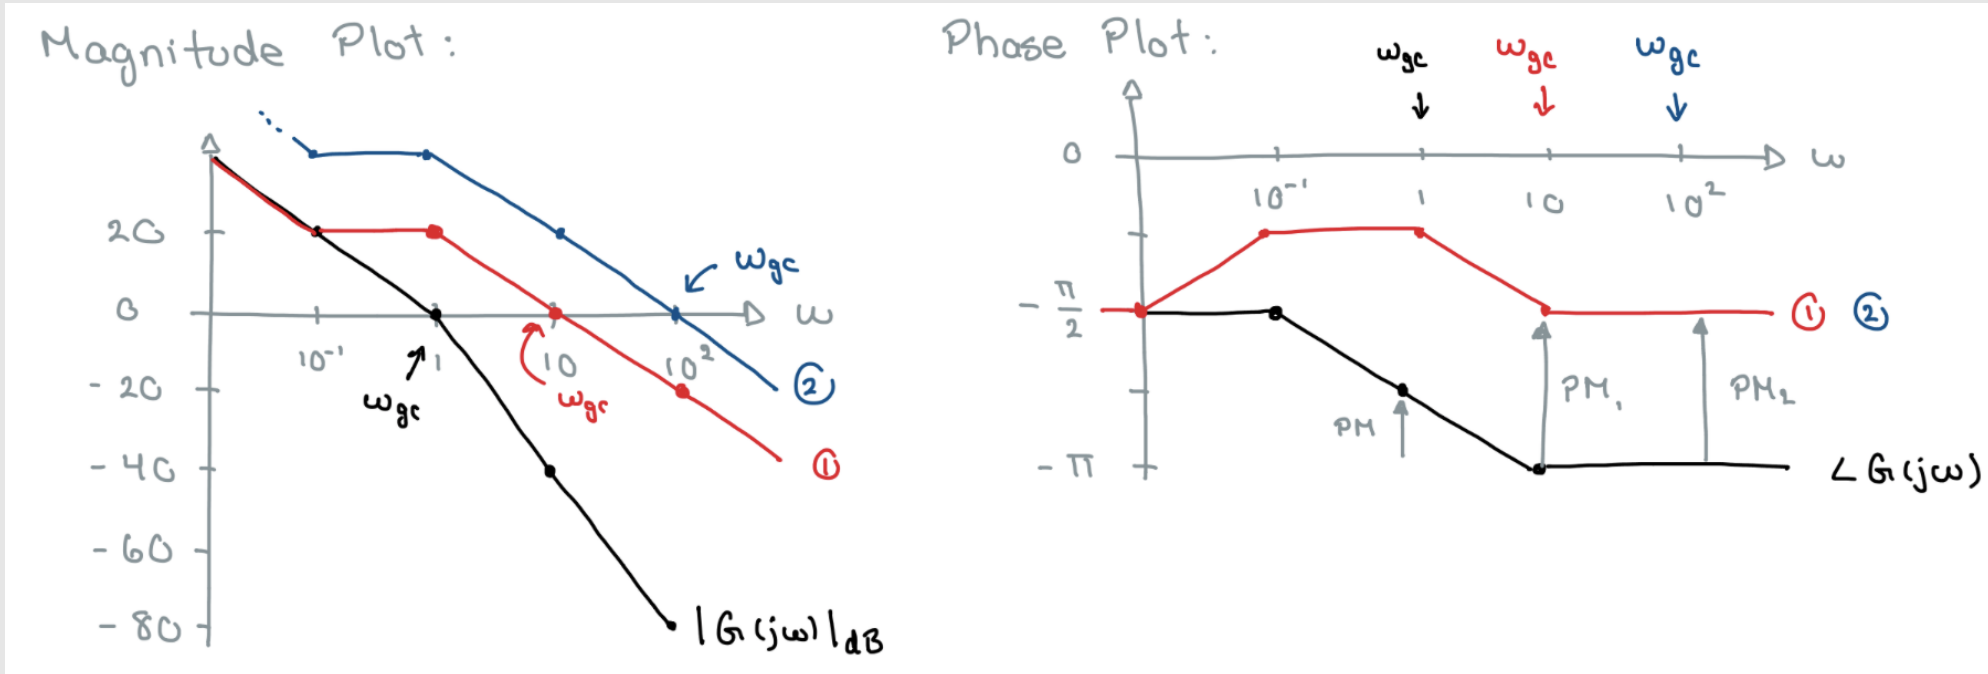
Magnitude Plot :
20
0
- 20
- 40
- 60
- 80
10⁻¹
1
10
10²
ω
ωgc
ωgc
ωgc
②
①
|G(jω)|dB
Phase Plot :
ωgc
ωgc
ωgc
0
−π/2
−π
10⁻¹
1
10
10²
ω
① ②
PM
PM₁
PM₂
∠G(jω)

Figure 4