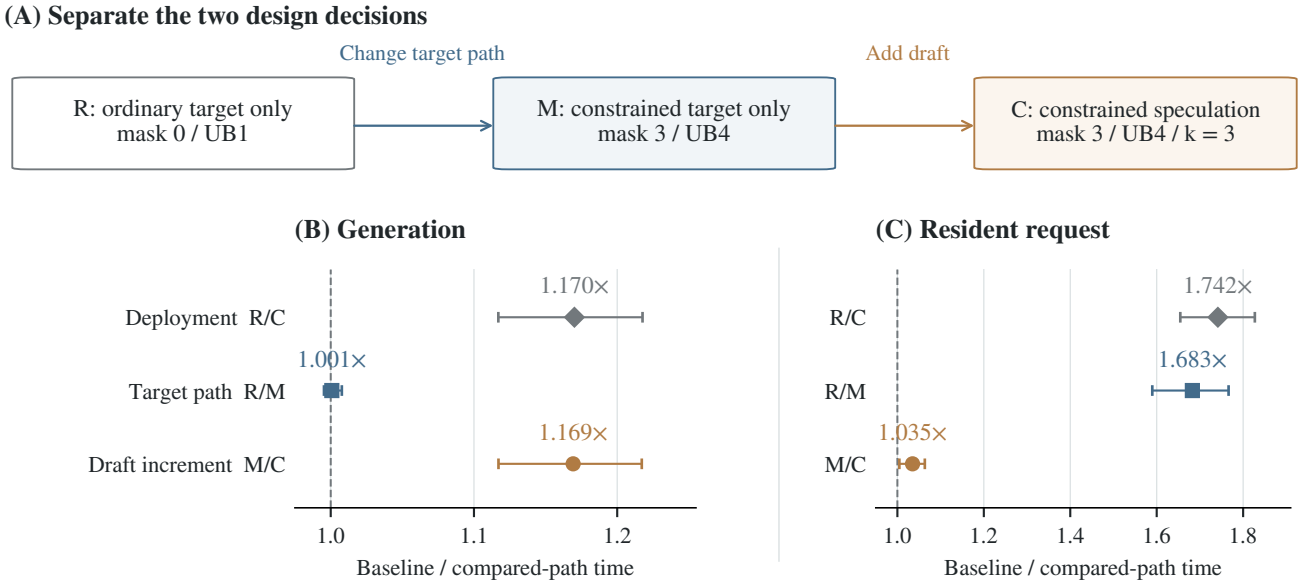

Request ratios: $1.742 \simeq 1.683 \times 1.035$; most deployment gain exists without a draft.

Different timer intervals and x-axis ranges; ratios are multiplicative comparisons, not component costs.