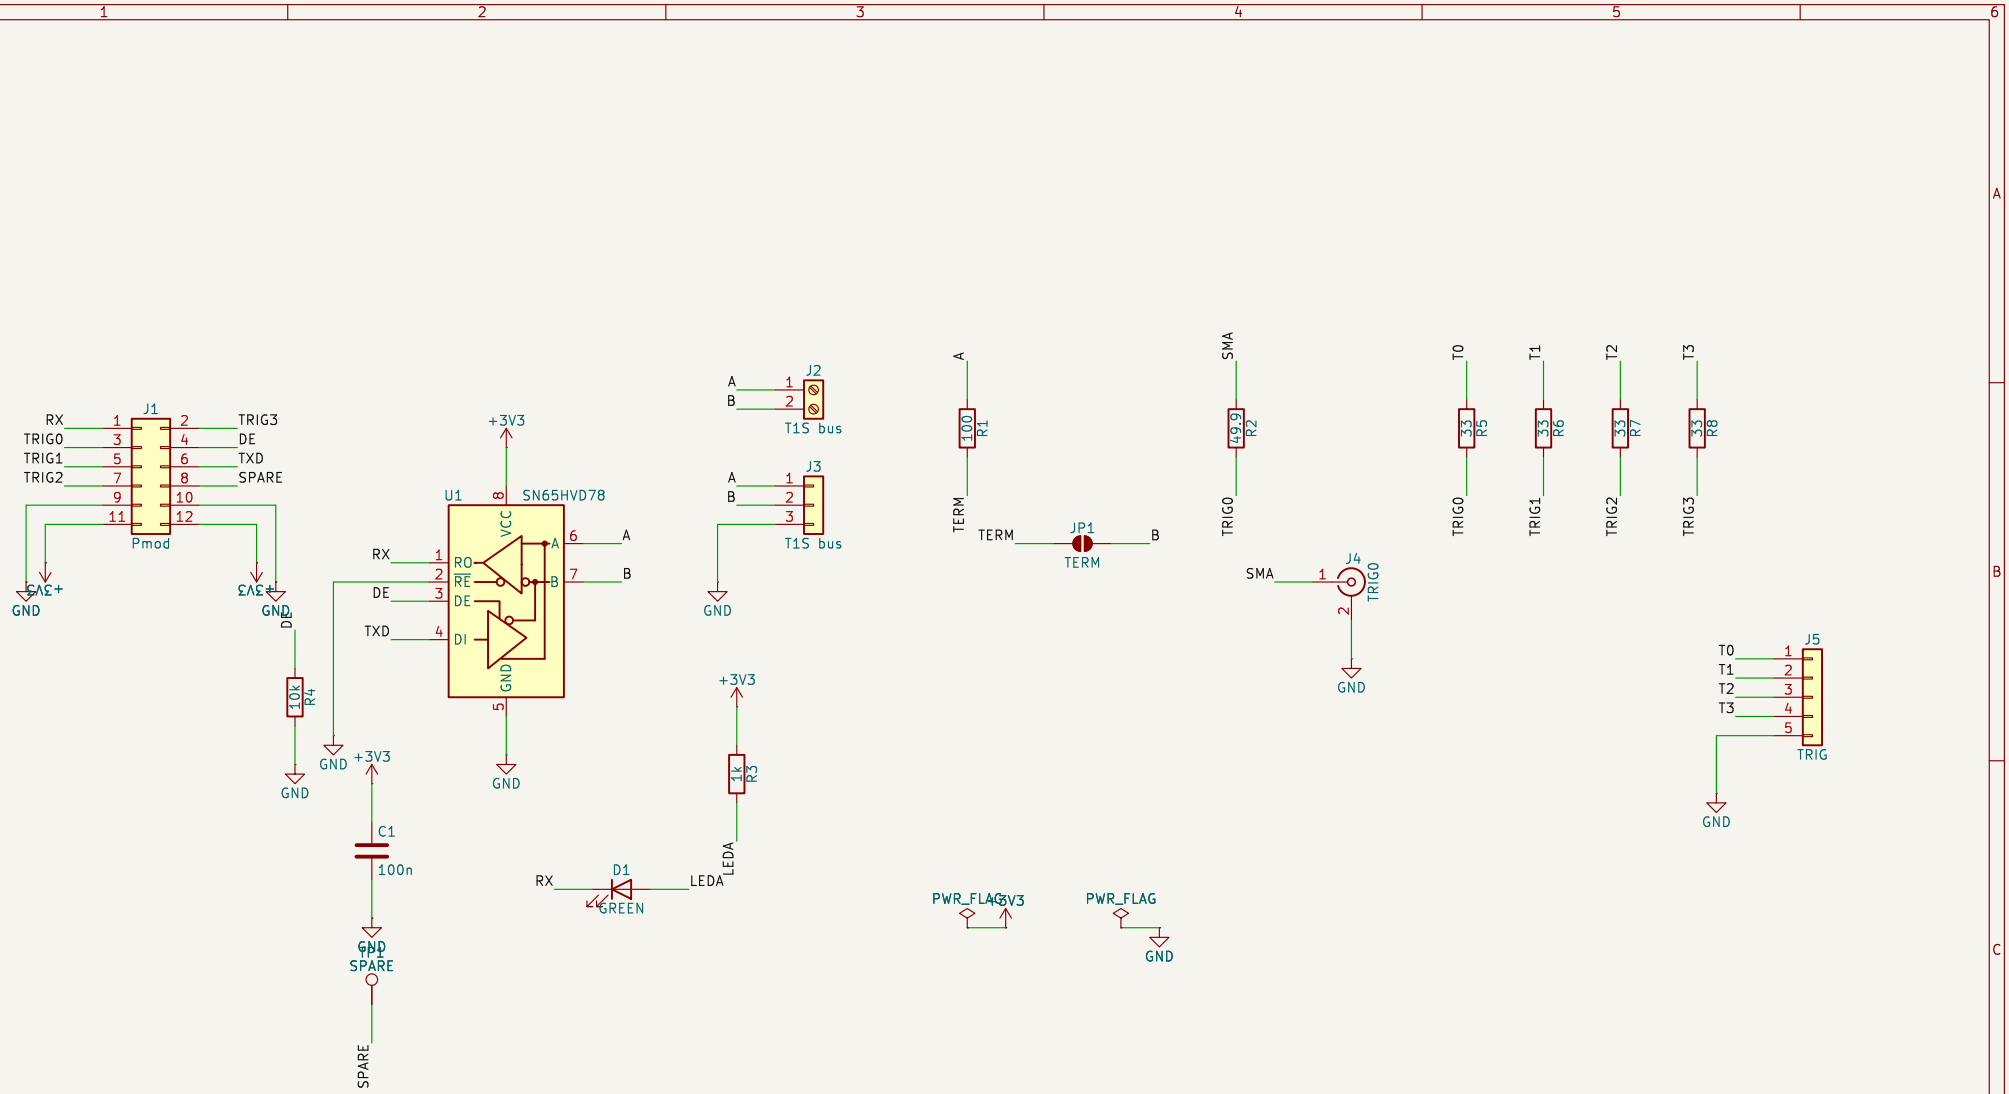


Pmod: IO1=RX IO2..4=TRIG0..2 IO7=TRIG3 IO8=DE IO9=TXD IO10=spare
RS-485 receiver as a high-impedance tap on a 10BASE-T1S bus, four trigger outputs

Sheet: /
File: t1s_tap.kicad_sch

Title: 10BASE-T1S tap Pmod

Size: A4	Date: 2026-10-30	**Rev: A**
KiCad E.D.A. 9.0.9		Id: 1/1