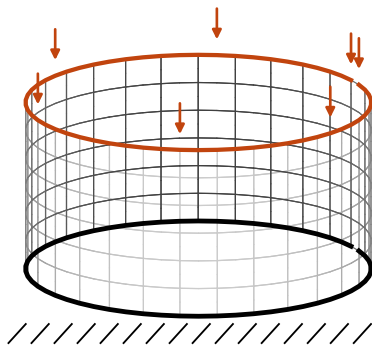
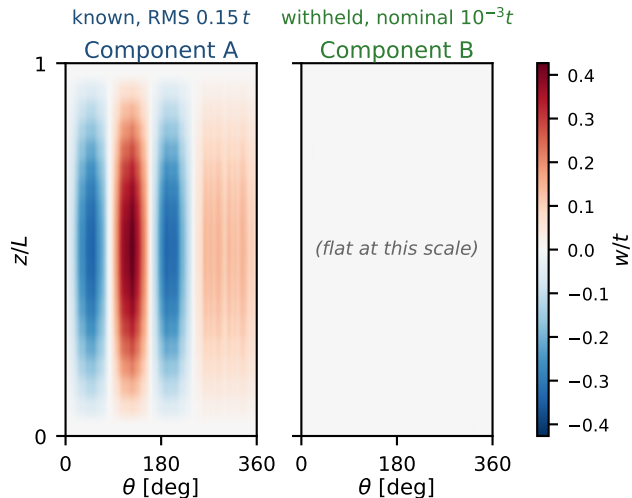


(b) the imperfection law

(a) axial compression of a thin shell

prescribed $\delta = 1.5 \delta_{cr}$ 

clamped, all 6 DOF

 $R/t \in [95, 245]$, $L/R \in [0.6, 1.5]$ 

(c) what one sample stores

data/{id}/nodal_data [11,1, N] + mesh_edge [2, E]

0:3	reference coordinates	input
3:6	displacement u_x, u_y, u_z	OUTPUT
6:9	Component A offset	input
9	local thickness $t(z)$	input
10	node type	input

information wall

latent/Component B coefficients **WITHHELD**

kept for diagnostics; a model reading the documented input rows cannot read these coefficients

Nominal A/B scale ratio: 150; B varies across solver draws

(d) design space: 22 geometries, 896 draws

