


比赛咨询/专利软著申请/成品定制加我私聊

-提供了四个PWM芯片地址选择位,通过焊锡来设置高低位

-使用主控板上D4和D5作为I2C接口进行通信:D4-SDA、D5-SCL

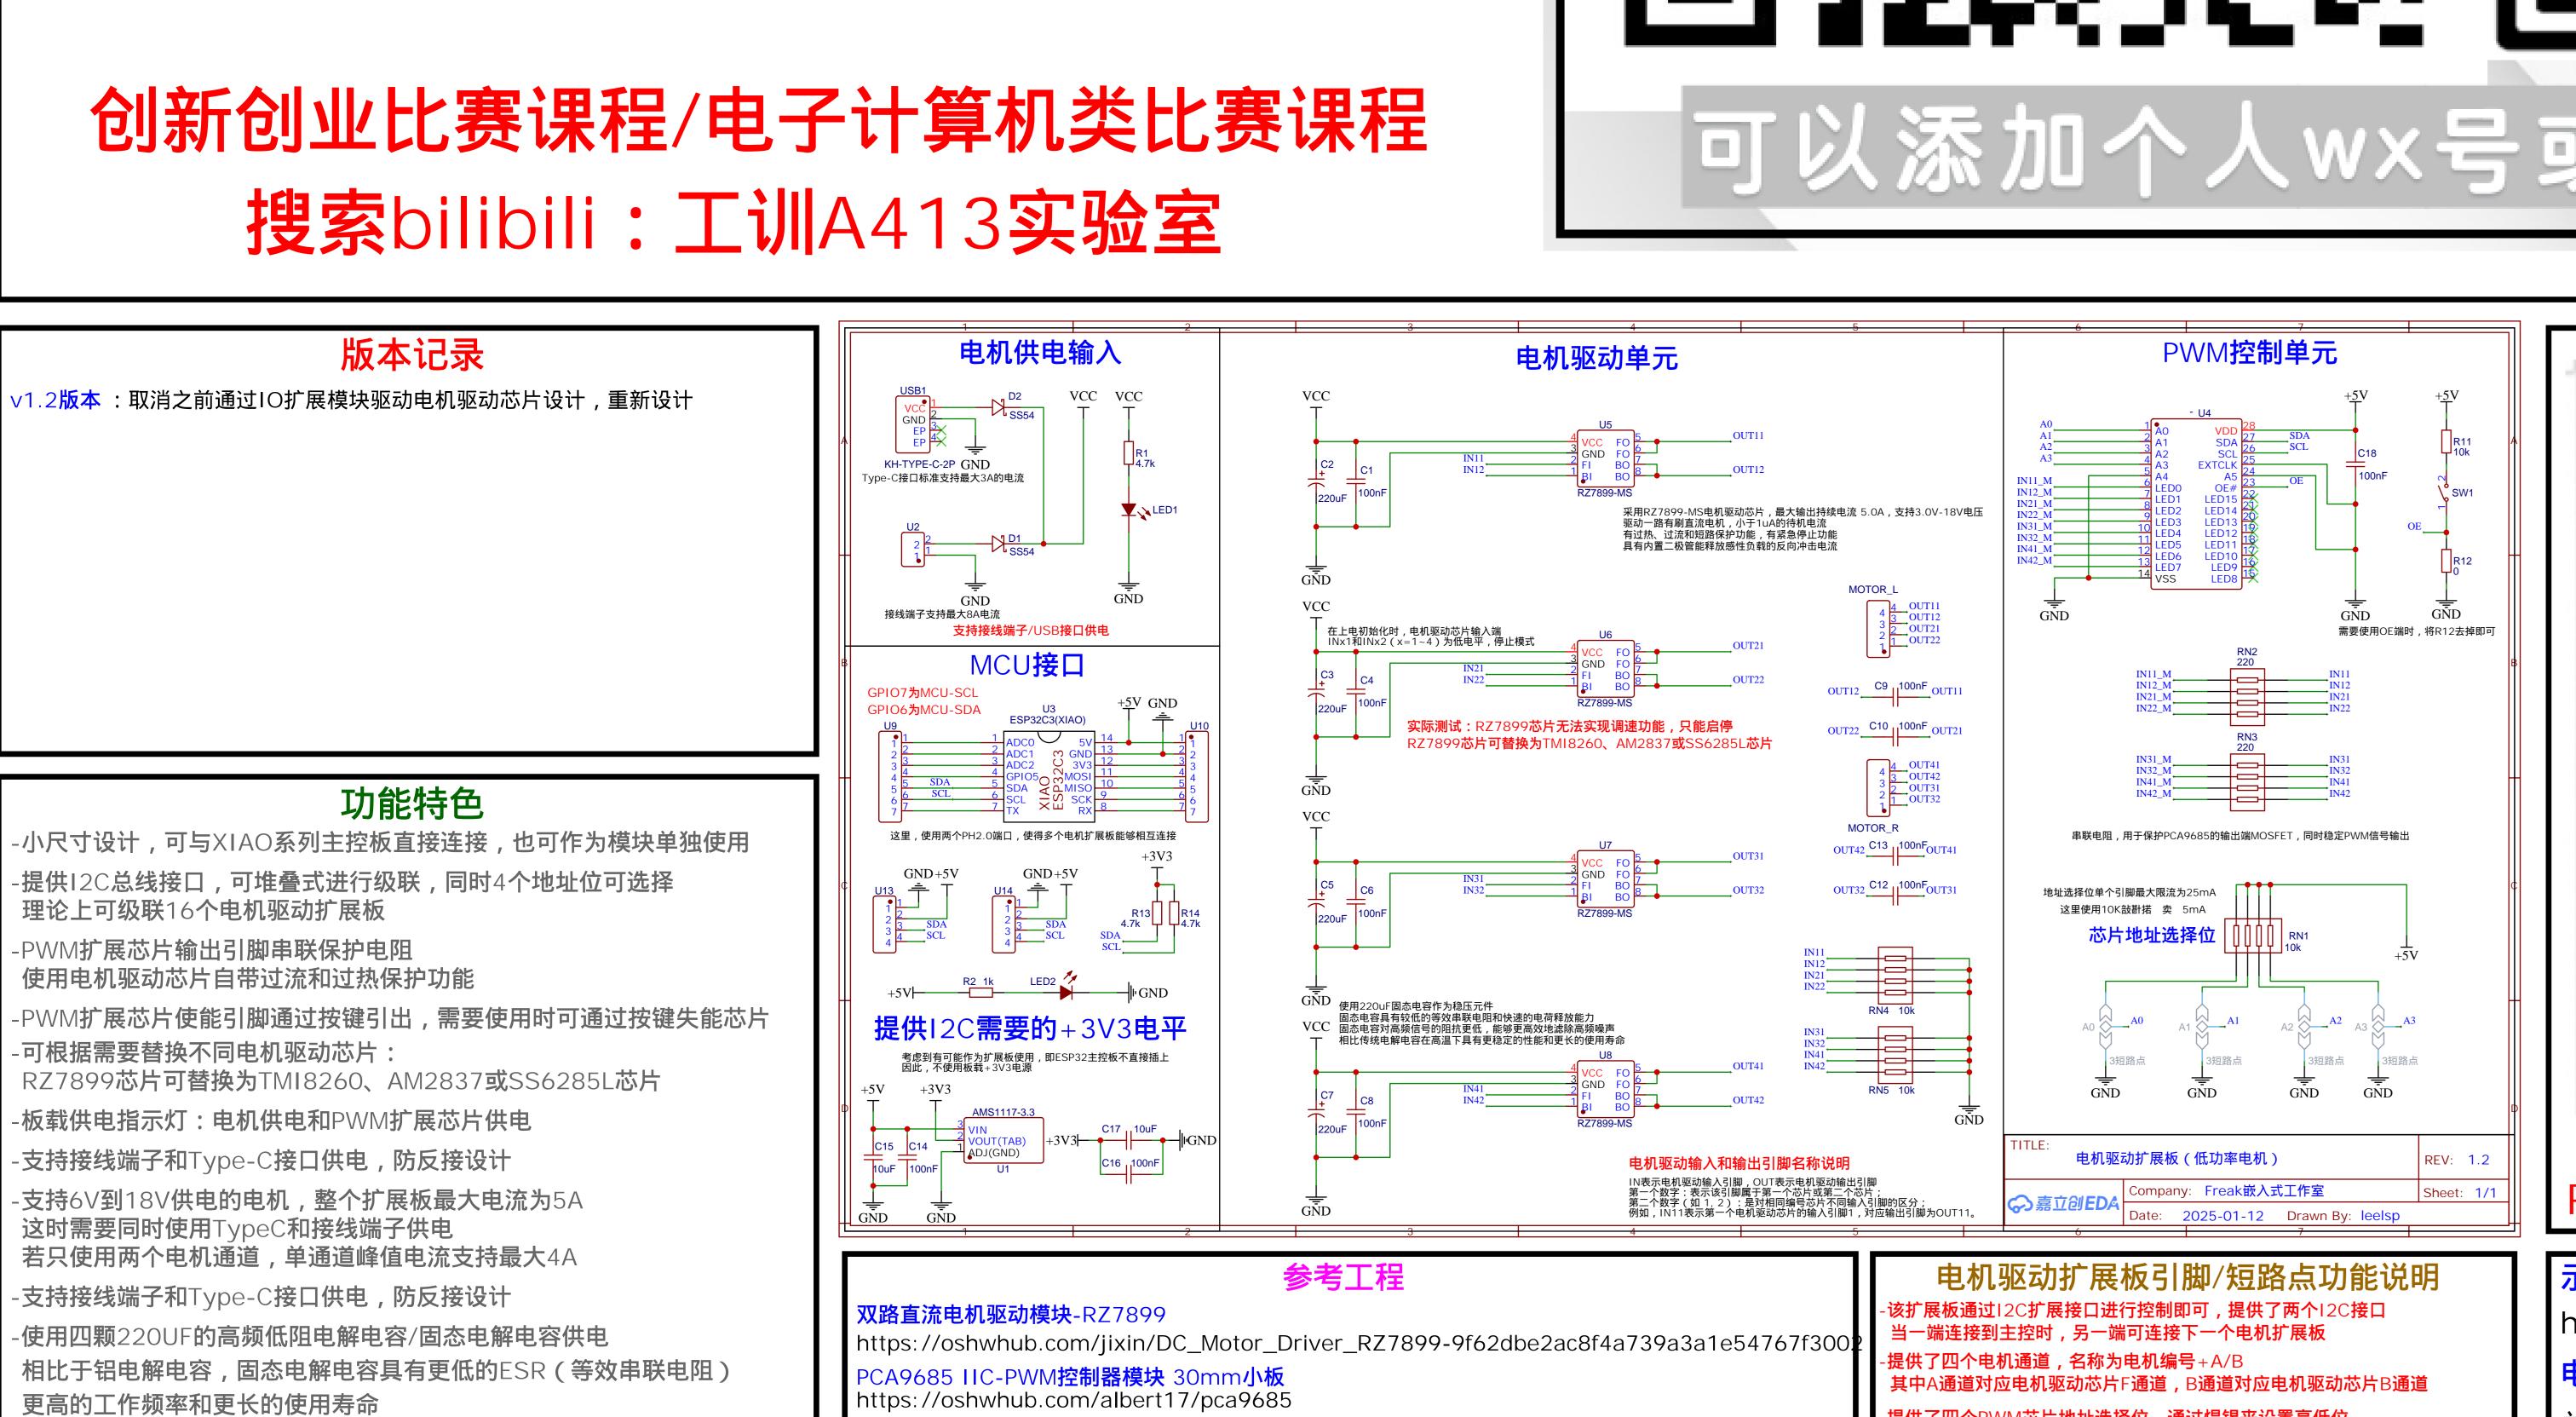

https://www.adafruit.com/product/3243

-扩展板背面供电VCC区域采用开窗设计,可通过焊锡来增大散热



https://github.com/leezisheng/Domino-Series-Expansion-Board/tree/main/Bus-Motor-Expansion-Board 电路源文件获取 关注公众号-Freak嵌入式

