


3,2

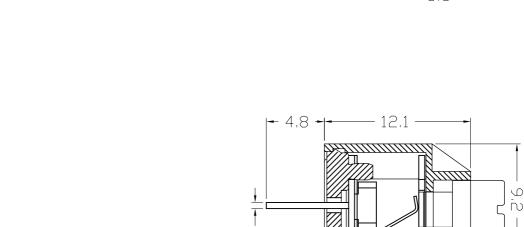

Materials Housing: PA66 (UL 94V-0)

300V 8A 22-18AWG 1.0mm² Poles: 2P, 3P

Pitch: 5.0mm(.197")

Solder Pin: Brass, Tin Plated

Clamping: Stainless steel

XINLAIYA ELECTRONIC CO., LTD 《新菜亚电子 绘图/Drawing by 备注 /Remark 图名/File name 审核/Checked by XY118 页序/Sheet 文件编号/File No. 批准/Approved by .xx ±0.05 .xx°±0.5 x. ±0.2 x.° ±2° .x ±0.1 .x° ±1° 未注公差 General Tolerance 平位/units: MM

设计/Designed by