



1. Description

1.1. Project

Project Name	MCU_Project
Board Name	STM32F411E-DISCO
Generated with:	STM32CubeMX 6.6.1
Date	12/27/2022

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F411
MCU name	STM32F411VETx
MCU Package	LQFP100
MCU Pin number	100

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------


3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	PC14-OSC32_IN
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	PC15-OSC32_OUT
10	VSS	Power		
11	VDD	Power		
12	PH0 - OSC_IN	I/O	RCC_OSC_IN	PH0-OSC_IN
13	PH1 - OSC_OUT	I/O	RCC_OSC_OUT	PH1-OSC_OUT
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
24	PA1	I/O	ADC1_IN1	
25	PA2	I/O	USART2_TX	
26	PA3	I/O	ADC1_IN3	
27	VSS	Power		
28	VDD	Power		
30	PA5	I/O	ADC1_IN5	
31	PA6	I/O	ADC1_IN6	
35	PB0 *	I/O	GPIO_Output	RUNTIME_TEST_GPIO
48	VCAP1	Power		
49	VSS	Power		
50	VDD	Power		
59	PD12 *	I/O	GPIO_Output	LD4 [Green Led]
60	PD13 *	I/O	GPIO_Output	LD3 [Orange Led]
61	PD14 *	I/O	GPIO_Output	LD5 [Red Led]
62	PD15 *	I/O	GPIO_Output	LD6 [Blue Led]
63	PC6	I/O	USART6_TX	
64	PC7	I/O	USART6_RX	
68	PA9	I/O	USART1_TX	
69	PA10	I/O	USART1_RX	
70	PA11	I/O	USB_OTG_FS_DM	
71	PA12	I/O	USB_OTG_FS_DP	
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
73	VCAP2	Power		
74	VSS	Power		

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
87	PD6	I/O	USART2_RX	
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

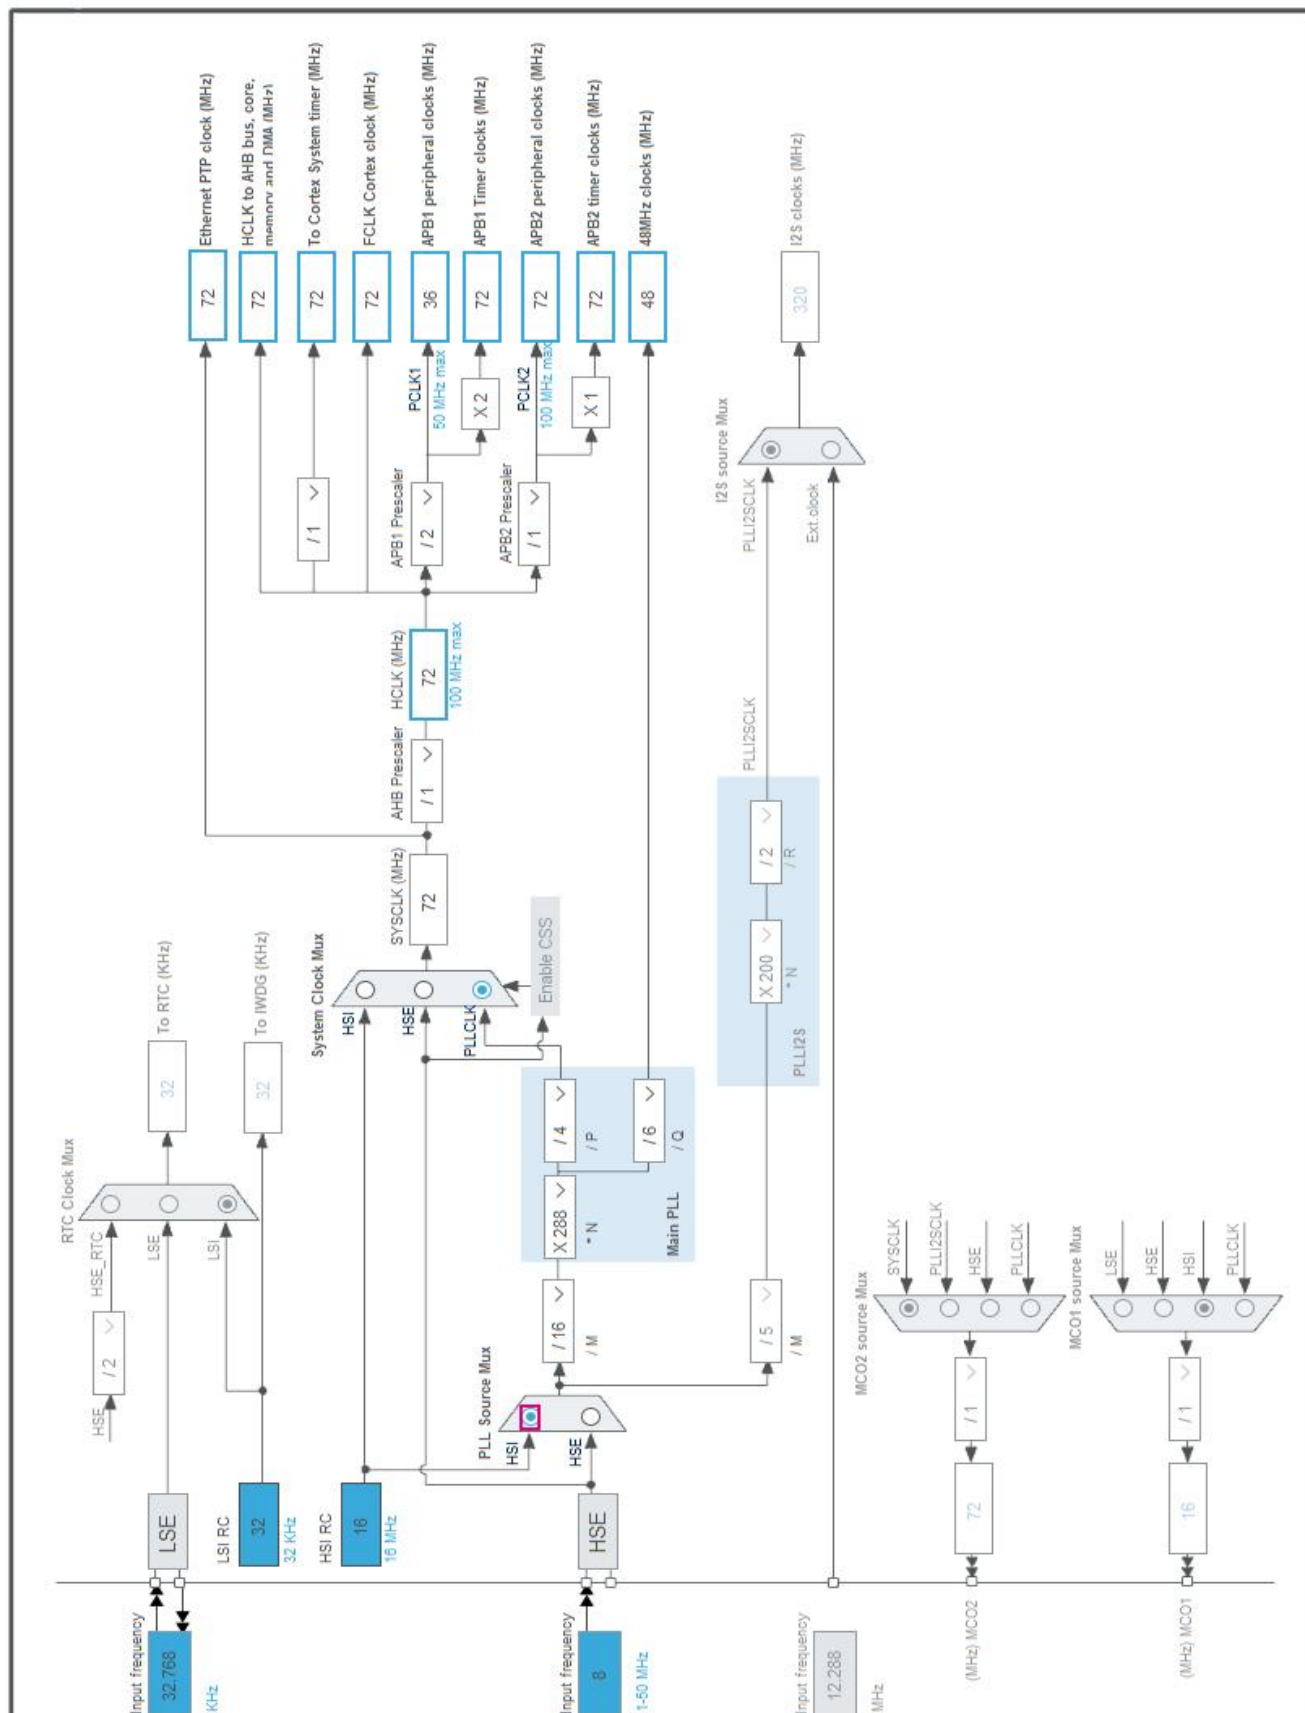

5. Software Project

5.1. Project Settings

Name	Value
Project Name	MCU_Project
Project Folder	F:\SEMG_Mechanical_Arm\code\MCU_Project\MCU_Project
Toolchain / IDE	MDK-ARM V5.32
Firmware Package Name and Version	STM32Cube FW_F4 V1.25.2
Application Structure	Advanced
Generate Under Root	No
Do not generate the main()	No
Minimum Heap Size	0x1000
Minimum Stack Size	0x800

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	Yes

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	MX_DMA_Init	DMA
3	SystemClock_Config	RCC
4	MX_ADC1_Init	ADC1
5	MX_USART1_UART_Init	USART1
6	MX_USART2_UART_Init	USART2
7	MX_USART6_UART_Init	USART6
8	MX_TIM2_Init	TIM2
9	MX_TIM3_Init	TIM3
10	MX_TIM4_Init	TIM4
11	MX_USB_DEVICE_Init	USB_DEVICE

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F411
MCU	STM32F411VETx
Datasheet	DS10314_Rev6

6.2. Parameter Selection

Temperature	25
Vdd	1.7

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	1.7	1.7
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	SRAM	n/a
CPU Frequency	100 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LPLV Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	12.7 mA	9 μ A
Duration	0.1 ms	0.9 ms
DMIPS	125.0	0.0
Ta Max	104.07	105
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	1.28 mA
Battery Life	3 months, 19 days, 6 hours	Average DMIPS	125.0 DMIPS

6.6. Chart

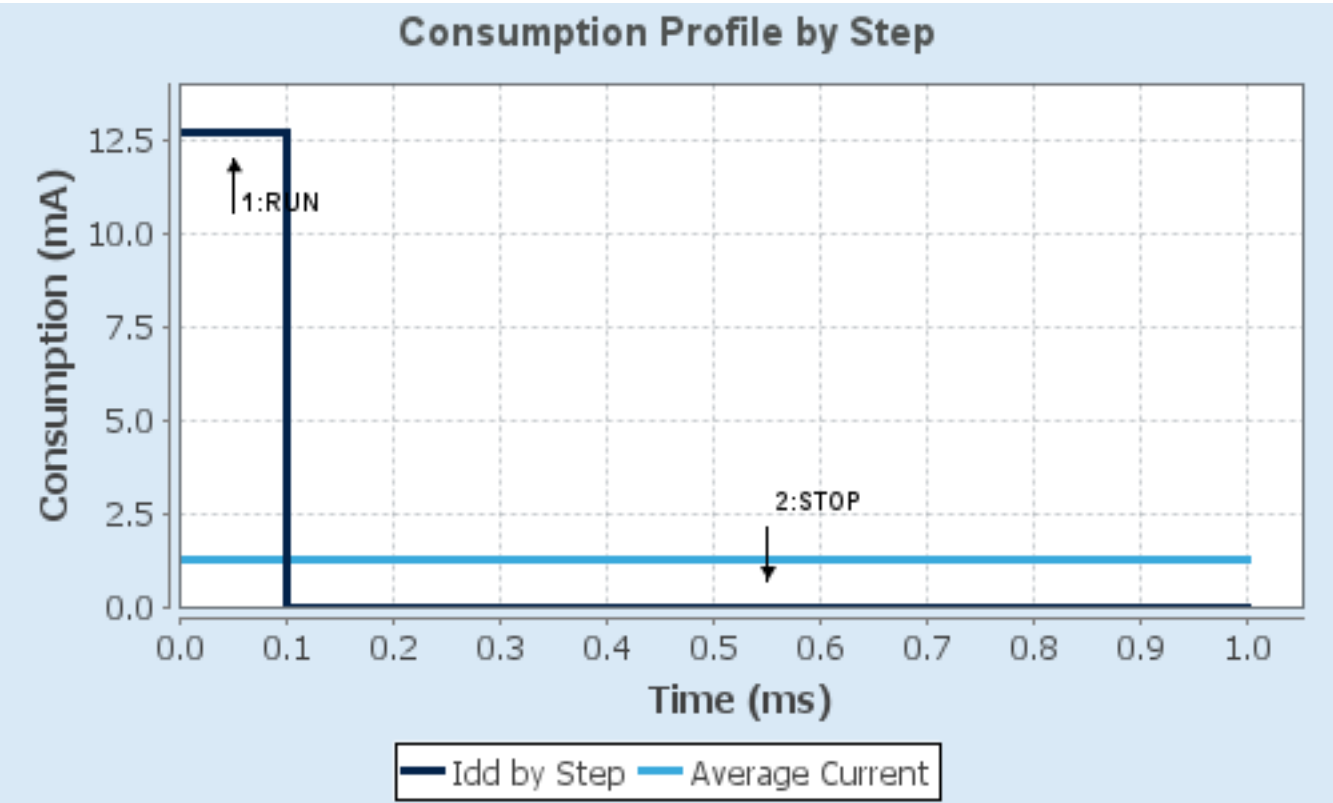

7. Peripherals and Middlewares Configuration

7.1. ADC1

mode: IN1

mode: IN3

mode: IN5

mode: IN6

mode: Vrefint Channel

7.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Clock Prescaler PCLK2 divided by 2

Resolution 12 bits (15 ADC Clock cycles)

Data Alignment Right alignment

Scan Conversion Mode Enabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode **Enabled ***

Number Of Discontinuous Conversions 1

DMA Continuous Requests **Enabled ***

End Of Conversion Selection EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion **5 ***

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

Rank 1

Channel Channel 1

Sampling Time **15 Cycles ***

Rank **2 ***

Channel **Channel 3 ***

Sampling Time **15 Cycles ***

Rank **3 ***

Channel **Channel 5 ***

Sampling Time **15 Cycles ***

Rank **4 ***

Channel **Channel 6 ***

Sampling Time **15 Cycles ***

Rank	5 *
Channel	Channel Vrefint *
Sampling Time	15 Cycles *
ADC_Injected_ConversionMode:	
Number Of Conversions	0
WatchDog:	
Enable Analog WatchDog Mode	false

7.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

7.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.4. TIM2

Clock Source : Internal Clock

7.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	720-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	50-1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Enable *
Trigger Output (TRGO) Parameters:	
Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

7.5. TIM3

Clock Source : Internal Clock

7.5.1. Parameter Settings:

Counter Settings:	
Prescaler (PSC - 16 bits value)	720-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	1000-1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable
Trigger Output (TRGO) Parameters:	
Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

7.6. TIM4

Clock Source : Internal Clock

7.6.1. Parameter Settings:

Counter Settings:	
Prescaler (PSC - 16 bits value)	720-1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	5000-1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable
Trigger Output (TRGO) Parameters:	
Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

7.7. USART1

Mode: Asynchronous

7.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	9600 *
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.8. USART2

Mode: Asynchronous

7.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.9. USART6

Mode: Asynchronous

7.9.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None

Stop Bits 1

Advanced Parameters:

Data Direction Receive and Transmit
Over Sampling 16 Samples

7.10. USB_OTG_FS

Mode: Device_Only

7.10.1. Parameter Settings:

Speed Device Full Speed 12MBit/s
Low power Disabled
Link Power Management Disabled
VBUS sensing Disabled
Signal start of frame Disabled

7.11. STMicroelectronics.X-CUBE-ALGOBUILD.1.3.0

mode: DSPOoLibraryJjLibrary

7.12. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

7.12.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces) 1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration) 1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors) 512
USBD_SELF_POWERED (Enabled self power) Enabled
USBD_DEBUG_LEVEL (USBD Debug Level) 0: No debug message

Class Parameters:

USB CDC Rx Buffer Size 2048
USB CDC Tx Buffer Size 2048

7.12.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier) 1155
LANGID_STRING (Language Identifier) English(United States)

MANUFACTURER_STRING (Manufacturer Identifier)

STMicroelectronics

Device Descriptor FS:

PID (Product Identifier)

22336

PRODUCT_STRING (Product Identifier)

STM32 Virtual ComPort

CONFIGURATION_STRING (Configuration Identifier)

CDC Config

INTERFACE_STRING (Interface Identifier)

CDC Interface

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA1	ADC1_IN1	Analog mode	No pull-up and no pull-down	n/a	
	PA3	ADC1_IN3	Analog mode	No pull-up and no pull-down	n/a	
	PA5	ADC1_IN5	Analog mode	No pull-up and no pull-down	n/a	
	PA6	ADC1_IN6	Analog mode	No pull-up and no pull-down	n/a	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	PC14-OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	PC15-OSC32_OUT
	PH0 - OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	PH0-OSC_IN
	PH1 - OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	PH1-OSC_OUT
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PD6	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USART6	PC6	USART6_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PC7	USART6_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
USB_OTG_FS	PA11	USB_OTG_FS_DM	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA12	USB_OTG_FS_DP	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PB0	GPIO_Output	Output Push Pull	Pull-down *	Very High *	RUNTIME_TEST_GPIO
	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD4 [Green Led]

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Orange Led]
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD5 [Red Led]
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD6 [Blue Led]

8.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC1	DMA2_Stream0	Peripheral To Memory	High *

ADC1: DMA2_Stream0 DMA request Settings:

Mode: **Circular ***
 Use fifo: Disable
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Half Word
 Memory Data Width: Half Word

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
ADC1 global interrupt	true	0	0
TIM2 global interrupt	true	1	0
TIM3 global interrupt	true	10	0
TIM4 global interrupt	true	4	0
USART1 global interrupt	true	3	0
USART2 global interrupt	true	5	0
DMA2 stream0 global interrupt	true	2	0
USB On The Go FS global interrupt	true	0	0
USART6 global interrupt	true	6	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
ADC1 global interrupt	false	true	true
TIM2 global interrupt	false	true	true

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
TIM3 global interrupt	false	true	true
TIM4 global interrupt	false	true	true
USART1 global interrupt	false	true	true
USART2 global interrupt	false	true	true
DMA2 stream0 global interrupt	false	true	true
USB On The Go FS global interrupt	false	true	true
USART6 global interrupt	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

Middleware					
USB_DEVICE ✓					
Additional Software					
X-CUBE-ALGOBUILD ✓					
System Core	Analog	Timers	Connectivity	Multimedia	Computing
DMA ✓	ADC1 ✓	TIM2 ✓	USART1 ✓		
GPIO ✓		TIM3 ✓	USART2 ✓		
NVIC ✓		TIM4 ✓	USART6 ✓		
RCC ✓			USB_FS ✓		
SYS ✓					

10. Software Pack Report

10.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	X-CUBE-ALGOBUILD	1.3.0	Class : DSP Library Group : DSP Library Version : 1.3.0

11. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32f411_bsd1.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32f411_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32f4_svd.zip
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32f411_bsd1.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32f411_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32f4_svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Training Material	https://www.st.com/resource/en/sales_guide/sg_sc2154.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32f4x1.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstmcsuite.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Product Certifications	https://www.st.com/resource/en/certification_document/stm32_authentication_can.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1181-electrostatic-discharge-sensitivity-measurement-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2834-how-to-get-the-best-adc-accuracy-in-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2867-oscillator-design-guide-for-stm8afals-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3154-can-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4013-stm32-crossseries-timer-overview-stmicroelectronics.pdf
- Application Notes [---

Page 25](https://www.st.com/resource/en/application_note/an4031-using-the-</p></div><div data-bbox=)

stm32f2-stm32f4-and-stm32f7-series-dma-controller-
stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4229-how-to-implement-a-vocoder-solution-using-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-stm32-microcontroller-random-number-generation-validation-using-the-nist-statistical-test-suite-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4277-using-stm32-device-pwm-shutdown-features-for-motor-control-and-digital-power-conversion-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4488-getting-started-with-stm32f4xxx-mcu-hardware-development-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4616-migrating-from-stm32f401-and-stm32f411-lines-to-stm32l4-series-and-stm32l4-series-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4646-peripheral-interconnections-on-stm32f401-and-stm32f411-lines-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-

hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-managing-memory-protection-unit-in-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4850-stm32-mcus-spreadspectrum-clock-generation-principles-properties-and-implementation-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4879-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4904-migration-of-microcontroller-applications-from-stm32f1-series-to-stm32f4-access-lines-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4908-stm32-usart-automatic-baud-rate-detection-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4995-using-an-electromyogram-technique-to-detect-muscle-activity-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-thermal-management-guidelines-for-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-stm32-microcontrollers-security-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5225-usb-typec-

power-delivery-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5543-enhanced-methods-to-handle-spi-communication-on-stm32-devices-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1202_freertos_guide-for_related_Tools_freertos-guide-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an1602_semihosting_in_for_related_Tools_truestudio-how-to-do-semihosting-in-truestudio-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an1801_stm32cubeprog_for_related_Tools_rammer_in_truestudio-installing-stm32cubeprogrammer-in-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/atollic_editing_keyboard_for_related_Tools_shortcuts-atollic-editing-keyboard-shortcuts-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/iar_to_atollic_truestudio_for_related_Tools_migration_guide-truestudio-for-arm-migration-guide-iar-embedded-workbench-to-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/stm32cubemx_installation_in_truestudio-stm32cubemx-installation-in-truestudio-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2656-stm32f10xxx-lcd-glass-driver-firmware-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an2790-tft-lcd-for_related_Tools_interfacing-with-the-highdensity-stm32f10xxx-fsmc-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an3078-stm32-

for related Tools inapplication-programming-over-the-ic-bus-stmicroelectronics.pdf
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3116-stm32s-adc-](https://www.st.com/resource/en/application_note/an3116-stm32s-adc-modes-and-their-applications-stmicroelectronics.pdf)
for related Tools modes-and-their-applications-stmicroelectronics.pdf
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3174-implementing-](https://www.st.com/resource/en/application_note/an3174-implementing-receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-microcontrollers-stmicroelectronics.pdf)
for related Tools receivers-for-infrared-remote-control-protocols-using-stm32f10xxx-
& Software microcontrollers-stmicroelectronics.pdf

Application Notes [https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-](https://www.st.com/resource/en/application_note/an3241-qvga-tftlcd-direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf)
for related Tools direct-drive-using-the-stm32f10xx-fsmc-peripheral-stmicroelectronics.pdf
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3307-guidelines-for-](https://www.st.com/resource/en/application_note/an3307-guidelines-for-obtaining-iec-60335-class-b-certification-for-any-stm32-application-stmicroelectronics.pdf)
for related Tools obtaining-iec-60335-class-b-certification-for-any-stm32-application-
& Software stm32microelectronics.pdf

Application Notes [https://www.st.com/resource/en/application_note/an3364-migration-and-](https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf)
for related Tools compatibility-guidelines-for-stm32-microcontroller-applications-
& Software stm32microelectronics.pdf

Application Notes [https://www.st.com/resource/en/application_note/an3965-](https://www.st.com/resource/en/application_note/an3965-stm32f40xstm32f41x-inapplication-programming-using-the-usart-stmicroelectronics.pdf)
for related Tools stm32f40xstm32f41x-inapplication-programming-using-the-usart-
& Software stm32microelectronics.pdf

Application Notes [https://www.st.com/resource/en/application_note/an3969-eeeprom-](https://www.st.com/resource/en/application_note/an3969-eeeprom-emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf)
for related Tools emulation-in-stm32f40xstm32f41x-microcontrollers-stmicroelectronics.pdf
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3990-upgrading-](https://www.st.com/resource/en/application_note/an3990-upgrading-stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf)
for related Tools stm32f4discovery-board-firmware-using-a-usb-key-stmicroelectronics.pdf
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3997-audio-playback-](https://www.st.com/resource/en/application_note/an3997-audio-playback-and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf)
for related Tools and-recording-using-the-stm32f4discovery-stmicroelectronics.pdf
& Software

Application Notes [https://www.st.com/resource/en/application_note/an3998-pdm-audio-](https://www.st.com/resource/en/application_note/an3998-pdm-audio-software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf)
for related Tools software-decoding-on-stm32-microcontrollers-stmicroelectronics.pdf
& Software

Application Notes [https://www.st.com/resource/en/application_note/an4044-floating-point-](https://www.st.com/resource/en/application_note/an4044-floating-point-unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf)
for related Tools unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4187-using-the-crc-for-related-tools-peripheral-in-the-stm32-family-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4323-getting-started-for-related-tools-with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4365-using-stm32f4-mcu-power-modes-with-best-dynamic-efficiency-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4435-guidelines-for-obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-application-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4457-implementing-an-emulated-uart-on-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4499-stm32-nrf51822-bluetooth-low-energy-system-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4502-stm32-smbuspmbus-embedded-software-expansion-for-stm32cube-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4515-using-batch-acquisition-mode-bam-to-maximize-power-efficiency-on-stm32f410-stm32f411-stm32f412-stm32f413-microcontroller-lines-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4657-stm32-inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4666-parallel-synchronous-transmission-using-gpio-and-dma-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4678-full-duplex-spi-emulation-for-stm32f4-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application_note/an4701-proprietary-code-readout-protection-on-microcontrollers-of-the-stm32f4-series-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4739-stm32cube-firmware-examples-for-stm32f4-series-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4758-proprietary-code-readout-protection-on-stm32l4-stm32l4-stm32g4-and-stm32wb-series-mcus-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4759-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-microcontrollers-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4841-digital-signal-processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an4968-proprietary-code-read-out-protection-pcrop-on-stm32f72xxx-and-stm32f73xxx-microcontrollers-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5054-secure-programming-using-stm32cube programmer-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5056-integration-guide-for-the-xcubesbsfu-stm32cube-expansion-package-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5360-getting-started-with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5361-getting-started-with-projects-based-on-dualcore-stm32h7-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
for related Tools
& Software

Application Notes https://www.st.com/resource/en/application_note/an5394-getting-started-with-projects-based-on-the-stm32l5-series-in-stm32cubeide-stmicroelectronics.pdf
for related Tools
& Software

Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5418-how-to-build-a-simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5426-migrating-graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-550-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5464-position-control-of-a-three-phase-permanent-magnet-motor-using-xcubemcsdk-or-xcubemcsdkful-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5564-getting-started-with-projects-based-on-dual-core-stm32wl-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5698-adapting-the-xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-other-safety-standards-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5731-stm32cubemx-and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0088-fir-filter-design-by-sampling-windowing-and-modulating-the-sinc-function-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0089-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0091-lattice-wave-digital-filter-design-and-automatic-c-code-generation-stmicroelectronics.pdf
Design Notes & Tips	https://www.st.com/resource/en/design_tip/dt0092-lattice-wave-digital-filter-test-and-performance-verification-stmicroelectronics.pdf
Device Option Lists	https://www.st.com/resource/en/device_option_list/opl_stm32f411_512k.zip
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0287-stm32f411xc-and-stm32f411xe-device-limitations-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00115249.pdf

Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0214-stm32-cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0383-stm32f411xce-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-foc-sdk-v40-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-microcontrollers-in-bga-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf