

Physics Note

Matsumotofukashi High School

240620 Tsuyoshi Kobayashi

form 2026-04-14

1 *Electric Field*


1.1 Electrostatic Force

- **electrification** - A process getting charge
- **static electoricity** - static charge
- **electoric charge** -
- **point charge** - charge which can be ignored the size

Electrostatic force is an interraction between charged particles.


$$|\mathbb{F}| = k \frac{q_1 q_2}{r^2} \quad (1)$$

1.2 Structure of Atom

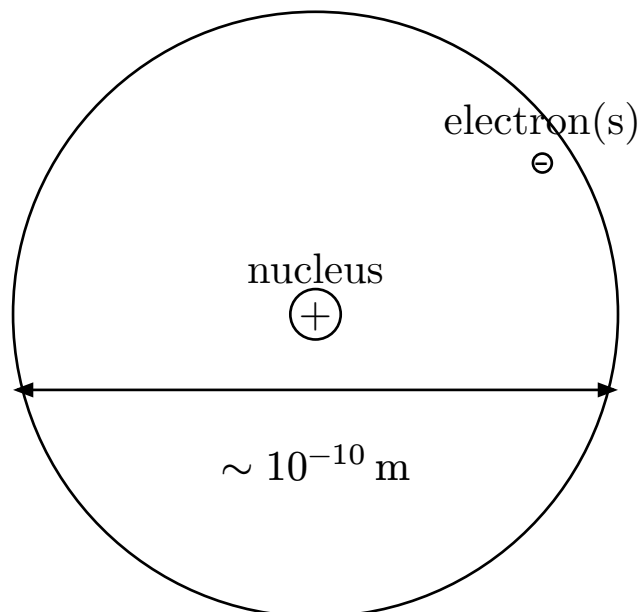



- **elementary charge** $1.6 \cdot 10^{19} \text{ C}$

1.3 Mechanism of Electrification

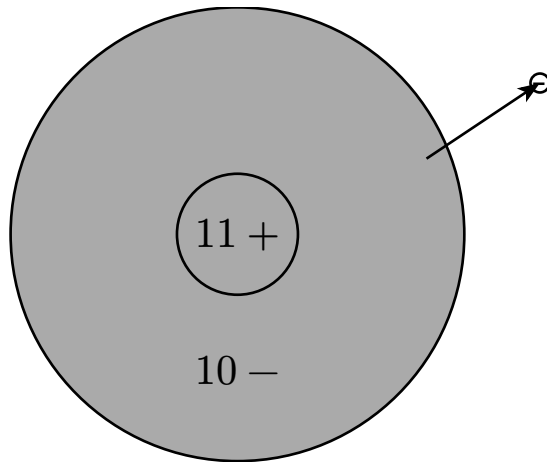

Total amount of charge is conserved.

– **Coulomb's law**

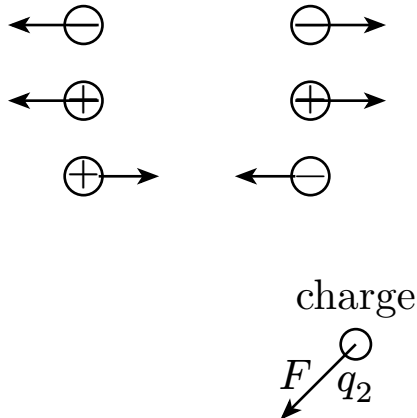

$$F = k \frac{q_1 q_2}{r^2} \quad (2)$$


k depends on type of surrounding substance.

In vacuum, $k \approx 9.0 \cdot 10^9 \text{ N m}^2 \text{ C}^{-2}$


1.4 Electrostatic Induction

- **Conductor** - Substances which can conduct electricity.
ex) metal, carbon
- **Nonconductor** - Substances which cannot conduct electricity.
- **Semiconductor** - Substances which have middle electric resistance between conductor and nonconductor.


- **induction**

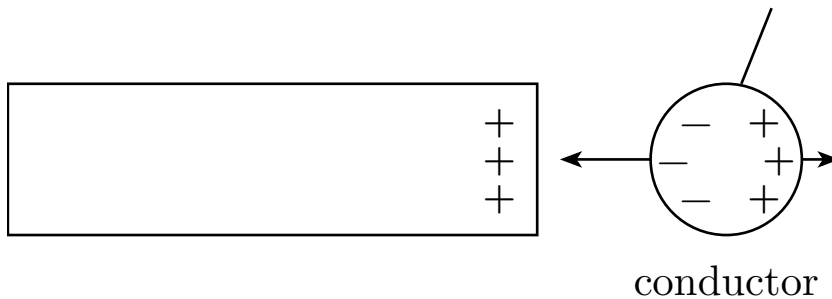

- **Dielectric Polarization**

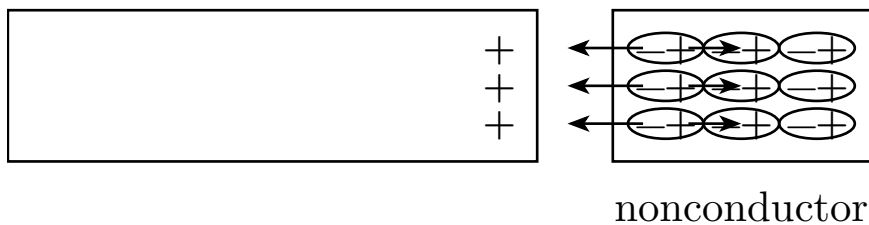

1.5 Electric Field

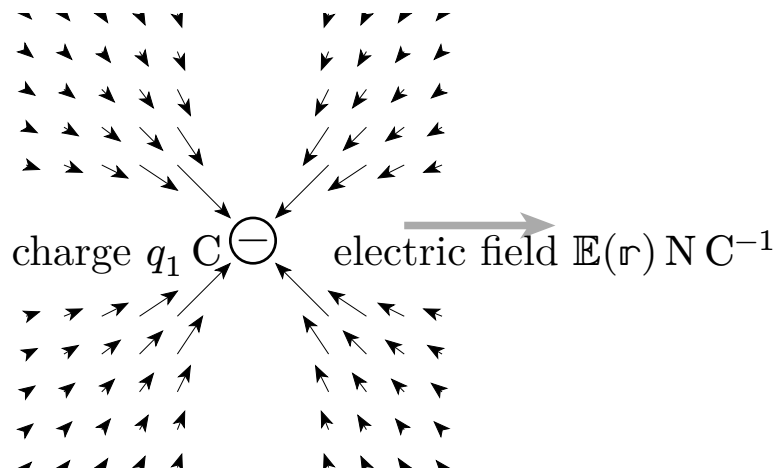

Electric field is vector field.

Let 1 C charge be a test charge at position $\mathbf{r}$, $\mathbb{E}(\mathbf{r})$ is the electric force which the test charge receive.

$$\mathbb{E}(\mathbf{r}) = kQ \frac{\mathbf{r}}{|\mathbf{r}|^3} \quad (3)$$

If there are multiple charges, the electric field is equals to sum of each electric fields made by these charges.

1.6 Electric line of force


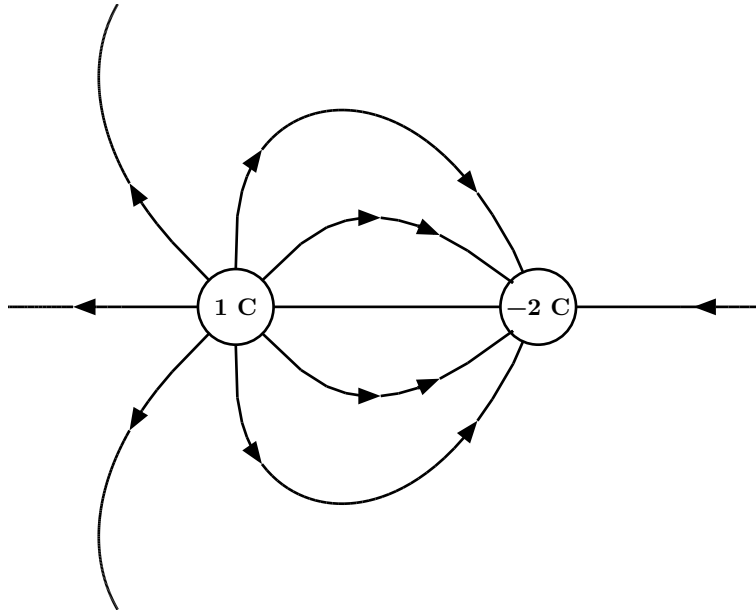


Figure 1: simulator

(it was difficult to draw the figure...)

- the direction of tangent of line is the same as the direction of the field's vector.
- the line appears with plus charge and disappear with minus charge.
- E lines drawn per 1 m^2 , as strength of electric field is $E \text{ N C}^{-1}$.



Let N be number of lines, Q amount of charge.

$$N = E \cdot 4\pi r^2 = k \frac{Q}{r^2} \cdot 4\pi r^2$$

Thus,


$$N = 4\pi kQ \quad (4)$$

1.7 Electric Potential

Let U potential energy of charge which have q , V electric potential,

$$V := \frac{U}{q} \quad (5)$$

Thus, V is potential energy per unit charge.



Let infinity be reference level of potential,


$$V(r) = \int_r^\infty dr \cdot k \frac{Q}{r^2} = kQ [-r^{-1}]_r^\infty = k \frac{Q}{r}$$

$$V(r) = k \frac{Q}{r} \quad (6)$$




$$V_{AB} = V_A - V_B \text{ (reference is } B)$$

V_{AB} is also called **voltage**.

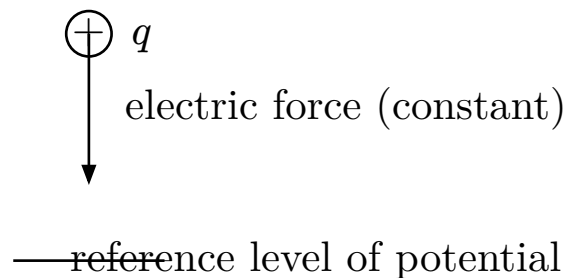

$$W_{AB} = q(V_A - V_B) \quad (7)$$

1.8 Relative of Field and Potential

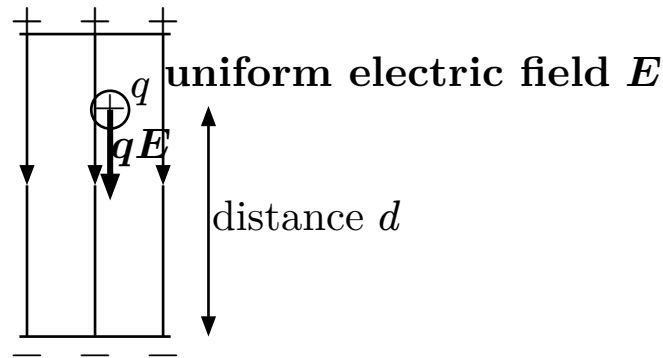

$$\begin{aligned} qEd &= qV \\ \Leftrightarrow V &= Ed \end{aligned} \tag{8}$$

electric potential is proportional to energy, so it's superposition is calculated by sum.

1.9 Equipotential Surface

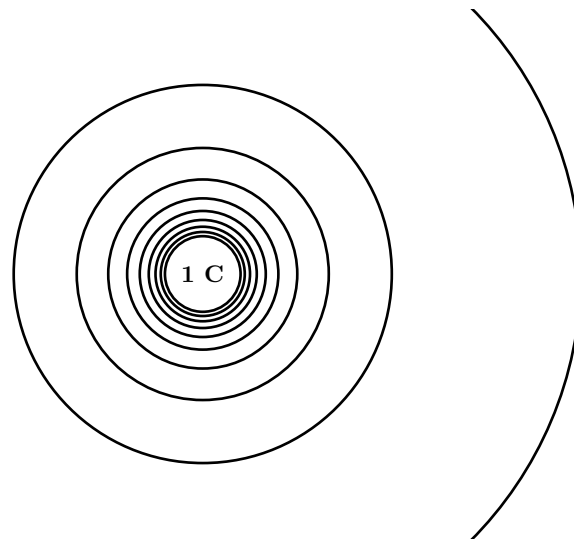


Figure 2: simulator

- **Equipotential Surface** - A surface which was made by joining points that have equal electric potential.


equipotential surface is perpendicular to electric line of force.

(if test charge move with a direction perpendicular to electric force , work is $W = \mathbb{F} \cdot \Delta \mathbf{x} = 0 \Leftrightarrow$ potential is same constantly.)

$$\frac{1}{2}mv^2 + qV = \text{const.} \tag{9}$$

1.10 Substance and Electric Field

1.10.a Conductor

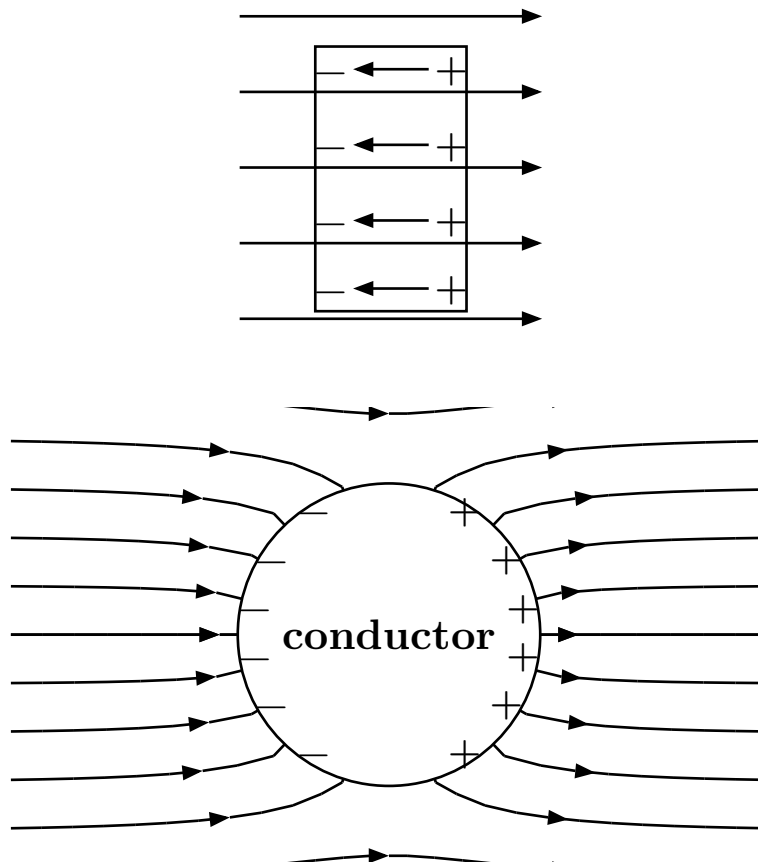

In conductor, the electric field is 0. (charges continue moving while field is not 0,)

It means that electric potential is the same in metal.

- **Electric field is perpendicular to surface of metal.** (metal distorts surrounding electric field)
- **Electric charges do not appear in internal of metal.** (on surface only)

(why? is not impossible to make field 0 with it having charges in metal? そうかな...そうかも...引力と斥力があるから自動的に表面にできるかね。べつに全電荷が打ち消しに貢献する必要はなく、正負が surface に交互に并んでいればいい?)

- **Electric Shielding** - In cavities in conductor, electric field is ~ 0 . It means field in the cavity is not affected by the outside field.

(これマジでなんで??)

1.10.b Nonconductor

In nonconductor, the electric field is smaller than the outside field. (due to the electric field generated by dielectric polarization)

1.11 Capacitor




Figure 3: parallel-plate capacitor

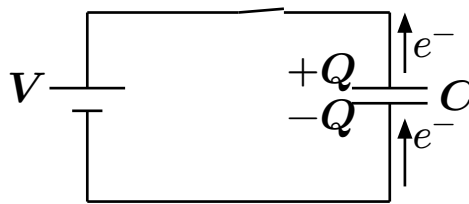


Figure 4: charging

$$C := \frac{V}{Q} \quad (10)$$

Parallel-plate capacitor makes uniform electric field.

It makes $4\pi kQ$ lines of electric force .

(電気力線って superposition できるの? uniform であることは積分で証明?)

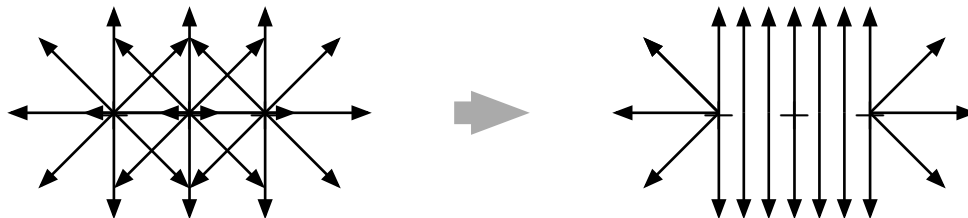



Figure 5: superposition of electric field which made by lined charges

Let

surface area of one side plate S ,

amount of electric charge Q ,

distance between plates d

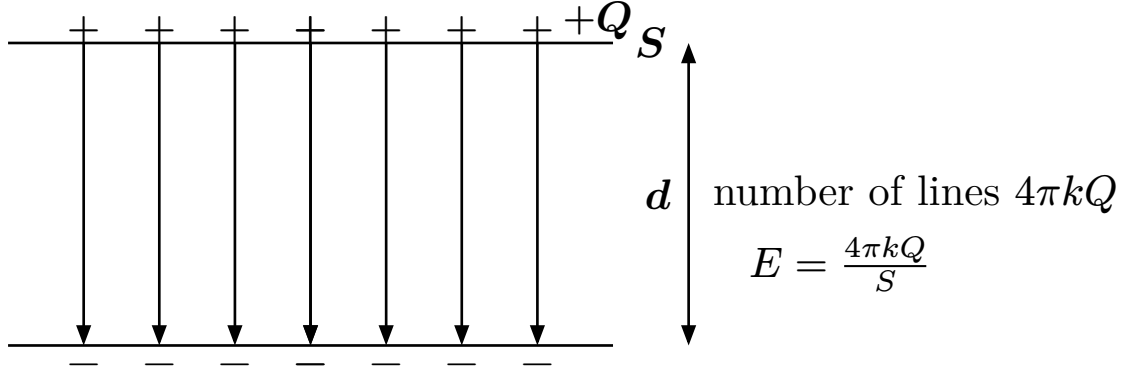

$$V = Ed = \frac{4\pi kQ}{S}d$$

$$Q = \frac{1}{4\pi k} \cdot \frac{S}{d} \cdot V$$

$$\therefore C = \frac{1}{4\pi k} \cdot \frac{S}{d} \quad (11)$$

Electric capacity depends on k , S , and d .

Where, let $\varepsilon = \frac{1}{4\pi k}$, ε is called permittivity.


$$C = \varepsilon \cdot \frac{S}{d} \quad (12)$$

In a lower permittivity substance, strength of the electric field is smaller.

From $V = k \cdot \frac{Q}{r}$, even with the same voltage, the amount of charge is greater.

dielectric constant : $\varepsilon_r = \frac{\varepsilon}{\varepsilon_0}$

1.11.a Series Connection

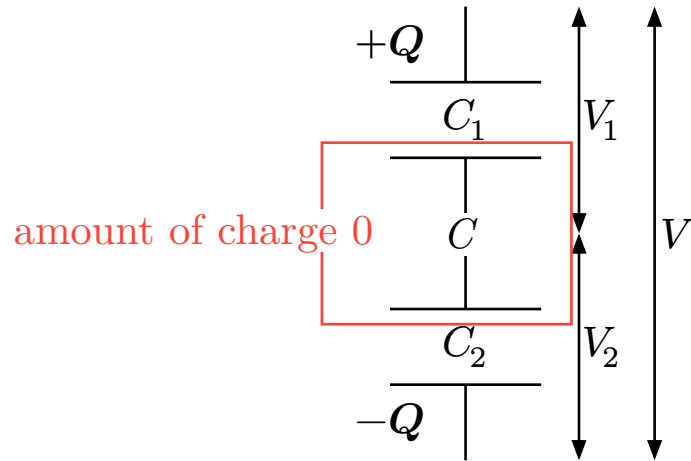

The amount of charge is 0, because one side plate of each is connected by the conductor.


$$V = V_1 + V_2$$

$$\frac{Q}{C} = \frac{Q}{C_1} + \frac{Q}{C_2} \quad (\because V = \frac{Q}{C})$$

$$\therefore C^{-1} = C_1^{-1} + C_2^{-1} \quad (13)$$

– V is proportional to C^{-1}

1.11.b Energy of capacitor

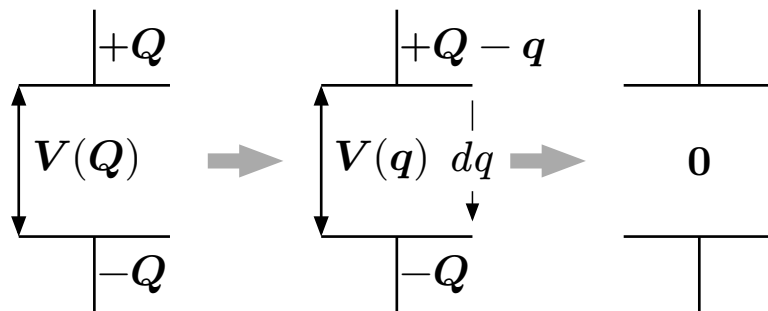

$$V(q) = \frac{q}{C}$$

$$W = \int_0^Q dq \cdot V(q) = \int_0^Q dq \cdot \frac{q}{C} = \frac{1}{2} \frac{Q^2}{C} = \frac{1}{2} QV \quad (14)$$

$$\therefore W = \frac{1}{2} QV \quad (15)$$

The work which battery has done : $W = QV$. ($V = \text{const.}$)

Therefore Work: $\frac{1}{2}QV$ is wasted.




Figure 6: The start of charging

2 *Electric Current*

2.1 Current

Electric Current - A flow of charged particles.

- **Direct Current** - a current that is one-directional
- **Alternating Current** - a current that periodically reverses direction


I : current (constant), Q : amount of charge, t : time

$$I := \frac{Q}{t} \quad (16)$$

$$\text{A} = \text{C s}^{-1}$$


2.2 Ohm's law

Let elementary charge e , speed of charges v , number of charges per unit volume n , surface of wire S ,

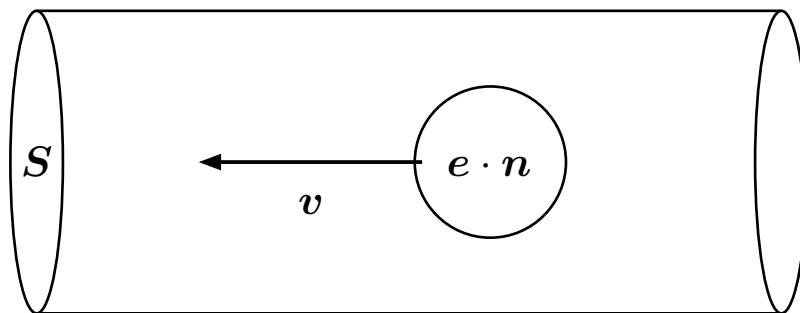

$$Q = e \cdot n \cdot vt \cdot S$$

$$\therefore I = envS$$

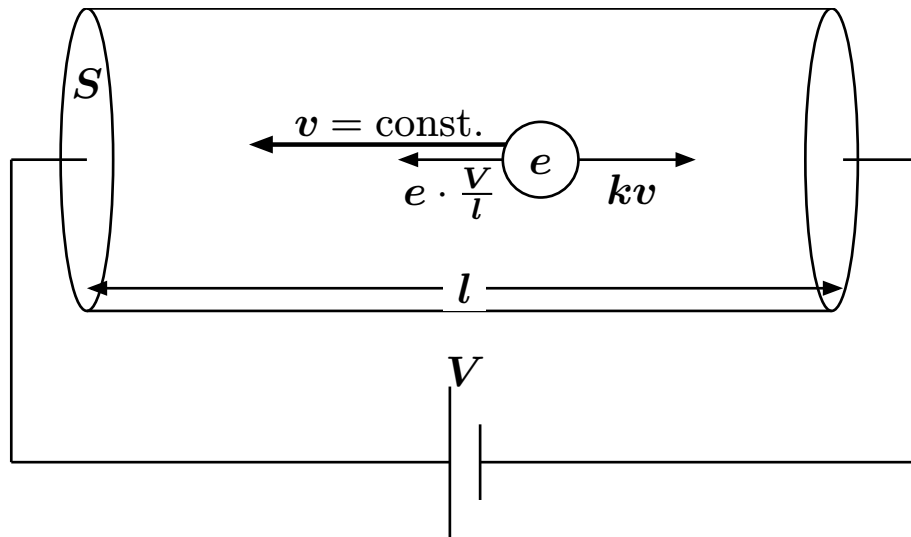

There should be force kv ($k = \text{const.}$) which against electric force $e \cdot \frac{V}{l}$, because velocity of electron $v = \text{const.}$

※ energy が低い ≠ 安定

$$kv = e \frac{V}{l}$$

$$\Leftrightarrow v = e \frac{V}{lk} \quad (v \propto E)$$

$$\Leftrightarrow I = en \cdot e \frac{V}{lk} \cdot S \quad (\because I = envS)$$

$$\Leftrightarrow I = e^2 n \frac{S}{kl} \cdot V$$

Let $k \frac{l}{e^2 n S}$ as R ,

$$I = \frac{V}{R}$$

$$\therefore V = RI \quad (17)$$

$$R = \frac{1}{e^2 n} \cdot \frac{l}{S} \quad \text{Let } \frac{1}{e^2 n} \text{ as } \rho,$$

$$R = \rho \frac{l}{S} \quad (18)$$

ρ is called **resistivity** and depends on substances. (resistivity of aluminium is $\sim 2.7 \cdot 10^{-8}$)

ちうがくせいのところよく分からなかったのが解消されていったのしー!!

Resistivity also depends on temperature due to thermal motion.

$$\rho \approx \rho_0 \cdot (1 + \alpha t) \quad (19)$$

ρ_0 is resistivity at $t = 0$, t is temperature. α is called **temperature coefficient of resistivity**.

いまさらだが保存力ってけっこう難しい .field を解析してどうなったら保存力なんだろう .位置にのみ依存することが必要条件になってはいそう .十分条件はなんなの 直感的な理解が足りていません。百足らず様がお通りになられたせいでしょうか。