Specification for approval

Name: **PCM**

Voltage: 3.7V

Model: **RD-1175**

Component


1.Control: dual control

2.Control IC : DW01+


3.MOS : 8205

No.	Test content	Standard	Test data			
			1	2	3	4
VDET1	Over charge protect voltage	4.275±0.05V				
VDET2	Over discharge protect voltage	2.5±0.075V				
VDET3	Over current protect voltage	0.15±0.03V				
TVDET1	Over charge protect delay	≤80ms				
TVDET2	Over discharge protect delay	≤40ms				
TVDET3	Over discharge current protect dela	10ms				
TVDET4	Over charge current protect delay	5ms				
Istandy	static current consumption	0.1ua				
RDS	PCB Restiance	R≤ 50mΩ				


SMD pcb board diagram (front)

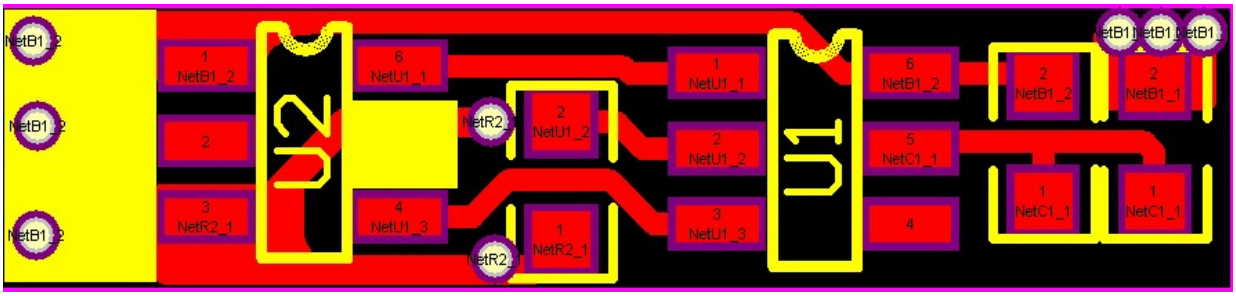

PCB board external view (negative)

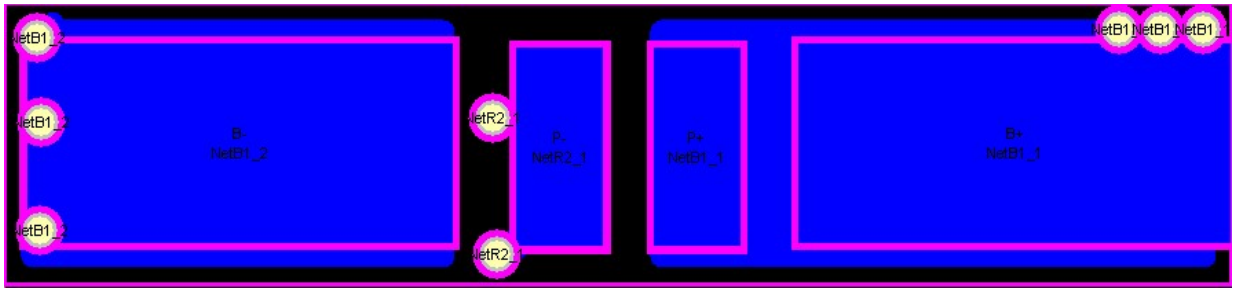


PCB Size

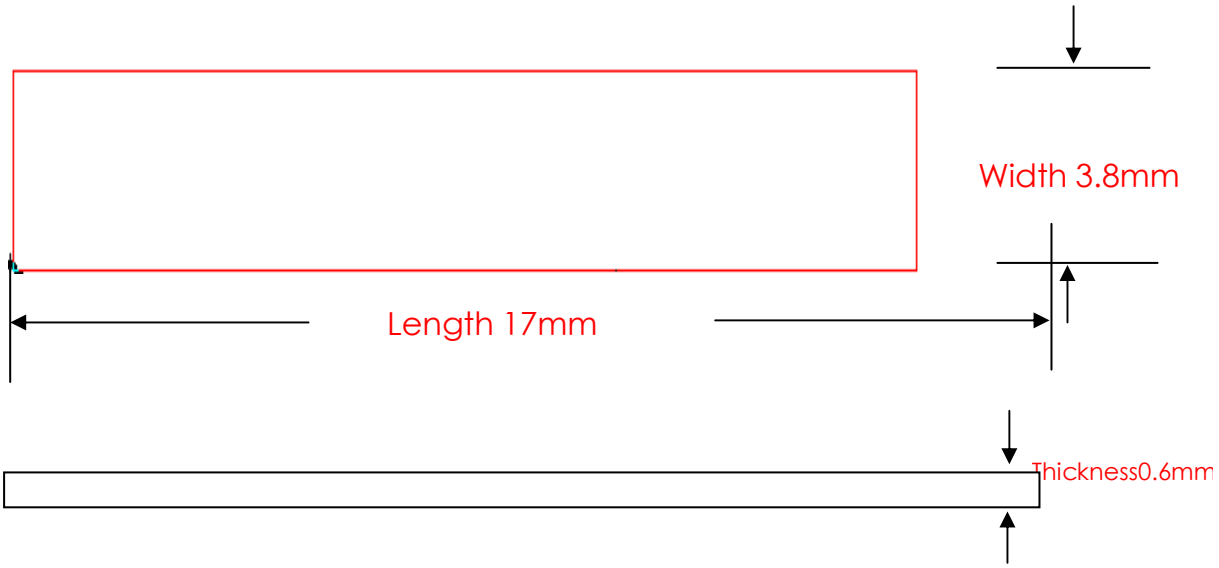

Note:

Length ± 0.15mm, Width ± 0.10mm, Thickness 0.10mm

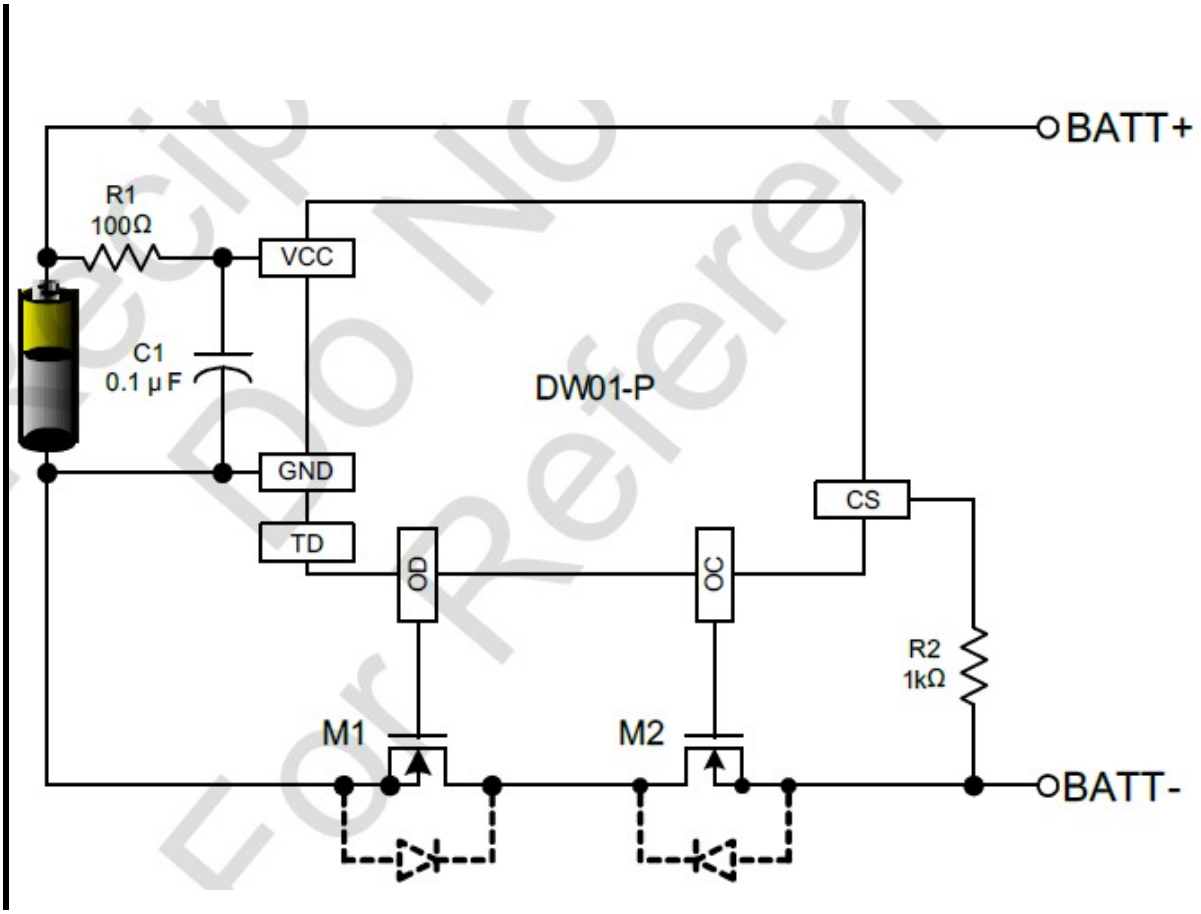
BATT+
R1
100Ω
VCC
C1
0.1 µF
DW01-P
GND
TD
OD
OC
CS
R2
1kΩ
M1
M2
BATT-